
Rittal – The System.

Faster – better – worldwide.

Rittal TopTherm air conditioners Generation “Blue e”



- **Savings of up to 45% energy consumption**
- **Units with Comfort controller are now “Blue e” – Part Numbers remain unchanged**

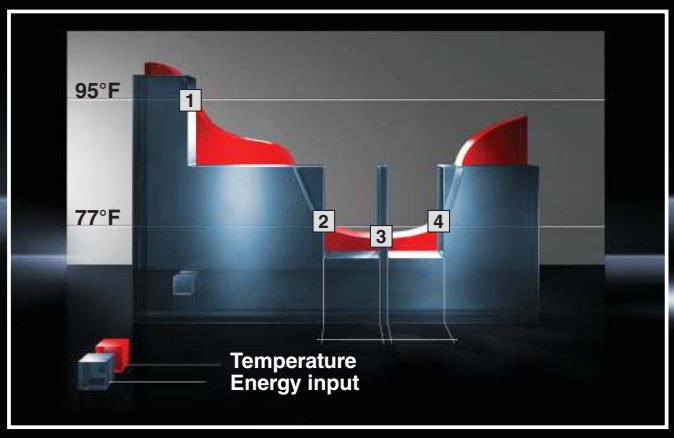

TopTherm air conditioner

- These energy-saving air conditioners are available with output from 1700 to 16800 BTU (500 to 4000 W)
- Savings of up to 45% energy consumption with the same cooling output; up to 70% energy savings compared with a conventional Rittal TopTherm Plus air conditioner in field trials
- Previous units with Comfort controller are now “Blue e” generation; part numbers remain the same
- Identical cut-out dimensions

Eco-mode control

Intelligent, targeted use of energy thanks to the new eco-mode control from Rittal

1. Cooling switches off: The internal fan only runs to ensure air circulation inside the enclosure.
2. The internal fan is switched off.
3. The internal fan is switched on for 30 seconds every 10 minutes to briefly blend the air.
4. The internal fan is switched back on.

Product conversion guide from units with Basic controller to units of the “Blue e” generation.

Roof-mounted air conditioner

Basic controller				Generation “Blue e”
Part No.	Useful cooling output Q_K BTU (W)	Dimensions H x W x D inches (mm)	Voltage V, Hz	**Part No.**
3382.100	1708 (500)	16 x 24 x 15 (417 x 597 x 380)	230, 50/60	**3382.500**
3382.110			115, 50/60	**3382.510**
3359.100	2561 (750)		230, 50/60	**3359.500**
3359.110			115, 50/60	**3359.510**
3359.140			400, 2~, 50/60	**3359.540**
3383.100	3415 (1000)	16 x 24 x 19 (417 x 597 x 475)	230, 50/60	**3383.500**
3383.110			115, 50/60	**3383.510**
3383.140			400, 2~, 50/60	**3383.540**
3384.100	5123 (1500)		230, 50/60	**3384.500**
3384.110			115, 50/60	**3384.510**
3384.140			400, 2~, 50/60	**3384.540**
3385.100	6830 (2000)		230, 50/60	**3385.500**
3385.110			115, 50/60	**3385.510**
3385.140			400, 2~, 50/60	**3385.540**
3386.140	10246 (3000)	19 x 31 x 23 (470 x 796 x 580)	400, 3~, 50 460, 3~, 60	**3386.540**
3387.140	13661 (4000)		400, 3~, 50 460, 3~, 60	**3387.540**

Air conditioner versions in stainless steel may be found on the Internet.
Note: An additional system relay is available. For connection diagram, see the latest assembly instructions under www.rittal-corp.com

Wall-mounted air conditioner

Basic controller				Generation “Blue e”
Part No.	Useful cooling output Q_K BTU (W)	Dimensions H x W x D inches (mm)	Voltage V, Hz	**Part No.**
3303.100	1708 (500)	22 x 11 x 8 (550 x 280 x 200)	230, 50/60	**3303.500**
3303.110			115, 50/60	**3303.510**
3361.100	2561 (750)	22 x 11 x 11 (550 x 280 x 280)	230, 50/60	**3361.500**
3361.110			115, 50/60	**3361.510**
3361.140			400, 2~, 50/60	**3361.540**
3304.100	3415 (1000)	37 x 16 x 10 (950 x 400 x 260)	230, 50/60	**3304.500**
3304.110			115, 50/60	**3304.510**
3304.140			400, 3~, 50 460, 3~, 60	**3304.540**
3305.100	5123 (1500)		230, 50/60	**3305.500**
3305.110			115, 50/60	**3305.510**
3305.140			400, 3~, 50 460, 3~, 60	**3305.540**
3366.100	3415 (1500)	62 x 18 x 8 (1590 x 435 x 205)	230, 50/60	**3366.500**
3366.110			115, 50/60	**3366.510**
3366.140			400, 3~, 50 460, 3~, 60	**3366.540**
3328.100	6830 (2000)	62 x 16 x 11 (1580 x 400 x 295)	230, 50/60	**3328.500**
3328.110			115, 50/60	**3328.510**
3328.140			400, 3~, 50 460, 3~, 60	**3328.540**
3329.100	8537 (2500)		230, 50/60	**3329.500**
3329.110			115, 50/60	**3329.510**
3329.140			400, 3~, 50 460, 3~, 60	**3329.540**
3332.140	13661 (4000)	62 x 20 x 13 (1580 x 500 x 340)	400, 3~, 50 460, 3~, 60	**3332.540**

Air conditioner versions in stainless steel, NEMA 4X and with climate control doors may be found on the Internet.
Note: An additional system relay is available. For connection diagram, see the latest assembly instructions under www.rittal-corp.com

Rittal Corporation
1 Rittal Place • Urbana Ohio 43078 • USA
Phone: 937-399-0500 • Fax: 800-477-4003 • Toll-free: 800-477-4000
Email: rittal@rittal-corp.com • Online: www.rittal-corp.com

05/12 • US212