


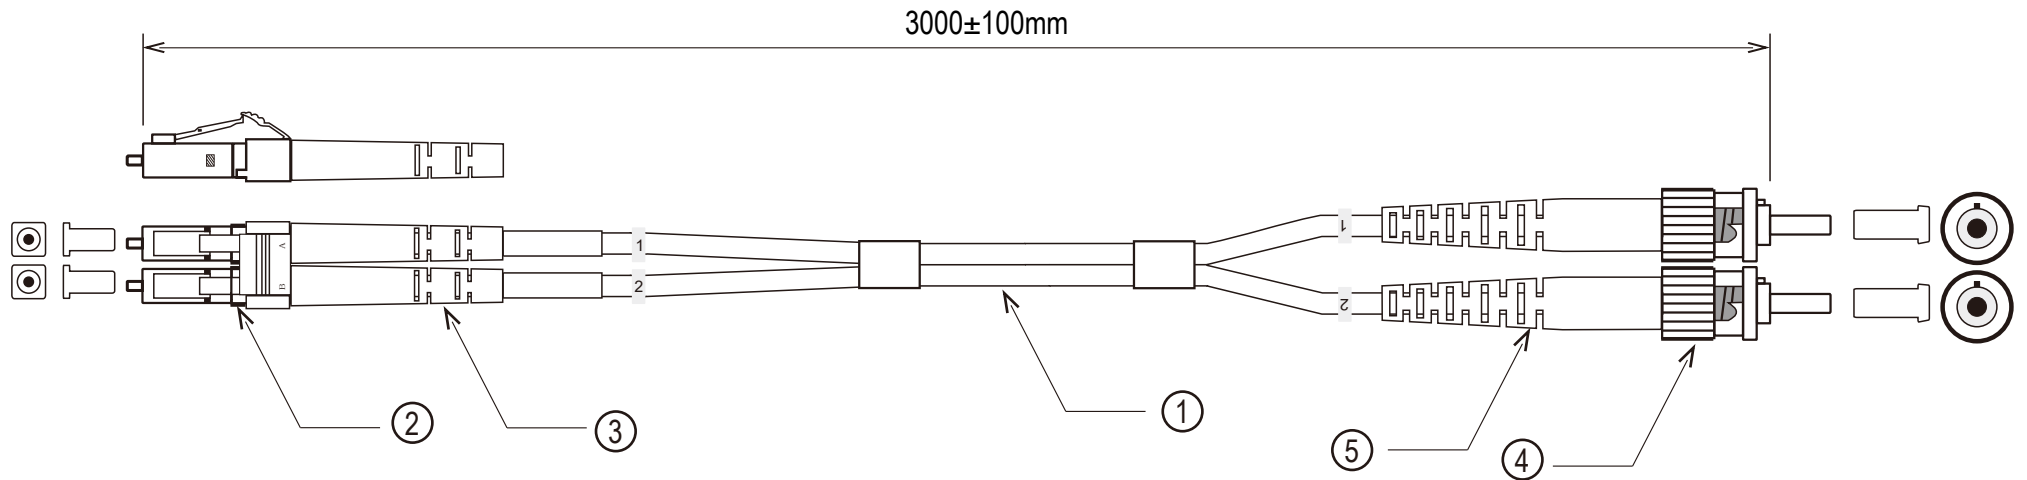

Specifications

Insertion Loss(dB)	≤ 0.3	
Return Loss(dB)	≥ 35	
Plug Housing Color	PLUG1 Beige	PLUG2 Matel
Boot Color	BOOT1 White	BOOT2 Black
Operating Temperature(°C)	-30~+75	
Storage Temperature(°C)	-30~+85	
Operating Wavelength(mm)	850	

NOTE:

ALL FIBER CABLE ARE TESTED BY INSERTION LOSS/RETURN LOSS TEST STATION AND INTEGRATED OPTICAL FIBER END FACE INSPECTION EXPERTS

⑤	BOOT2	1PCS	Black
④	PLUG2	1PCS	ST/UPC,Matel
③	BOOT1	1PCS	White
②	PLUG1	1PCS	LC/UPC,Beige
①	CABLE	1PCS	Φ 2.0mm 62.5/125 OM1 LSZH (orange)
NO.	PARTS NAME	Q'TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	LCST-3M
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

PATCHCORD,LC/UPC-ST/UPC
DX,62.5/125 OM1,LSZH

