CHIEF®

Digital Signage

professional av mounts







Maximize the impact of content with Chief's multi-monitor and flat panel display mounts, ceiling mounts, and carts and stands. Chief mounts assist in the visibility of digital signage, providing easy installation and flexible viewing options. Chief is prepared to take on any project from creation through logistics, understanding the specific requirements that go hand-in-hand with today's digital signage applications.

DIGITAL SIGNAGE MOUNTING SOLUTIONS

Chief understands the specific requirements that go hand-in-hand with digital signage to ensure proper flat panel placement and maximize the impact of the content. Providing strong, functional, aesthetically pleasing and easy-to-install products to help meet diverse needs is our top priority. Retailers, hotels and airports around the world integrate Chief mounts into innovative projects that showcase the best in technology. Choose from wall, ceiling or mobile styles, all which include varying degrees of flexible positioning.







MEDIUM

LARGE

EXTRA LARGE



FIXED MOUNTS



TILT M

*MSMU™

Mounting Pattern Range 100 x 100 mm up to 650 x 400 mm

47″ 125 lbs (56.7 kg)



*MTMU™


Mounting Pattern Range

47″ 125 lbs (56.7 kg)

*LSMU™

Mounting Pattern Range 200 x 200 mm up to 879 x 506 mm

63″ 200 lbs (90.7 kg)



*LTMU™


Mounting Pattern Range

63″ 200 lbs (90.7 kg)

XSMU™

Mounting Pattern Range 200 x 200 mm up to 1229 x 685 mm

75″ 250 lbs (113 kg)

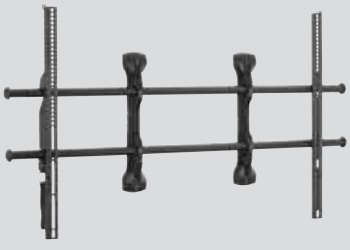

XTMU™

Mounting Pattern Range

75″ 250 lbs (113 kg)

For more information on Chief products, visit us on the web at www.chiefmfg.com.



OUNTS

100 x 100 mm up to
667 x 400 mm





SWING ARM MOUNTS

JWDU™

Mounting Pattern Range 100 x 100 mm up to 400 x 400 mm

Extends 20.38" (518 mm)

45"
75 lbs
(34 kg)



MWRU™

Mounting Pattern Range 100 x 100 mm up to 709 x 431 mm

Extends 24.88" (632 mm)

50"
125 lbs
(56.7 kg)




PWRU™ (also available)

PDRU™

Mounting Pattern Range 200 x 200 mm up to 862 x 517 mm

Extends 38.38" (949 mm)

71"
200 lbs
(90.7 kg)



PNRU™ (also available)
Extends 24.88 (63.2 cm)



CEILING MOUNTS

JHSU™

Mounting Pattern Range 100 x 100 mm up to 400 x 400 mm

45"
75 lbs
(34 kg)



MCSU™

Mounting Pattern Range 100 x 100 mm up to 709 x 431 mm

55"
125 lbs
(56.7 kg)



PCSU™

Mounting Pattern Range 200 x 200 mm up to 862 x 517 mm

71"
200 lbs
(90.7 kg)




PDCU™ (also available)
Dual Ceiling Mount
up to 350 lbs (158.7 kg)

200 x 200 mm up to
895 x 506 mm



200 x 200 mm up to
1249 x 685 mm



LARGE DISPLAY CARTS & STANDS



CARTS & STANDS

PF1™

Mounting Pattern Range 200 x 200 mm up to 862 x 517 mm

71″ 200 lbs (90.7 kg)



PF2™ (also available)
Dual Display Stand for displays up to 71″ and 200 lbs (90.7 kg)

PFC™

Mounting Pattern Range 200 x 200 mm up to 862 x 517 mm

71″ 200 lbs (90.7 kg)



PFM™

Mounting Pattern Range 200 x 200 mm up to 862 x 517 mm

71″ 200 lbs (90.7 kg)



CUSTOM & UNIVERSAL PROJECTOR MOUNTS



PROJECTOR MOUNTS

RPA Elite™

50 LBS (22.7 kg)



- RapidFire™ dual disconnect system for fast installation and lamp/filter access
- MicroZone™ adjustment for fast and precise projector registration
- Q-Lock™ integrated security
- Custom and universal interface options

FUSION SERIES MOUNTS


DISCOVER THE 4 C'S OF MOUNTING


1 **CENTERLESS™ LATERAL SHIFT**
Get up to 16" of post-installation lateral shift - 8" left/right of uprights.


2 **CONTROLZONE™ HEIGHT & ROLL ADJUSTMENT**
Fine-tune height and leveling after the mount is installed by inserting an Allen key into the ports located at the top of the uprights.


3 **CENTRIS™ LOW-PROFILE TILT**
Provides effortless tilting by using the center of gravity to balance the screen – no tools necessary!

4 **CLICKCONNECT™ TOOL-LESS LATCHING**
Hear an audible click when the screen safely engages with the mount. Use the built-in cable stand to gain easy access under the screen.

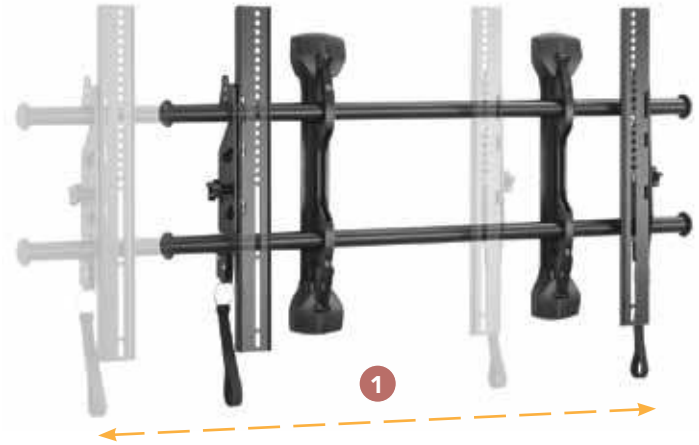









ADD ACCESSORIES TO CREATE A CUSTOM CONFIGURATION

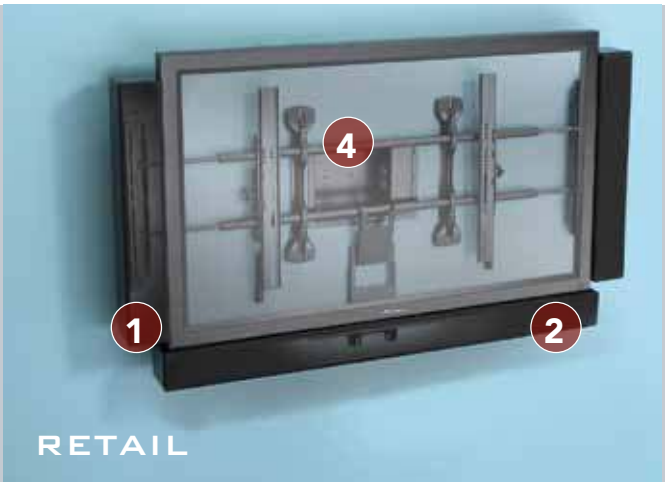

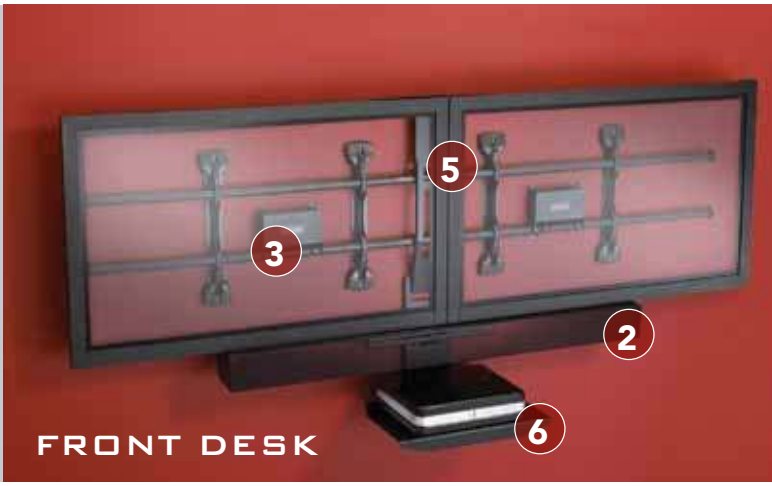



FLR100™
Left/Right Speaker Adapter

1



FCC100™
Center Channel Speaker Adapter

2



FCA100™
Cat 5/Surge Adapter

3



PAC521P™
In-Wall Power Box

4



FCK008™ & FCK016™ *
8" and 16" Connector Kit

5



FCD100™ **
Additional Component Shelf - below

6

** FCK008 recommended when installing 37-42" screens on L-series of Fusion. All others can use the FCK016.*
*** Can be used with FCS100, FCC100 or FVS100/150 shelves.*

CHIEF ACCESSORIES

ACCESSORY SHELVES

PAC102B™

- Shelf for pole installations
- Weight Capacity: 20 lbs (9.1 kg)
- All mounting hardware included for 1.5" NPT installation



PAC150™

- Video conferencing shelf
- Compatible with 8" (203 mm) and 14" (356 mm) Q-latch pattern mounts
- Weight Capacity: 10 lbs (4.5 kg)
- Height Adjustable: 5.25"



PAC710™

- Carts and stands accessory self
- Easy to install and adjust
- Weight Capacity: 25 lbs (11.34 kg)
- Compatible with PFC, MFC, PF1, MF1, PF2 and MF2 products



DUAL DISPLAY ACCESSORY

PAC720™

- Infinitely height adjustment
- Ships fully assembled
- Weight Capacity: 200 lbs (90.7 kg)
- Compatible with PFC, and PF1 products.



SPEAKER ADAPTERS

PACCC1™

- Fully assembled
- Low profile
- Expandable for 30 - 50" Flat Panels
- Compatible with 8" (203 mm) and 14" (356 mm) Q-Latch patterns



PACLR1™

- Fully assembled
- Low profile
- Expandable for 30 - 50" Flat Panels
- Compatible with 8" (203 mm) and 14" (356 mm) Q-Latch patterns



MEDIA ADAPTER

PAC251™

- Adapts to 14" (356 mm) Q-Latch pattern
- Easy access to drives and connections
- Compatible with media devices up to: (WxHxD) 14.5 x 16 x 4.5" (368 x 406 x 114 mm)



MAC251™ for M-series Q-Latch products

EXTENSION COLUMNS

CMS™ Fixed & Adjustable

- Fixed or Adjustable Extension Columns available
- Weight Capacity: 500 lbs (227 kg)
- Cable management
- Available in black, silver and white



CEILING PLATES

CMA372™

- Offset Unistrut Adapter
- Features offset for transactioning cables out of extension columns
- Including spring nuts and bolts to attach to 1.63" (41 mm unistrut
- Weight Capacity: 500 lbs (227 kg)



CMA330™

- Offset Ceiling Plate
- Offset provides cable exit when mounting to flat ceiling surfaces
- Offset Height: 1.75" (45 mm)
- Weight Capacity: 500 lbs (227 kg)



CMA395™

- Angled Ceiling Plate
- Adjustable for installaion on angled ceilings
- Weight Capacity: 500 lbs (227 kg)
- Available in black and white



©2009 Milestone AV Technologies, a Duchossois Group Company. 900010A 2/09. Chief is a registered trademark of Milestone. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending. Printed in the USA.