



| DATE | REV | DESCRIPTION | BY | CHKD |
|------|-----|-------------|----|------|
|      | A/0 |             |    |      |
|      |     |             |    |      |
|      |     |             |    |      |

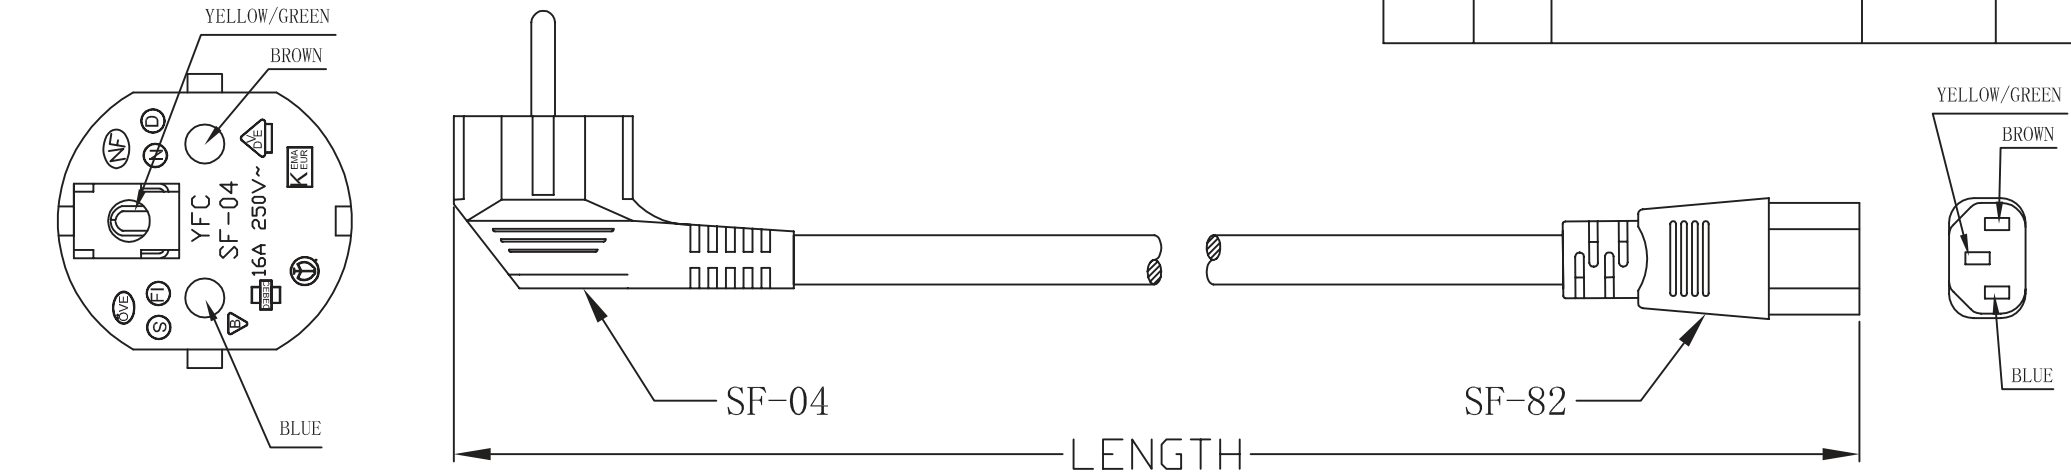

| Conductor       |              | Insulation |           |               | Jacket    | Overall diameter |
|-----------------|--------------|------------|-----------|---------------|-----------|------------------|
| MM <sup>2</sup> | Construction | Diameter   | Min Thick | MIN AVG Thick | Min Thick |                  |
| 0.75            | 24/0.190mm   | 2.4±0.05mm | 0.44mm    | 0.6mm         | 0.58mm    | 6.8±0.1mm        |

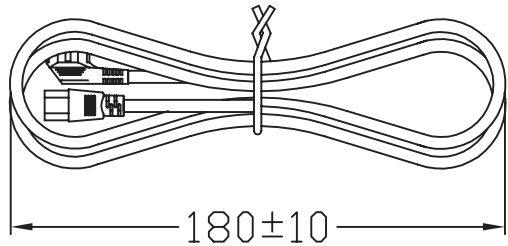

- NOTES:
1. WIRE: H05VV-F 3G0.75MM<sup>2</sup>
  2. PLUG: YFC P/N SF-04+ SF-82
  3. LENGTH: 1800±20MM
  4. COLOR: BLACK
  5. PACKING: 10pcs/poly bag

Unless specified on the drawing, tolerances are per the follows:

|     |        |
|-----|--------|
| .   | ± 1    |
| .X  | ± 0.1  |
| .XX | ± 0.05 |

|     |  |
|-----|--|
| 3RD |  |
|-----|--|

**quip®**

Power Cable 1.8m black  
grounding type (Schuko) plug > inlet jack  
for non-heating apparatus