

HDMI over CAT6 Extender | 4K 60Hz


Product Diagram (ST121HD20L)

Transmitter and Receiver Front View



Component		Function
Transmitter and Receiver		
1	Power LED Indicator	• Solid green when the Universal Power Adapter is connected
Transmitter		
2	Link LED Indicator	• Solid green when the HDMI Source Device is connected
Receiver		
2	Link LED Indicator	• Solid green when the CAT6 Cable is connected and the HDMI Source Device Video Signal is active

Transmitter and Receiver Rear View

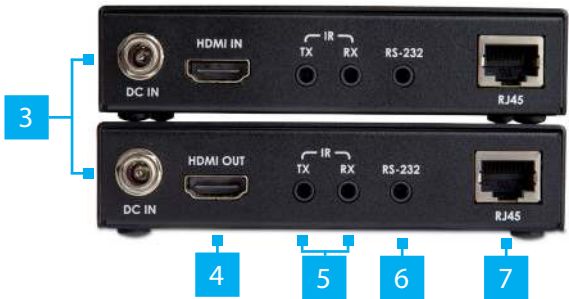

Port		Function
Transmitter and Receiver		
3	DC IN Ports	• Power the Transmitter and Receiver • Secure the Universal Power Adapters into the DC IN Ports by inserting the Barrel Connectors on the Universal Power Adapters and turning the Screw Locks clockwise
4	HDMI IN and OUT Ports	• Connect an HDMI Source and HDMI Display Device
5	IR TX and RX Ports	• Connect the IR (Infrared) Blasters and Receivers to control the HDMI Source and HDMI Display Device from the Transmitter or Receiver • Bi-directional to support different IR configurations
6	RS-232 Extension Ports	• Connect any Serial Device to extend the signal over CAT6 Cable
7	RJ45 Ports	• Connect the CAT6 Cable to extend the signal from the Source Device to the HDMI Display Device

Requirements

For the latest requirements and to view the full User Manual, please visit www.startech.com/ST121HD20L.

- HDMI Source Device x 1
- HDMI Display Device x 1
- CAT6 Cable x 1
- (Optional) Surface for Mounting x 1

Installation

Installing the HDMI Transmitter and Receiver

1. Position the **Transmitter** near the **HDMI Source Device**.
2. Connect an **HDMI Cable** to the **HDMI Source Device** and to the **HDMI IN Port** on the back of the **HDMI Transmitter**.

3. Connect a **CAT6 Cable** (included) to the **RJ45 Port** on the back of the **HDMI Transmitter** and to the **RJ45 Port** on the back of the **HDMI Receiver**.
***Note:** The cabling should not go through any networking equipment (e.g. router, switch, etc.).*
4. Position the **HDMI Receiver** near the **HDMI Display Device**.
5. Connect an **HDMI Cable** to the **HDMI OUT Port** on the back of the **HDMI Receiver** and to the **HDMI Display Device**.
6. Connect the **Universal Power Adapters** to the **DC IN Ports** on the **Transmitter** and **Receiver** and to two **AC Electrical Outlets**.

Installing the IR Blaster and IR Receiver

Control the HDMI Display Device from the Transmitter

1. Connect the **Infrared Receiver** (oval shaped) to the **IR - TX Port** on the **Transmitter**.
2. Peel the **Film** off of the **Adhesive Pad** that is located on the **Infrared Receiver**. Stick the **Infrared Receiver** in a location where there is a clear path to the **Remote Control**.
***Note:** Ensure there is an unobstructed path to the **Infrared Receiver**. Infrared signals require a direct line of sight to function.*
3. Connect the **Infrared Blaster** (L shaped) to the **IR - RX Port** on the **Receiver**.
4. Peel the **Film** off of the **Adhesive Pad** that is located on the **Infrared Blaster**. Stick the **Infrared Blaster** on the **HDMI Display Device** so that it is pointing directly at the **IR Sensor** on the **Display**.

***Note:** Consult the **HDMI Display Device's** manual to determine the location of the **IR Sensor**.*

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.
CAN ICES-3 (B)/NMB-3(B)

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

5. Use the **Remote Control** for the **HDMI Source Device** to control the **HDMI Display Device** from the **Transmitter's** location.

Control the HDMI Source Device from the Receiver

1. Connect the **Infrared Blaster** (L shaped) to the **IR - RX Port** on the **Transmitter**.
2. Peel the **Film** off of the **Adhesive Pad** that is located on the **Infrared Blaster**. Stick the **Infrared Blaster** so that it is pointing directly at the **IR Sensor** on the **HDMI Source Device**.

***Note:** Consult the **HDMI Source Device's** manual to determine the location of the **IR Sensor**.*

3. Connect the **Infrared Receiver** (oval shaped) to the **IR - TX Port** on the **Receiver**.
4. Peel the **Film** off of the **Adhesive Pad** that is located on the **Infrared Receiver**. Stick the **Infrared Receiver** in a location where there is a clear path to the **Remote Control**.

***Notes:** Infrared signals require a direct line of sight to function.*

*Consult the manual for the **HDMI Display Device** to determine the location of the **IR Sensor**.*

5. Use the **Remote Control** for the **HDMI Source Device** to control the **HDMI Source Device** from the **Receiver's** location.

Warranty Information

This product is backed by a two-year warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Safety Measures

- If product has an exposed circuit board, do not touch the product under power.

Mesures de sécurité

- Si l'un des circuits imprimés du produit est visible, ne pas touchez le produit lorsqu'il est sous tension.

安全対策

- 製品に露出した状態の回路基盤が含まれる場合、電源が入っている状態で製品に触らないでください。

Misure di sicurezza

- Se il prodotto ha un circuito stampato visibile, non toccare il prodotto quando è acceso.

Säkerhetsåtgärder

- Rör aldrig vid enheter med oskyddade kretskort när strömmen är påslagen.

StarTech.com Ltd.

45 Artisans Cres
London, Ontario
N5V 5E9
Canada

StarTech.com LLP

2500 Creekside
Parkwy
Lockbourne, Ohio
43137
U.S.A.

StarTech.com Ltd.

Unit B, Pinnacle 15
Gowerton Rd,
Brackmills
Northampton
NN4 7BW
United Kingdom

FR: fr.startech.com
DE: de.startech.com
ES: es.startech.com
NL: nl.startech.com
IT: it.startech.com
JP: jp.startech.com