


FLEX-FIT Duo

Ultra Slim ODD Bay + 3.5" to 5.25" Front Bay Bracket Adapter


ICY DOCK®

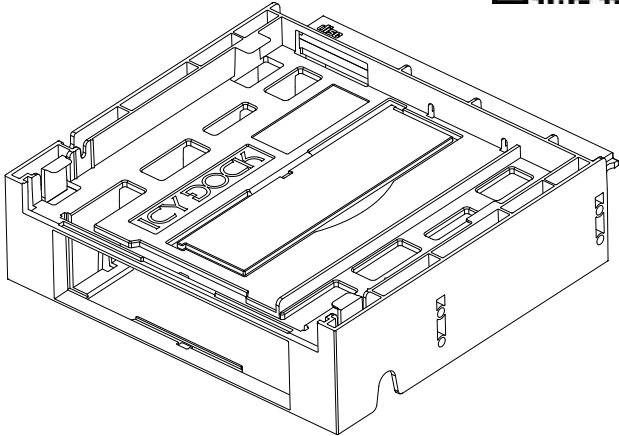


Copyright © ICY DOCK International. All Rights Reserved. 650240 VER 1.0

1

Package Contents • Packungsinhalt • Contenu • Contenido del paquete • 包装について • 包装説明 • 包装说明




Device




User manual



4 x M3*6 screw for device



2 x M3*6 black screw for 3.5" device



6 Pin Slimline SATA to 15 Pin SATA Power Cable



3 x M2*4 screw for Ultra Slim ODD (2 x screw for spare parts)



2 x #6-32*6 screw for 3.5" HDD (2 x screw for spare parts)



WARNING: Please use the included screws to secure the drive(s).


2

3.5" Device Installation • Installation eines 3,5" Gerätes • Installation du dispositif 3,5" • Instalación del dispositivo de 3,5" • 3.5" デバイス取付手順 • 3.5吋裝置安裝步驟 • 3.5吋设备安装步骤




NOTE: Ultra Slim ODD, 3.5" HDD & 3.5" device must be installed before mounting the FLEX-FIT Duo on to the computer case.

By using both thumbs, press against the locking mechanism with a protruding dot, as shown in the picture. Next, keep the pressure on your thumbs while sliding the 3.5" device in. **Before releasing your thumbs, make sure the protruding dot fits into the second screw holes on the sides of the 3.5" device, as shown in the picture.**

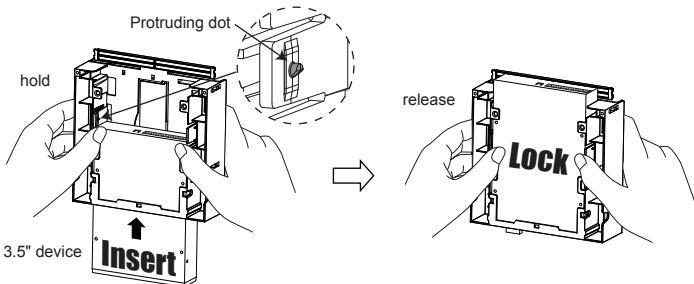


(Optional) Two M3*6 black screws can be installed into the front screw holes located on both sides of the device for extra stability.

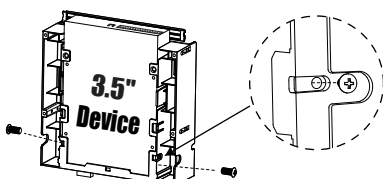


3

3.5" HDD Installation • Installation einer 3,5" HDD • Installation du disque dur 3,5" • Instalación de unidad de disco duro o unidad de estado sólido de 3,5" • 3.5" HDD取付手順 • 3.5吋硬碟安裝步驟 • 3.5吋硬盘安装步骤


3-1. Break off the dust cover from the middle of bracket and set it aside.



3-2. When installing 3.5" HDD, the locking mechanism cannot be used. Please use two #6-32*6 screws to mount the 3.5" HDD either on bottom (Option 1) or both sides (Option 2) of the bracket as shown in the picture below.

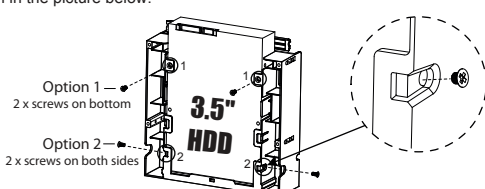


3-3. When installing 3.5" HDD or if no 3.5" device is installed, insert the dust cover into opening slot as the front for protection from dust and for aesthetic purpose.

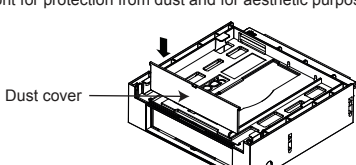


4

Ultra Slim ODD Installation • Optisches UltraSlim Laufwerk installieren • Installation de lecteur de disque optique ultrafin • Installation de lecteur Ultra Slim ODD • スリムタイプODDデバイスの取付手順 • 薄型光碟機安裝步驟 • 9.5mm笔记本光驱安装步骤

4-1 When installing Ultra Slim ODD. Please use the M2*4 screws to mount the Ultra Slim ODD as shown in the picture.

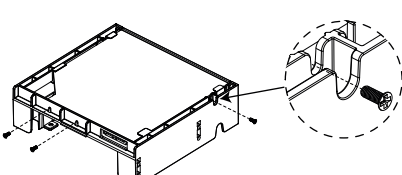

(Optional) When no Ultra Slim ODD is installed, insert the dust cover into opening slot as the front for protection from dust and for aesthetic purpose.

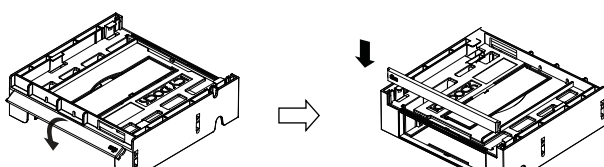

1. Break off the dust panel from the back and set it aside

2. Insert the dust panel into opening slot

NOTE • HINWEIS • REMARQUES • NOTA • お知らせ • 注釋 • 备注：

ICY DOCK will not be liable for any software, hardware, or data stored within or interfacing with ICY DOCK products which results in damage or malfunction. ICY DOCK will only be responsible for repairs and services of ICY DOCK products.

Für den Verlust von auf unseren Produkten oder mit Hilfe unserer Produkte gespeicherten Daten oder Schäden durch jegliche Software oder Hardware die mit unseren Produkten verbunden ist, ist ICY DOCK nicht verantwortlich. ICY DOCK übernimmt nur für die Reparatur von und Dienstleistungen für ICY DOCK Produkte Verantwortung.

La responsabilité de ICY DOCK ne pourra être engagée que pour le dysfonctionnement de ses propres produits. ICY DOCK ne assumera aucune responsabilité pour n'importe quel logiciel, matériel ou données stockées à l'intérieur de nos produits ICY DOCK ou que interagissent avec nos produits ICY DOCK.

本商品の誤った使用方法によって他の機器に故障などが発生した場合、弊社は本商品だけを修理する責任を負います。他の機器の損害に対しては一切の責任を負いません。

如因不當使用本產品進而造成其他相關設備之故障，本公司僅負擔自屬產品之修繕責任，造成其他設備毀損概不負責。如因不當使用本產品進而造成其他相關設備之故障，本公司僅負擔自屬產品之修繕責任，造成其他設備毀損概不負責。