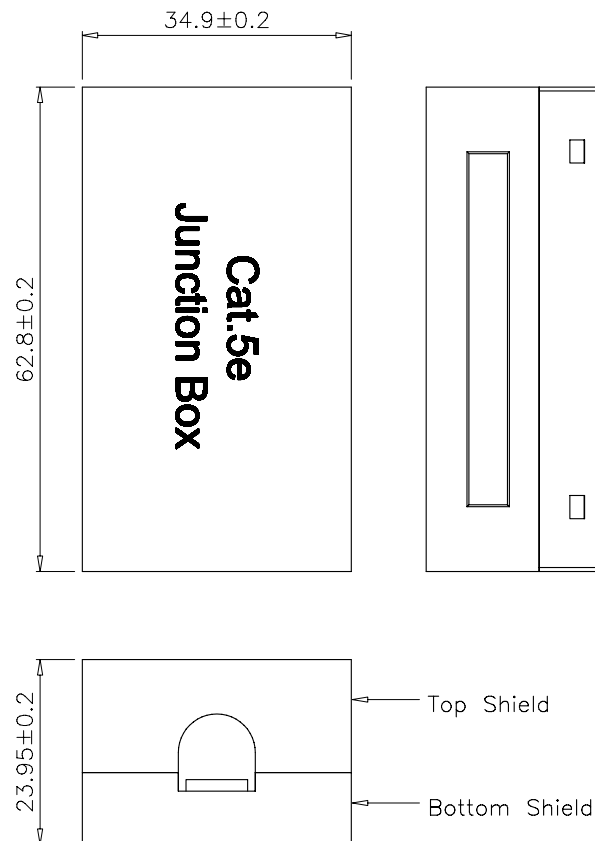
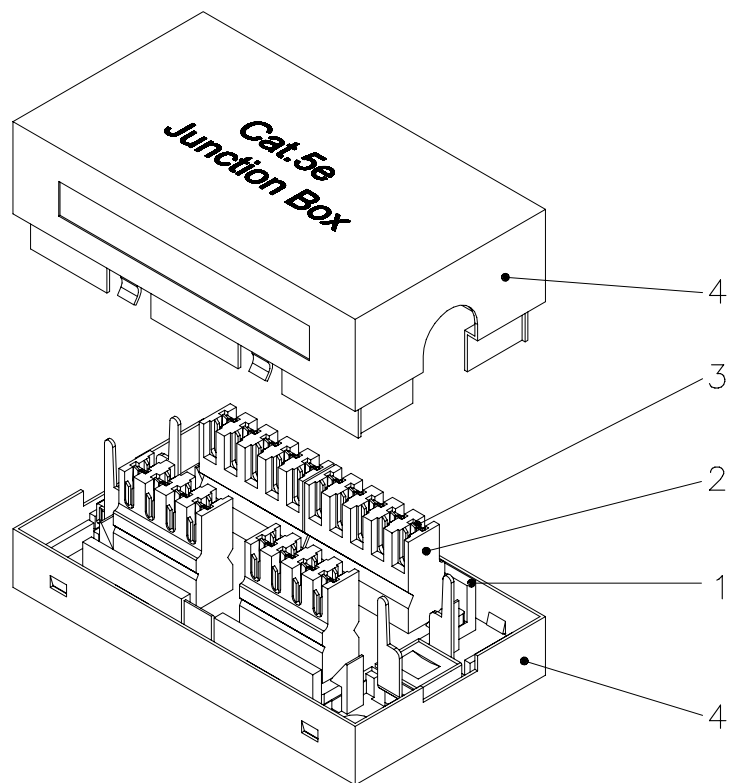


Specification:

Material :

1. Plastic : ABS UL 94V-0.
2. IDC Housing : PC, UL 94V-2.
3. IDC Terminal material & finished :
 - 3-1. Phosphor Bronze with 50 micro-inch Tin-Lead plated over 50-60 micro-inch Nickel plated.
 - 3-2. Use for 22-26 AWG solid and Stranded wires.
4. Shield Housing : Bronze with Nickel plated, shining Nickel color.

Performance :

- a. The IDC color codes combine two wirings of T568A & T568B.
- b. Operation Temperature : -40°C to 80°C .
- c. Durability :
 - IDC : Max. 200 punching times.
- d. The Cat.5e performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

GENERAL TOLERANCE OF DIMENSIONS

X.XXX	± 0.005
X.XX	± 0.05
X.X	± 0.1



Cat.5e junction box, fully shielded