


DATASHEET

Fiber pigtail SC 62,5/125μ 2m,

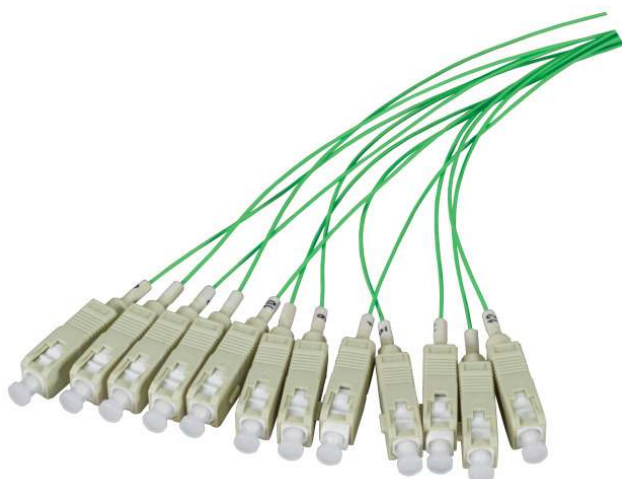

General data

The SC fiber pigtail has a primary coating (900μ) in the colour of the respective category (see table). The colour of the primary coating is equal to the colour of the secondary coating. A numeric connector coding 1 .. 12 simplifies the allocation of the ports. **The pigtails can be ordered separately.** Because the standard batch size for ordering pigtails is 12, in a polybag are 12 pigtails. Each connector is packed separately for an easy remove of each pigtail. Every PU contains an individual measuring protocol.

Allgemeine Daten

Core type	Semi tight
Outer Diameter	0.9 mm
Anti-kink sleeve	Put-on
Material outer sheath	LSZH
Type	Conductor pigtail

Mechanische Eigenschaften

Minimaler Biegeradius Dynamic	20xOD
Max. Tension	3 N
Mion. Bending Radius Static	10xOD

Abmessungen

Length	2.0 m
--------	-------

Umgebungsbedingungen

Operating Temperature	-20 – 70 °C
-----------------------	-------------

This datasheet was created automatically on 20-12-2022 . Technical changes reserved.



DATASHEET

Fiber pigtail SC 62,5/125μ 2m,


Normen, Zulassungen, Zertifizierungen

Connector Conform to Standard	IEC61754-4
Cable Conform to Standard	IEC60793-2

Available variants

ArtNr.	Bezeichnung	APC-version	Category	Colour	Fibre type	Quality class multimode	Type of connector	Einfügedämpfung 850nm	Steckerfarbe
03333.2	Fiber pigtail SC 62,5/125μ 2m,	False	OM1	blue	Multi mode 62.5/125	A/1 according to IEC-61753-222-2	SC	< 0,3 dB	beige

Drawings

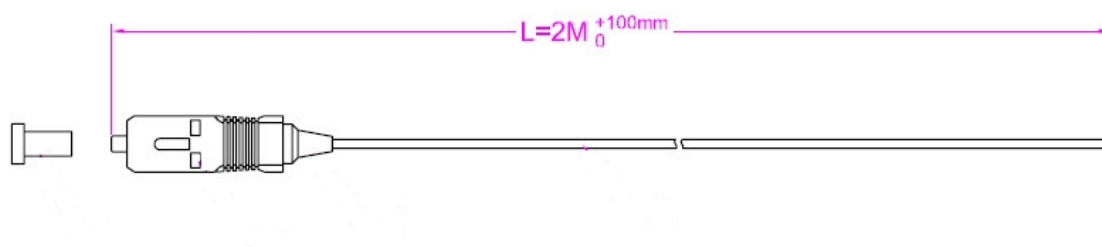

This datasheet was created automatically on 20-12-2022 . Technical changes reserved.

