


CUSTOMER NAME				DATE		REV	DESCRIPTION		BY
CUSTOMER Part No.		AK5012,AK5015		2014.02.20		A/0	NEW		Vinci
LENGTH									
CEE7/7									
IEC60320 C13									
YE/GN(stripe)									
BLUE									
BROWN									
YE/GN(stripe)									
BLUE									
BROWN									
WIRE MARKING									
JACKET									
CONDUCTOR									
INSULATION									
REMARKS:									
1.PLUG CEE7/7 RATED POWER:250V 16A									
2.CONNECTOR IEC60320 C13 RATED POWER:250V 10A									
3.WIRE: H05VV-F 3G0.75MM ² RATED VOLTAGE:300/500V									
4.DVW TEST:2000VAC,1S									
5.POLARIZATION AND CONTINUITY TEST									
ITEM NO.		COLOR	RAL NO.	LENGTH(M)					
AK5012		BLACK	RAL9011	1.5					
AK5015		BLACK	RAL9011	2.0					
WIRE MARKING: (Hollow) NO.129		+ 0 0 0 KEMA-KEUR 0VE S N D FI △ CEBEC 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM ² V-75 300/500V ORDINARY DUTY N SW17436							
Key Size	△	3RD							
Length (mm)	Tolerance								
	Critical	Normal	General						
0-15	±0.05	±0.10	±1.0	Part No.	AK5012,AK5015				
15-60	±0.10	±0.20		Description	CEE7/7+IEC60320 C13 H05VV-F 3G0.75MM ² BLACK(RAL9011)				
60-150	±0.15	±0.35	±1.5	UNIT	mm	APPROVAL	CHECKER	DRAWER	
150-350	±0.20	±0.50		PAGE	1/1				
350-1000	±0.40	±0.65	±2.0	Draw.No.				Vinci	

1	2	3	4	5	6	7	8	9	10
						DATE	REV	DESCRIPTION	BY
						2013. 4. 7	A/0	NEW	Lisa
						2013. 4. 12	A/1	增加品ITEM	Lisa

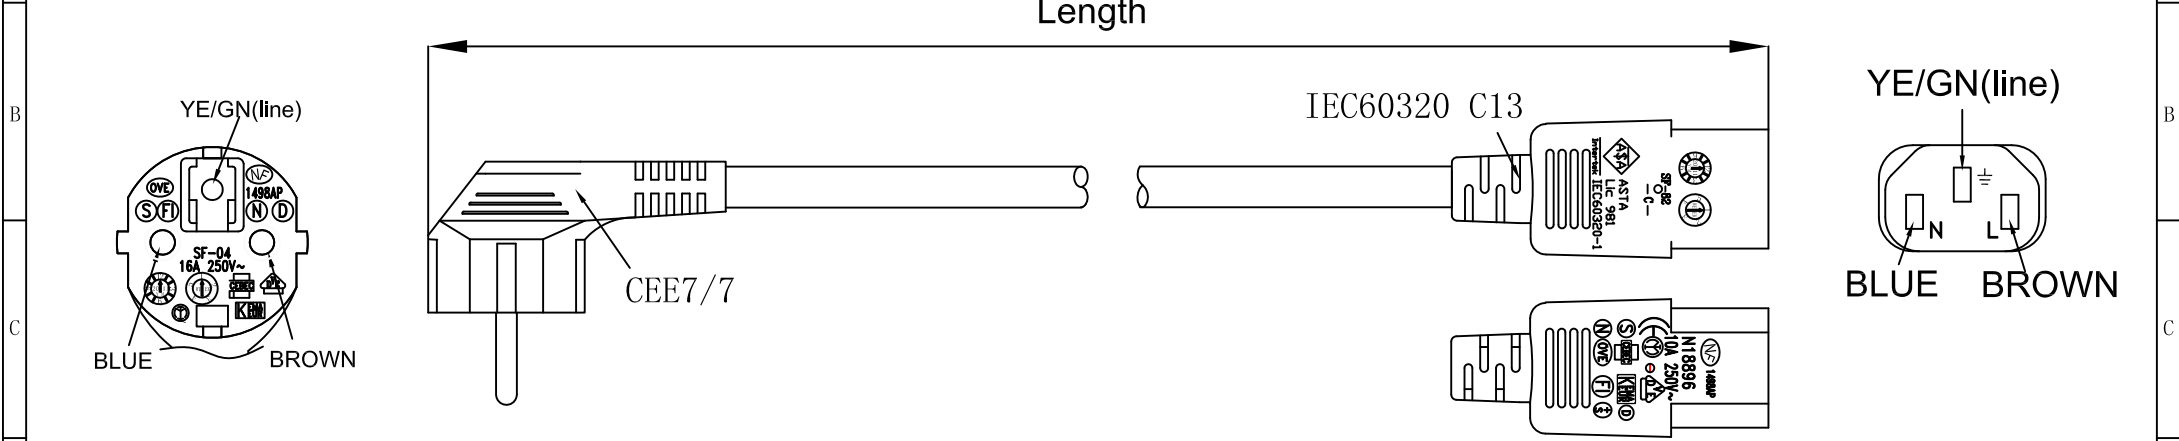

D		<table> <tr> <th>ITEM NO.</th><th>COLOR</th><th>RAL NO.</th><th>LENGTH(M)</th></tr> <tr> <td>AK5124</td><td>BLACK</td><td>RAL9011</td><td>3</td></tr> <tr> <td>AK5125</td><td>BLACK</td><td>RAL9011</td><td>4</td></tr> <tr> <td>AK5126</td><td>BLACK</td><td>RAL9011</td><td>7</td></tr> <tr> <td>AK5127</td><td>BLACK</td><td>RAL9011</td><td>10</td></tr> <tr> <td>AK5010</td><td>BLACK</td><td>RAL9011</td><td>2.5</td></tr> <tr> <td>AK5016</td><td>BLACK</td><td>RAL9011</td><td>5</td></tr> </table>	ITEM NO.	COLOR	RAL NO.	LENGTH(M)	AK5124	BLACK	RAL9011	3	AK5125	BLACK	RAL9011	4	AK5126	BLACK	RAL9011	7	AK5127	BLACK	RAL9011	10	AK5010	BLACK	RAL9011	2.5	AK5016	BLACK	RAL9011	5	D
ITEM NO.	COLOR	RAL NO.	LENGTH(M)																												
AK5124	BLACK	RAL9011	3																												
AK5125	BLACK	RAL9011	4																												
AK5126	BLACK	RAL9011	7																												
AK5127	BLACK	RAL9011	10																												
AK5010	BLACK	RAL9011	2.5																												
AK5016	BLACK	RAL9011	5																												
E			E																												

REMARKS:

1.PLUG(SF-04) RATED POWER:250V 10/16A

2.CONNECTOR(SF-82) RATED POWER:250V 10A

3.WIRE: H05VV-F 3G1.0MM² RATED VOLTAGE:300/500V

4.DVW TEST:2000VAC,1S

5.POLARIZATION AND CONTINUITY TEST