

Product Highlights

True Gigabit Speed

Enjoy lightning-fast Gigabit speeds without the need for installing a new network card simply by using any available USB Type-C port on your device

Full Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution for stunning videos and images with no lag

Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer files up to 10 times faster than with USB 2.0

Dual-Slot SD Card Reader

Dual-slot SD card reader is compatible with both SD and microSD cards



DUB-M810

8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power Delivery

Features

Gigabit Ethernet Connectivity

- Achieve transfer speeds of up to 1 Gbps
- Status LEDs for connection status and data transfer speed
- Auto 10/100/1000 Mbps speed detection to always use the highest available speed

High Fidelity Video Compatibility

- Ultra HD video resolution up to 4K @ 30 Hz
- Supports HDMI 1.4 and DisplayPort Alternate Mode over USB-C
- HDCP 2.2 compatible

SD Card Compatibility


- SD card & microSD card
- SD, SDHC, SDXC (UHS-I mode)

Versatile and Convenient

- Three USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 Type-C port with data sync and power delivery of up to 100 W (20 V @ 5 A)
- One USB 3.0 port supports Quick Charge BC1.2
- Simply plug-and-play, no software required

The DUB-M810 8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power Delivery allows you to instantly add a second display, a SD card reader, a Gigabit Ethernet port, three additional USB 3.0 ports, with one that can fast-charge, as well as a USB Type-C port with charging ability to your ultra-portable computer. Just plug the DUB-M810 into an available USB Type-C port and you're ready to send content to your TV or monitor in full resolution with the reliability of a wired video connection. You can also connect up to 3 more USB devices, as well as insert a microSD or regular SD card, giving you direct access to your full resolution photos stored on memory cards from your cameras. You can also sync and charge one USB Type-C device, meaning that you don't have to give up that USB Type-C port this hub is connected to.

Hardware Overview

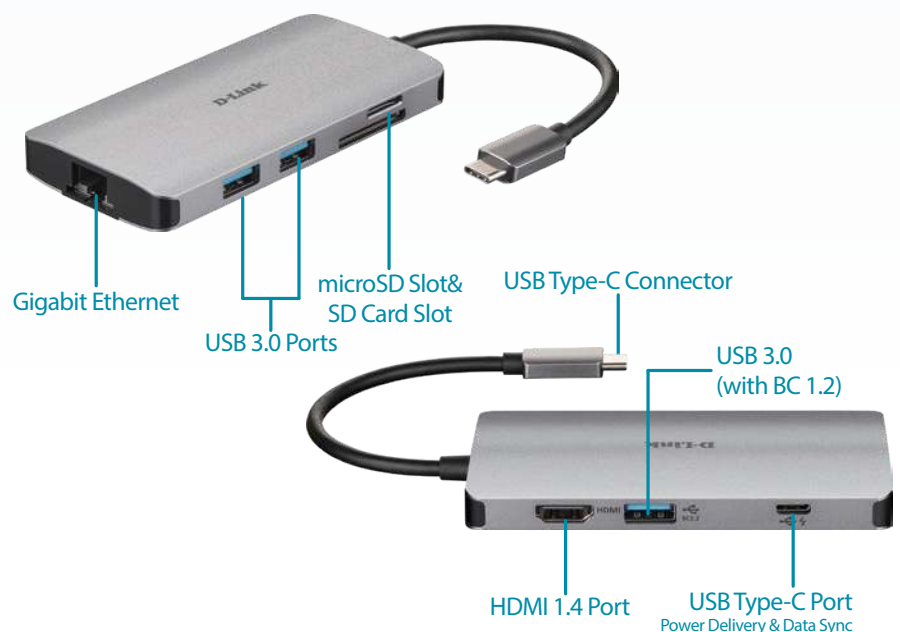

8-in-1 USB-C Hub with HDMI/Ethernet/Card Reader/Power Delivery

Technical Specifications

Connectivity

Device Interfaces	- HDMI port (3840 x 2160 or 4096 x 2160 pixels @ 30 Hz) - microSD and SD card slots - Three USB 3.0 Type-A ports (One port support BC1.2) - RJ-45 Gigabit Ethernet port (10/100/1000 Mbps)	- One USB 3.0 Type-C port with data sync and power delivery of up to 100 W (20 V @ 5 A) - USB Type-C connector (Thunderbolt 3 compliant)
Standards	- USB Specification Version 3.0 - USB Specification Version 2.0 - USB Specification Version 1.1 - Quick Charge BC 1.2 - SD, SDHC, SDXC (UHS-I mode) - HDMI 1.4 - HDCP 2.2	- DisplayPort Alternate Mode - OHCI (Open Host Controller Interface) - EHCI (Enhanced Host Controller Interface) - IEEE 802.3 Ethernet - IEEE 802.3u Fast Ethernet - IEEE 802.3ab Gigabit Ethernet - IEEE 802.3x flow control

General

Minimum System Requirements	Computer running Microsoft Windows, Mac OS, or Chrome OS	A USB Type-C port with DisplayPort Alternate Mode support
-----------------------------	--	---

Physical

Dimensions (W x H x D)	105 x 52 x 13 mm	Cable length: 15 cm
Weight	82.0 g	
Power	Input: Bus-powered	Consumption: 80 mA, 5 V DC
Temperature	Operating: 0 to 45 °C (32 to 113 °F)	Storage: -10 to 70 °C (14 to 158 °F)
Humidity	Operating: 10% to 85% RH, non-condensing	Storage: 5% to 90% RH, non-condensing
Certifications	- CE - IC	- FCC - RCM



For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., First Floor, Artemis Building, Odyssey Business Park, West End Road, South Ruislip HA4 6QE, United Kingdom. Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2019 D-Link Corporation. All rights reserved. E&OE.

Updated September 2019

D-Link®