

order number: J08071A0021

LC/APC Duplex adaptor, Singlemode, cramic sleeve, plastic housing, snap-in or screw mounting

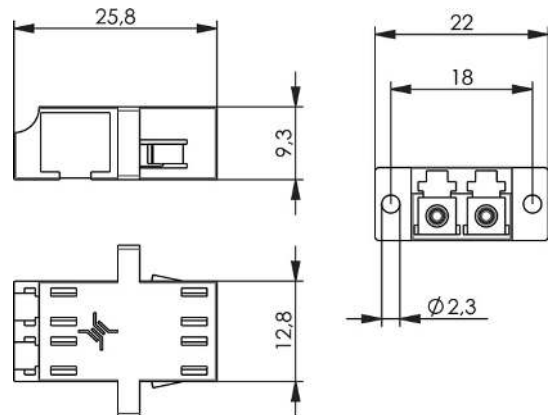
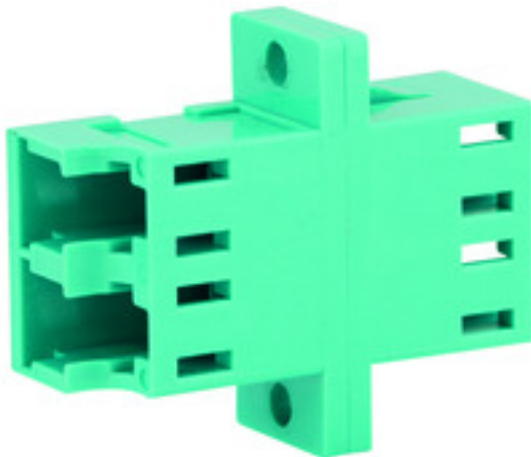


Fig. may differ

Technical Attributes	
Description	LC/APC Duplex adaptor, singlemode, ceramic sleeve, plastic housing
Installation	Snap-in or screw mounting
Mount. dim.	Z77
Housing Colour	green

Description of the Series/Product Category

Notice: The following information refer to the series/product category as a whole. Please see the specific datasheet for specific technical information of a particular product.

Durable, precise and reliable: Telegärtner fiber optic connectors with ferrule and coupling sleeve made of zirconia ceramics exceed the specifications of the relevant international standards. The APC types (Angled Physical Contact) with 8° angled polished ferrules offer return loss values of more than 60 dB and meet highest expectations.

Performance Characteristics

- Available for Singlemode and Multimode
- For 0.9 mm fibers and 3.2 mm cordage

- Multimode 50 µ, 62,5 µ, 200 µ and 980 µ
- Singlemode 9 µ

Mechanical Characteristics	
Colour: connector housing / adaptor housing	Multimode: beige, blau, türkis, schwarz, violett; Singlemode: blau; Singlemode APC: grün
	connector type LC acc. to IEC 61754-20
Durability (Steckungen)	≥ 1000
strain relief	≥ 100 N
Material: connector ferrule	Zirkonia ceramic
Material: adaptor split sleeve	Zirkonia ceramic
Material: plug housing, boot, dust caps	brass, 5 µm Ni plated
Material: adaptor housing	brass, 5 µm Ni plated

Climatic Characteristics	
Operating temperature in °C	-20 / 80
Storage temperature in °C	-40° to 90° C

Insertion loss: plug (factory assembly)	Multimode: max. 0.4 dB ¹ ; Singlemode/Singlemode APC: max. 0.5 dB ¹
Return loss: plug (factory assembly)	Multimode: min. 30 dB ² ; Singlemode: min. 40 dB ² ; Singlemode APC: min. 60 dB ²