



24 ports Cat.6 Unshielded Patch Panel

135426

The equip[®] Patch Panel is a 19" 1U network distribution unit integrating cable management system for better routing and strain relief requirements, suitable for both LSA and 110 standards. Featuring 24 x RJ45 ports, this patch panel is recommended to connect with equip[®] patch cords and cabling accessories to achieve outstanding performance. Moreover, each port is marked with port number for recognition.

| Specification

Category	Cat.6
Ports	24
Shielding	Unshielded
Size	19", 1U

| Key Features

- IDC color T568A/T568B coded
- Compliant with ANSI/TIA/EIA 568 standard
- 24 x Un-Shielded RJ45 ports





| Ordering Information

PN	EAN	Color
135426	4015867223079	Black

| Package Contents

- Cat.6, 24 Ports Unshielded Patch Panel

Packing: equip White box

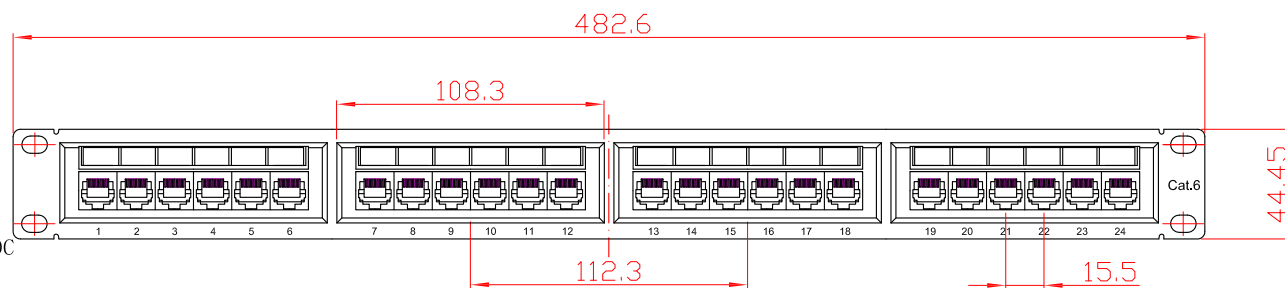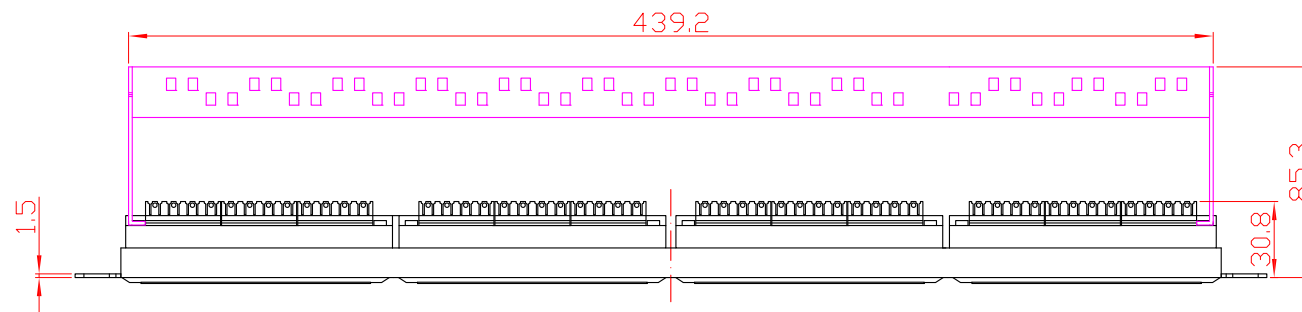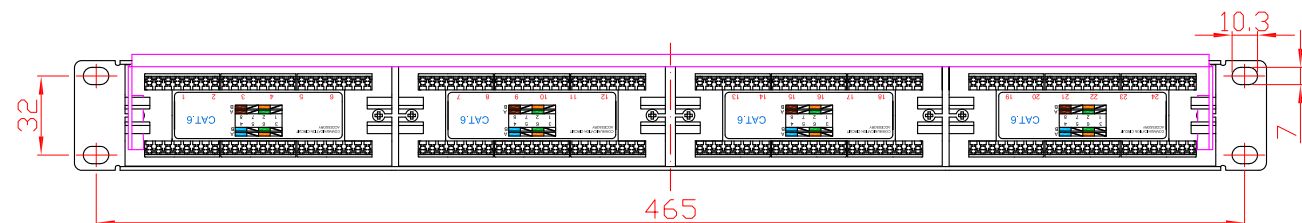

NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:ABS;
2. PANEL FRAME:CARBON STEEL, POWDER, COATING IN BLACK COLOR, Spcc1.5mm;
3. PCB MATERIAL:FR-4 T=1.6mm;
4. IDC MATERIAL:PC ,CONTACT:PHOSPHOR BRONZE; WITH NICKEL PATING;
5. RJ45 JACK LIFE:750 TIMES MIN;
6. IDC LIFE:200 TIMES MIN;
7. WIRE:AWG 22-26;

											
SYM	Number	Bill No. of Alteration	Signature	Date	Material				Item No.	135426	
					Angles Projection	Size	Scale	Unit	DWG No.		
Drawn	Ding jian bo	2016.1.12	Tolerance			A4	X:1	mm	Part Name	24Ports Cat6 UTP Patch Panel With Back Bar	
Checked	Ge pei jun	2016.1.12	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00-Angle ±0.25 ±30°						ERP		
Approved	Wang wei jun	2016.1.12			Sheet	1 OF 1	Version: A/0	Part No.			

24Ports Cat6 UTP Patch Panel With Back Bar