

EX-K1680 - EX-K1683

USB 3.0 Glas Faser Kabel

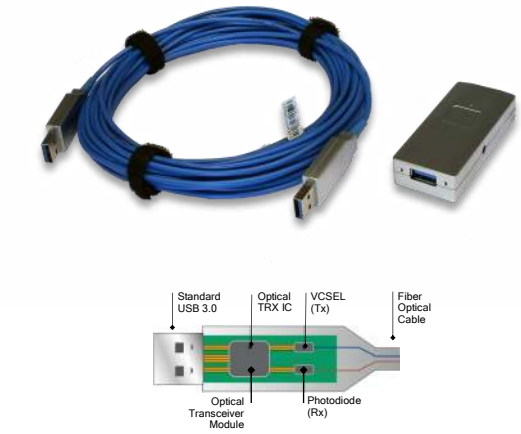

Anwendungen / Application

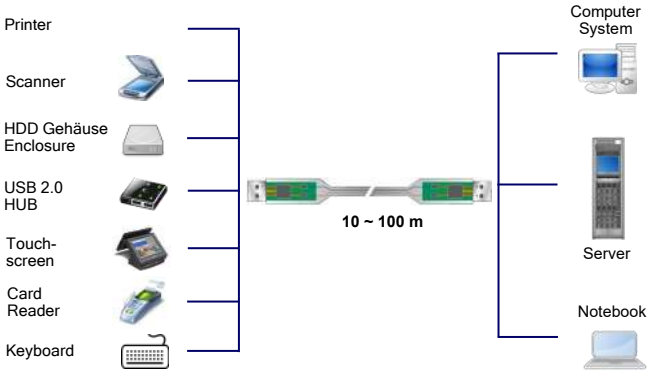

USB 3.0 Glasfaser Kabel (AOC) 10 bis 100 Meter

Beschreibung

Das USB 3.0 Glasfaserkabel (AOC Aktives Optisches Kabel) wurde entwickelt, damit es mit den elektrischen Spezifikationen vom Superspeed USB kompatibel ist. Es überträgt die Daten gegenüber dem Kupferkabel verlustfrei und über längere Distanzen. Es ist sehr leicht, flexible und eignet sich perfekt zum Verlegen.

Merkmale

- Verlängern der USB 3.0 Peripheriegeräte bis zu 100 Meter mit Glasfaser Kabel
- Wandelt das USB-Datensignal in ein Optisches Signal um
- Kompatibel mit USB Super Speed Spezifikationen
- Unterstützt 850nm VCSEL (Multi-Mode MM)
- Weniger EMI (Electromagnetische Störausstrahlung) und RFI (Radio Frequenz Störausstralung)
- Metallgehäuse für eine bessere EMI-Leistung
- Tiefer Strom verbrauch / Plug and Play
- 3.0 mm Durchmesser des Glasfaser Kabel
- Artikel Nummer zum Bestellen: 10 Meter = EX-K1680 / 20 Meter = EX-K1681
50 Meter = EX-K1682 / 100 Meter = EX-K1683

Spezifikationen

- **Datentransfer-Rate:** bis 5Gbps
- **Anschlüsse**: 2 x USB A-Stecker
- **Hardwaresysteme:** USB 3.0
- **Treiber:** Win XP/ 200x/ Vista/ 7/ 8.x/ 10 (32&64)
WinCE/ Server 2012R2/ Linux/ Mac OS 10.8 oder höher
- **Betriebstemperatur :** 0°C bis 55° Celsius
- **Lagertemperatur:** -40°C bis 75° Celsius
- **Rel. Luftfeuchtigkeit:** 5% bis 95%
- **Gewicht**: von 300g bis 1Kg
- **Lieferumfang**: USB 3.0 AOC Glasfaser Kabel

USB 3.0 Active Optical Cable (AOC) 10 to 100 meter

Description

The USB 3.0 Active Optical Cable was designed to be fully compliant with SuperSpeed USB electrical specifications. There transmit the data over the opposite the copper cable lossless and over longer distances. It is very light, flexible and perfect for installation.

Features

- Extend USB3.0 devices up to 100 meter over fiber optics
- Convert USB electrical data signal to a optical signal
- Compliant with Super Speed USB specifications
- Support 850nm VCSL (Multi-Mode MM)
- Less EMI (Electromagnetic Interference) and RFI (Radio Frequency Interference)
- Metal housing for superior EMI performance
- Low power consumption
- Plug and Play
- 3.0mm diameter Fiber cable
- Product number for order: 10 meter = EX-K1680 / 20 meter = EX-K1681
50 meter = EX-K1682 / 100 meter = EX-K1683

Specification

- **Data transfer rate:** up to 5Gbps
- **Connectors**: 2 x A-male connector
- **Hardware system:** USB 3.0
- **Driver:** Win XP/ 200x/ Vista/ 7/ 8.x/ 10 (32&64
Server 2012R2/ Linux/ Mac OS 10.8 or higher
- **Operating Temperature :** 32°F up to 131°F Fahrenheit
- **Storage Temperature:** -40°F up to 167° Fahrenheit
- **Rel. Humidity:** 5% to 95%
- **Weight**: from 300g to 1Kg
- **Packaging contents**: USB 3.0 AOC fiber optical

System / OS

Windows, Mac OS X

Geprüft / Approved

CE FC RoHS

Verpackung / Packaging