FEELWORLD®

F5 PRO V4

Touch Screen

Custom 3D LUT

6" ON-CAMERA MONITOR

Sony F970 External Install and Power Kit
Designed to simplify and improve video creation




1920x1080 FHD Resolution | Touch Screen | Custom 3D LUT | 4K HDMI In & Out | 5V Type-C Power Supply | Power for Camera | External Install and Power Design



FEATURES

- 6-inch 1920x1080 full HD IPS screen
- Touch screen and intuitive button operation, meet different needs.
- Supports 3D LUT Log to REC.709 and user 3D LUT upload (up to 32)
- Sony F970 external install and power kit design can be used to install and supply power to external equipment, easy to install and disassemble, simplify your photography equipment.
- With Waveform, Vectorscope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Multiple power supply modes, DC IN 12V, Type-C 5V and NP-F battery slot
- Stereo Earphone output
- DC 8.4V power out to power your DSLR camera or mirrorless camera

USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD

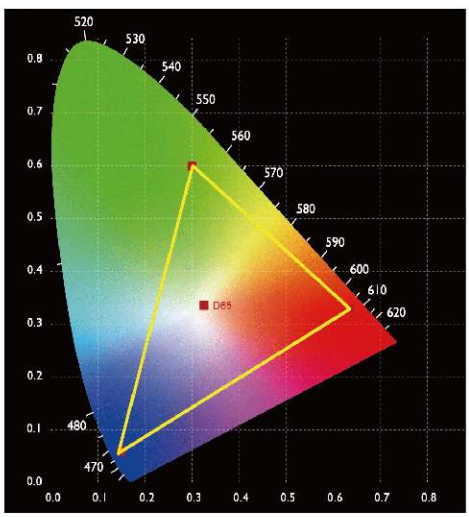


PROFESSIONAL AND RICH AUXILIARY FUNCTIONS

3D LUT | Waveform | Vector Scope | Histogram | Anamorphic Mode | Peaking Filter

False Colors | Exposure | Zoom-in | Image Flip | Embedded Audio | Nine Grid

MULTIPLE POWER SUPPLY MODE

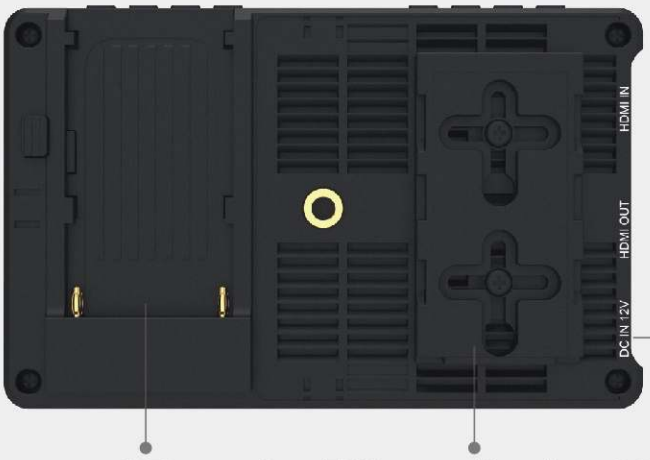

F970 Sony F970 external install DC IN 12V




Type-C 5V/Upgrade/LUT file importing




PARAMETER

Description	6" FHD HDMI Touch Screen On-camera 3D LUT Monitor with F970 Install and Power Kit
Model	F5 Pro V4
Screen size	6" IPS
Display Colors	16.7M (8 bit)
Resolution	1920x1080 pixels
Dot pitch	0.069 (H) × 0.069 (W) mm
Aspect Ratio	16:9
Brightness	450cd/m2
Contrast	1000:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI
Output	HDMI
Audio	3.5mm Stereo Headphone
Power In	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner), DC IN 5V (Type-C)
Power Out	DC OUT 8.4V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
HDMI Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
	4K UHD 3840×2160p (30/29.97/25/24/23.98Hz), 4096×2160p (24Hz)
Power Consumption	≤8W
Input Voltage	DC7～24V
Power Connector	DC
Battery Plate	F970 Battery Plate
Operating Temperature	-20°C ～ 50°C
Storage Temperature	-30°C ～ 60°C
Install Way	¼-20 thread points (top, bottom, right, middle back)
Unit Size	148Lx93Hx21.75D (mm)
Unit Weight	245g (with F970 install and power kit)

STRUCTURE

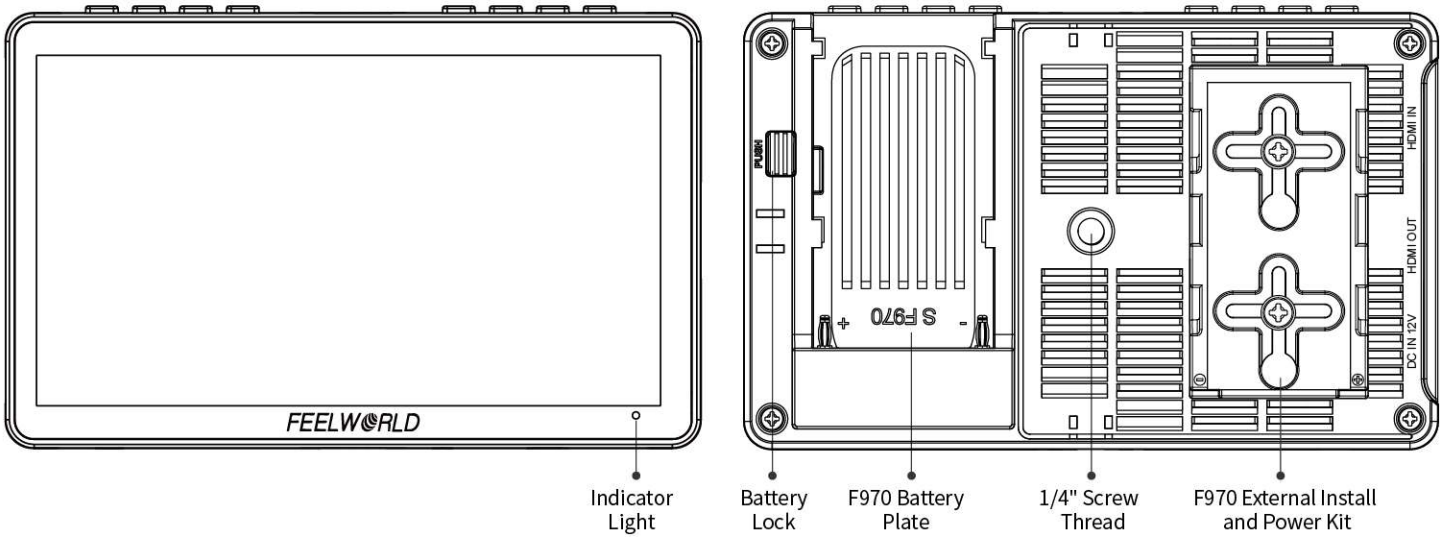

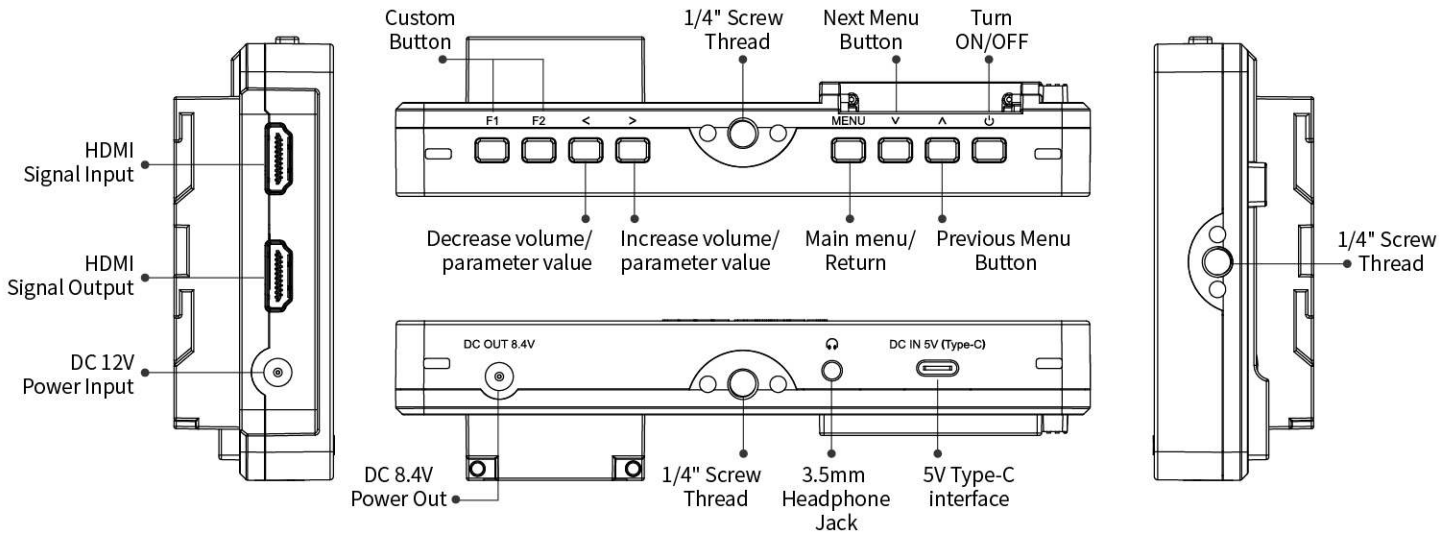

PACKING LIST

 Monitor	 Micro HDMI Cable	 Tilt Arm	 Sunshade
 Type-C to USB	 Disassemble Wrench	 User manual	

Zhangzhou Seetec Optoelectronics Technology Co., Ltd
E-mail: sales@feelworld.cn Tel: +86-596-2672627 Website: www.feelworld.com.cn
Fax: +86-596-2672617 www.seetec.com.cn