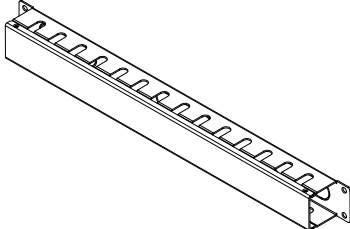



Easy Rack 1U Horizontal Cable Manager ER7HCM


Kit Instructions

The 1U Horizontal Cable Manager is installed in a 1U space in the Easy Rack.

ER7HCM Inventory	Tools required (not provided)
 1U Horizontal Cable Manager (1)	 Torx® wrench
 M6 x 12 Pan Head T30 Screw (4)	 Cage nut tool
 Cage Nut M6 14/16 SWG (4)	

Proper location in the rack for the cage nuts:

1. Locate the top and bottom U space on the vertical mounting rails. Every third hole on the mounting rails is numbered to indicate the middle of a U space.
2. Install the cage nuts on the interior of the vertical mounting rail; then install the shelf.

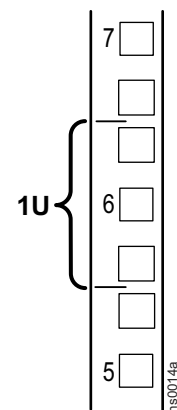


⚠ CAUTION**FALLING EQUIPMENT HAZARD**


Do NOT install cage nuts vertically with the tabs engaging the top and bottom of the square hole.

Failure to follow these instructions can result in injury or equipment damage.

- Install cage nuts horizontally, with the tabs engaging the sides of the square hole.
- Install the cage nuts on the interior of the vertical mounting rail.

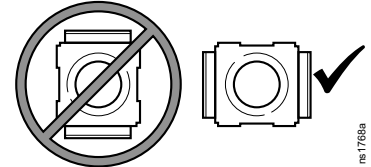**Install the cage nut:**

1. From the inside of the rack, insert the cage nut into the square hole.
2. Hook one tab of the cage nut assembly through the far side of the hole.
3. Place the cage nut tool on the other side of the cage nut and pull to snap into position.

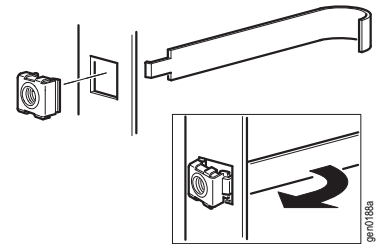**Remove the cage nut:**

1. Remove any attached screw.
2. Grasp the cage nut, squeeze the tabs on the sides, and push to release it from the square hole.

Install the Horizontal Cable Manager:

Using the hardware provided, install the four (4) cage nuts in the vertical mounting rails of your Easy Rack.

Use the four (4) M6 x 12 Pan head T30 screws to secure the Horizontal Cable Manager to the cage nuts.

