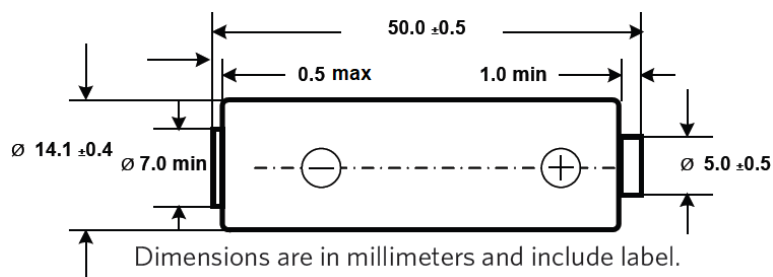
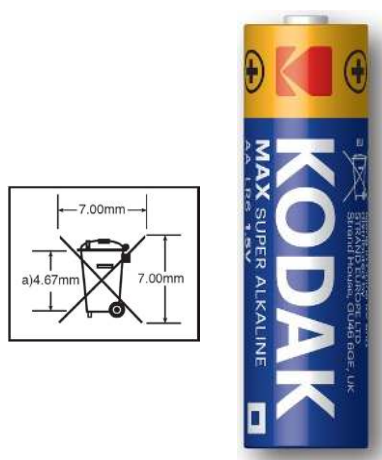


KODAK MAX Super Alkaline Battery KAA

Effective: 25/03/2019

**Chemical system:**Alkaline, MnO_2 / KOH / Zn **Designations:**

IEC LR6, ANSI 15A

Nominal Voltage:

1.5V

Nominal Capacity:

2800 mAh at 75 Ohms to 0.8 Volts

Internal Impedance:

0.15 Ohms (typically)

Average Weight:

23 g

Average Volume:8.0 cm^3 **Recommended storage temperature:**

10 – 25 °C

Operating temperatures:

-20 – 54 °C

Reaction: $2 \text{MnO}_2 + \text{Zn} + \text{H}_2\text{O} \rightarrow 2 \text{MnOOH} + \text{ZnO}$ **Terminals:**

Flat contacts, protruding negative

Jacket:

Aluminium label

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead / 99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.
- 6) SDS sheets are available on request from Strand Europe Ltd.