DIGITUS 10 Gigabit Media Converter

DN-82211
EAN 4016032441175



10 Gigabit Ethernet Media Converter, SFP supports 1G, 2.5G, 5G and 10G, open slot

The media converters from DIGITUS® are the ideal solution for the migration of copper and fiber network signals. From now on, you are able to access the fiber technology and transfer network signals over several kilometers without renewing your whole network infrastructure. The huge variety of products fulfil your individual needs. The intiutive operation guarantees a quick and easy installation. Years of experience and a wide range of products lets DIGITUS® become a reliable partner for your network.

The perfect converter solution for optical data transmission

- 1 x RJ45/1 x SFP
- Supports 1000 Base-T to 1000 Base-X, 2.5G Base-T to 2.5G Base-X, 5G Base-T to 5G Base-R and 10G Base-T to 10G Base-R
- Distance up to 80km
- Converts wire-based network signals into fiber optic signals
- Supports back pressure and bandwidth control in each port
- Store and forward technology for optimized data transfer
- Auto MDI/MDI-X function
- Diagnostic LEDs for status and activity monitoring
- Operating temperature: 0 to 55°C
- Standalone converter with external power supply unit
- Connector 1: RJ45
- Connector 2: SFP
- Mode: Depending on module
- Distance (km): Depending on module
- Industrial usage: no
- Broadcasting Mode: Unidirectional
- PoE injector: yes
- Ethernet speed: 10 Gigabit

Package contents


- 10 Gigabit Media Converter
- Quick start guide
- Power adapter

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	8.00	40.00	26.00	34.00	35,360.00
Packaging Unit Inside	1	0.40	24.00	13.00	6.00	1,872.00
Packaging Unit Single	1	0.40	24.00	13.00	6.00	1,872.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:


DC5V-12V


PWR
10G
Link ACT
Link
SD
ACT
TX
RX
UTP

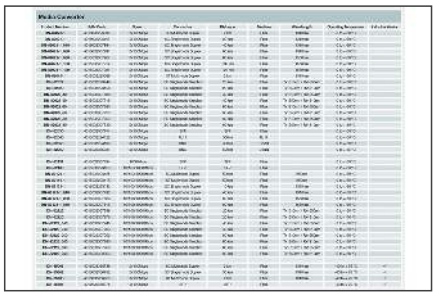




Media Converter
DC 5V
This device complies with Part 15 of the FCC rules.


Media Converter