

COMPACT splicing connectors for all wire types; 3-conductor terminal block; with operating levers; Max. operating temperature 85°C

Item No.: 221-413



COMPACT splicing connectors for all wire types; 3-conductor terminal block; with operating levers; Max. operating temperature 85°C

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	221-413
GTIN / EAN	4050821808442
Content	1
Order amount	50
Customer item number	

Notes

Technical data

Miscellaneous

Total number of connection points	3
Total number of potentials	1
Color	transparent
Ratings according to 1	EN 60664
Rated voltage (II / 2) [V]	450 [V]
Rated surge voltage (II / 2) [kV]	4 [kV]
Nominal current [A]	32 [A]
Connection technology	CAGE CLAMP®


Technical data	
Number of connection points	3
Actuation type	Push-in
Connectable conductor materials	Kupfer
Nominal cross section	4 mm ²
Solid sizes	0.2 ... 4 mm ² / 24 ... 12 AWG
stranded, connectable	0.2 ... 4 mm ² / 24 ... 12 AWG
Fine-stranded wires	0.14 ... 4 mm ² / 24 ... 12 AWG
Strip length	11 mm / 0.43 in
Type of wiring	Side-entry wiring
Flammability rating per UL 94	V2
Weight [g]	2.527 [g]
Width	18.7 mm / 0.736 in
Height	8.3 mm / 0.327 in
Length	18.6 mm / 0.732 in
Safety information 1	In grounded power lines

Printview: COMPACT splicing connectors for all wire types; 3-conductor terminal block; with operating levers; Max. operating temperature 85°C - Item No.: 221-413

Images & drawings





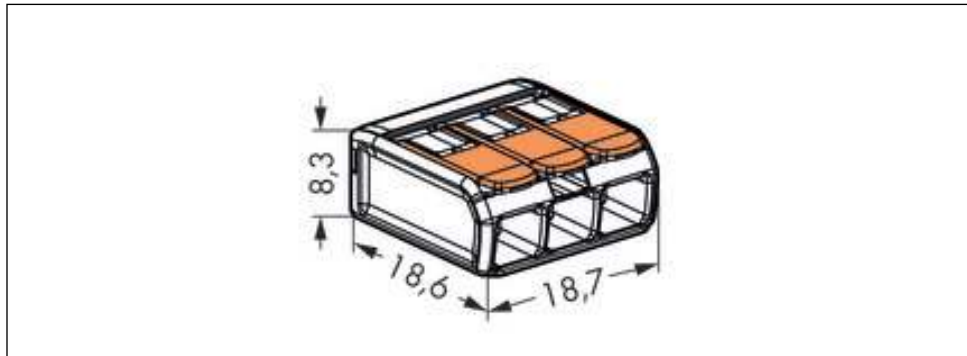

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.