


# LAVALIER II™

PREMIUM LAVALIER MICROPHONE



3.5MM TRS  
CONNECTION




PROFESSIONAL  
QUALITY




The Lavalier II is a premium lavalier microphone that is ideal for the most demanding audio and video applications. It features a unique low-profile design with a flat capsule that is incredibly discreet. The included mounting clip is also extremely compact, making the Lavalier II much easier to conceal than standard lavaliers. It has a very flat frequency response that flatters all voice types, with an omnidirectional polar pattern that picks up crystal-clear, detailed audio from all directions. The Lavalier II also comes with a premium accessory kit featuring a high-quality pop filter and mini furry windshield, coloured identification rings, and a handy zip case.


- Premium lavalier microphone with unique low-profile design
- Compact mounting clip
- Omnidirectional polar pattern
- Delivers broadcast-grade audio with flat frequency response
- 3.5mm TRS locking connector
- Includes pop filter, mini furry windshield, mic clip, set of coloured ID rings and zip case

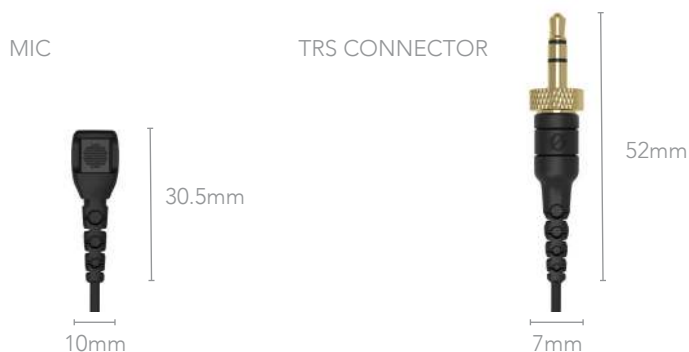

## POLAR PATTERN



## FREQUENCY RESPONSE

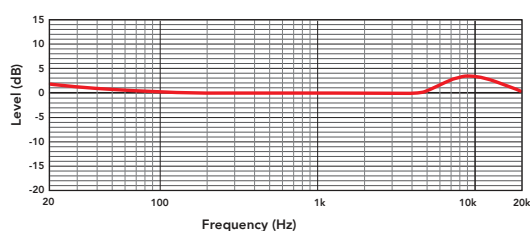

## ACOUSTIC & ELECTRICAL SPECIFICATIONS

|                               |                                                                                   |
|-------------------------------|-----------------------------------------------------------------------------------|
| Acoustic Principle:           | Permanently polarised                                                             |
| Active Electronics:           | JFET impedance converter                                                          |
| Capsule:                      | 6mm                                                                               |
| Polar Pattern:                | Omnidirectional                                                                   |
| Frequency Range:              | 20Hz – 20KHz                                                                      |
| Output Impedance:             | 2K2Ω                                                                              |
| Signal to Noise Ratio:        | 67 dB                                                                             |
| Equivalent Noise (A-weighted) | 27dBA Typical                                                                     |
| Maximum SPL:                  | 106 dB SPL RMS (Plug-In Power, 1% THD)<br>120 dB SPL RMS (Plug-In Power, 10% THD) |
| Maximum Output Level:         | 50mV (@ 1kHz, 1% THD into 1KΩ load)                                               |
| Sensitivity:                  | -38 dB re 1 Volt/Pascal (12.59 mV @ 94 dB SPL) +/- 3 dB @ 1kHz                    |
| Dynamic Range:                | 79 dB Typical                                                                     |
| Power Requirements:           | 1.8v to 5v Plugin Power                                                           |

## MECHANICAL SPECIFICATIONS

|                           |                                                                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Weight (grams):           | Body: 9<br>Clip: 2                                                                                                                       |
| Dimensions: (millimetres) | Body: L 1200, W 10, H 5<br>Clip: L 21, W 20, H 8                                                                                         |
| Compatible RØDE Products: | <ul style="list-style-type: none"> <li>• Wireless GO</li> <li>• Wireless GO II</li> <li>• AI-Micro</li> <li>• RØDELink Series</li> </ul> |
| Included Accessories:     | 1 x Lavalier II<br>1 x Pop Filter<br>1 x Mic Clip<br>1 x Mini Furry Windshield<br>1 x Set of Coloured ID Rings<br>1 x Zip Case           |