FEELWORLD®

LUT5 3000nit TOUCH·3D LUT

5.5" DAYLIGHT VIEWABLE FIELD MONITOR

Sony F970 External Install and Power Kit




- 5.5" — 3000nit Light Sensor
- 1920x1200 — FHD Resolution
- Touch Screen
- 3D LUT — Custom 3D LUT
- HDR — HDR Monitoring
- 4K HDMI — 4K HDMI In & Out
- External Install and Power Design
- DC OUT — Power for Camera



FEATURES

- 5.5-inch 1920x1080 full HD IPS screen
- Touch screen menu operation, improve shooting efficiency
- Ultra-bright 3000nit, clearly visible in the sun
- Light sensor auto dimming
- Supports 3D LUT Log to REC.709 and user 3D LUT upload
- Supports HDR monitoring, what you see is what you get
- Sony F970 external install and power kit design can be used to install and supply power to external equipment, easy to install and disassemble, simplify your photography equipment.
- With Waveform, Vectorscope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Stereo Earphone output
- DC 8V power out to power your DSLR camera or mirrorless camera

USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD

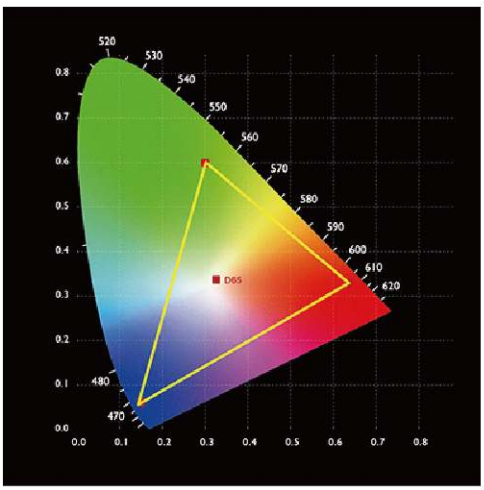

PROFESSIONAL AND RICH AUXILIARY FUNCTIONS

- 3D LUT
- Waveform
- Vector Scope
- Histogram
- Anamorphic Mode
- Peaking Filter
- False Colors
- Exposure
- Zoom-in
- Image Flip
- Embedded Audio
- Nine Grid

SD card slot import LUT




Flexible power supply mode
Sony F970 external power and install kit




PARAMETER

Model	LUT5
Screen size	5.5" IPS
Display Colors	16.7M (8 bit)
Resolution	1920x1080 pixels
Dot pitch	0.069(L) x 0.069(W) (mm)
Aspect Ratio	16:9
Brightness	3000cd/m2
Contrast	1000:1
Backlight	LED
Response Time	Ton+Toff=35ms
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI
Output	HDMI
Power Out	DC OUT 8V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
Audio	3.5mm Stereo Headphone
HDMI Input/ Output Support Format	480i/576i/480p/576p
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	3840×2160p (30/29.97/25/24/23.98)
	4096×2160p (30/29.97/25/24/23.98)
Power Consumption	⩽ 20W
Input Voltage	DC7 ~24V
Power Connector	DC
Battery Plate	F970 Battery Plate
Operating Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Install Way	1/4"-20 Thread Point (Right, Bottom)
Unit Size	142Lx86Hx28D (mm)
Unit Weight	270g

STRUCTURE

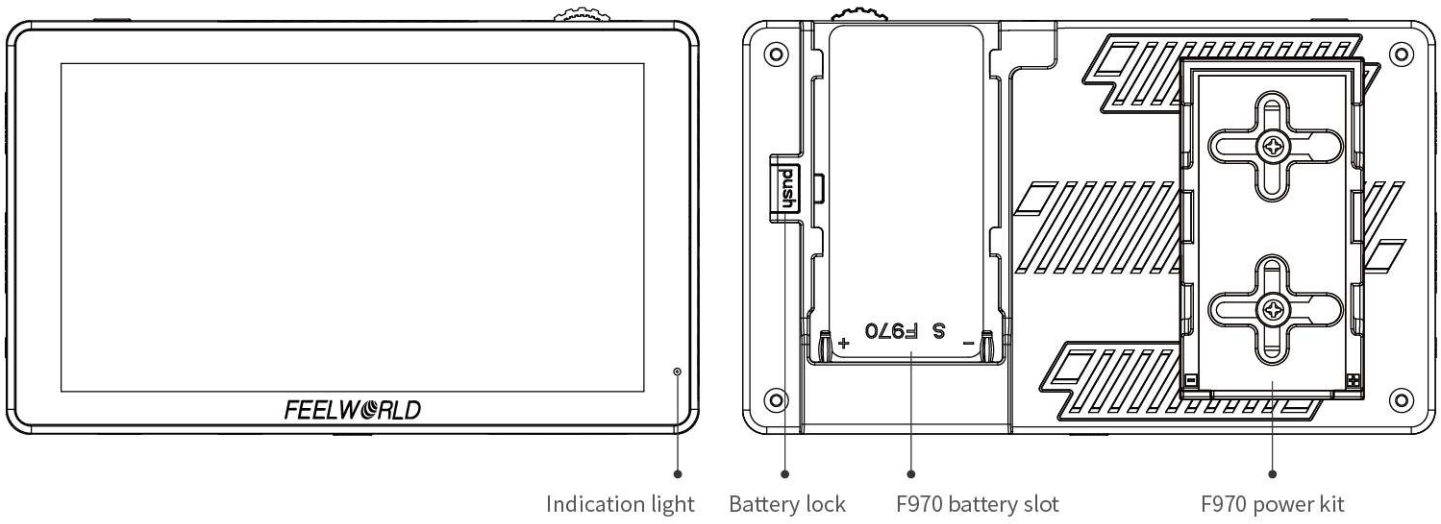

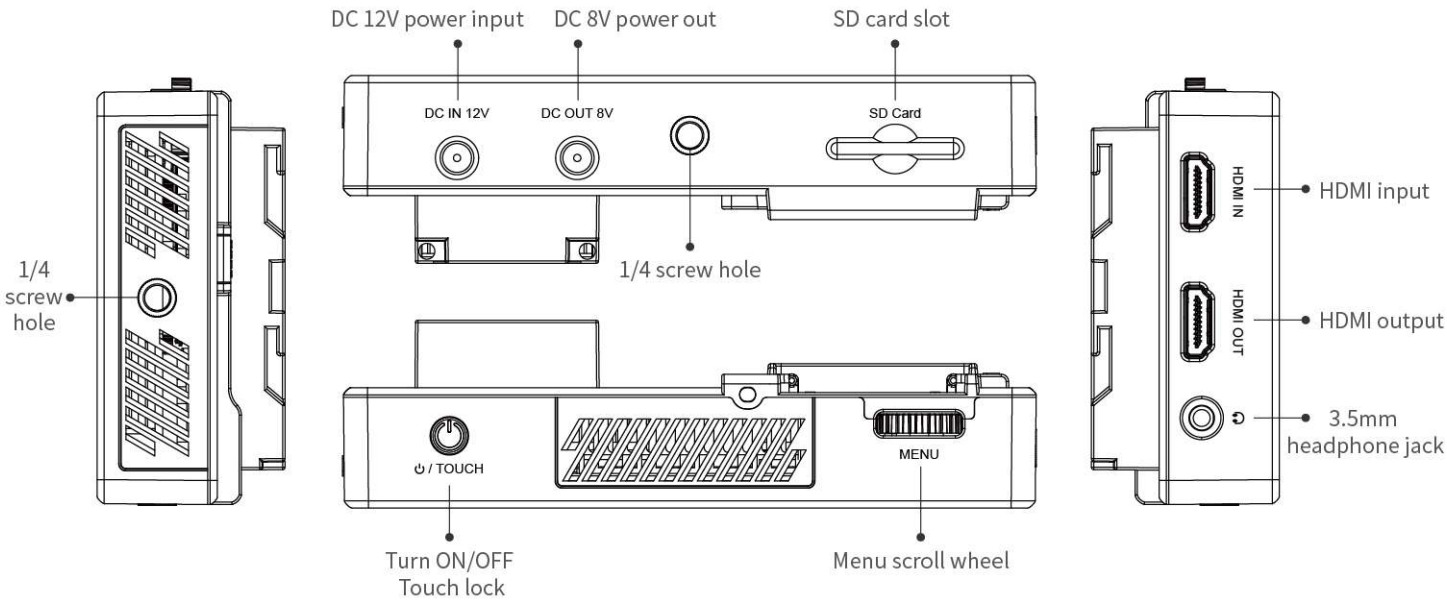

PACKING LIST

			
Monitor	Micro HDMI cable	Mini hot shoe mount + Hex wrench	User manual

Zhangzhou Seetec Optoelectronics Technology Co., Ltd
E-mail: sales@feelworld.cn Tel: +86-596-2672627 Website: www.feelworld.com.cn
Fax: +86-596-2672617 www.seetec.com.cn