


ALTHEA11W 2-Port 33W USB PD Charger, USB-C x 1, USB-A x 1, QC 3.0, PPS, PD 3.0

Product Images

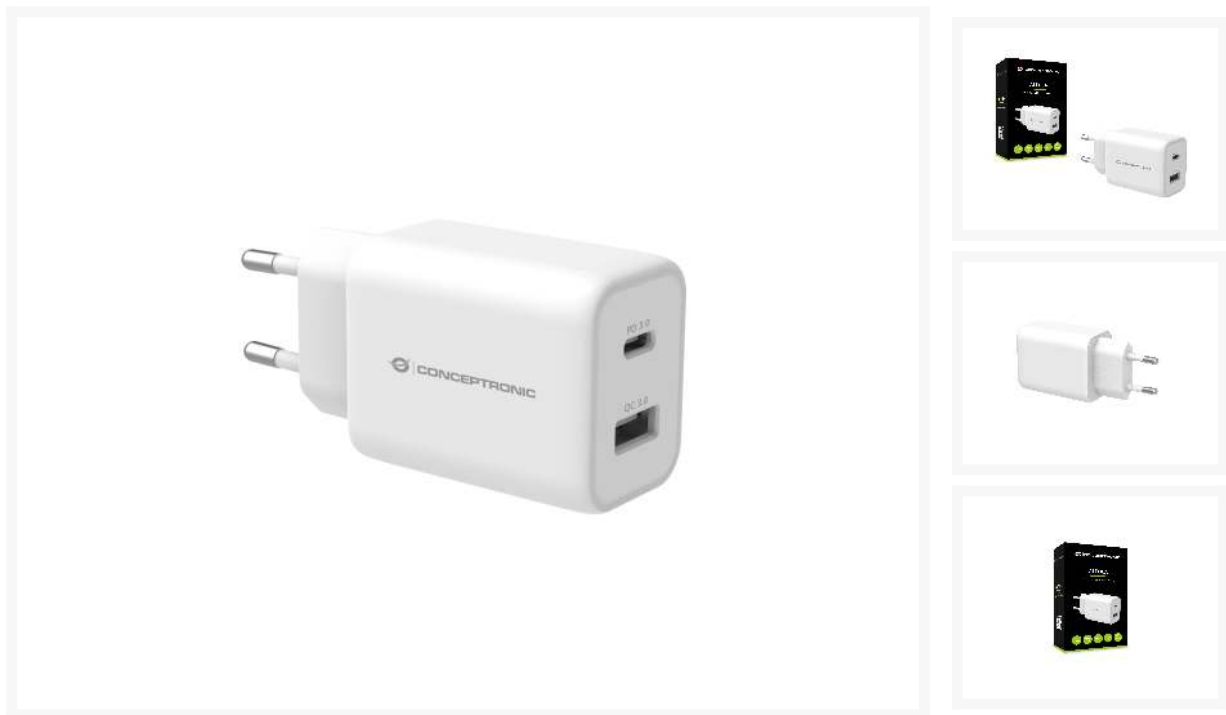

Short Description

- **Versatile Port Selection:** Equipped with 2 ports including 1 USB-C ports (with PD 3.0) and 1 USB-A ports (with QC 3.0), providing up to 33W and allowing simultaneous charging for multiple devices with varying power requirements.
- **Wide Compatibility:** Supports a range of output options from 3.3V to 20.0V across its ports, ensuring compatibility with devices from smartphones to laptops.
- **Enhanced Safety Features:** Built-in protections against overload, short circuiting, and overheating, ensuring the safety of both the charger and connected devices.
- **Efficiency and Fast Charging Technology:** Incorporates USB Power Delivery (PD) 3.0 and Quick Charge (QC) 3.0 technologies for rapid charging, along with Programmable Power Supply (PPS) compliance to maximize charging efficiency and minimize heat generation.

Description

This charger features a versatile port selection with 2 ports, including 1 USB-C port with Power Delivery (PD) 3.0 and 1 USB-A port with Quick Charge (QC) 3.0, providing up to 33W of power and allowing simultaneous charging for multiple devices with varying power requirements. It supports a range of output options from 3.3V to 20.0V across its ports, ensuring compatibility with devices from smartphones to laptops. Enhanced safety features include built-in protections against overload, short-circuiting, and overheating, ensuring the safety of both the charger and connected devices. Incorporating USB Power Delivery (PD) 3.0 and Quick Charge (QC) 3.0 technologies for rapid charging, along with Programmable Power Supply (PPS) compliance, this charger maximizes charging efficiency and minimizes heat generation.

Additional Information

Number of outputs	2
USB Type-A ports quantity	1
Fast charging technology	Quick Charge 3.0, Power Delivery 3.0, Programmable Power Supply (PPS)
USB Type-C ports quantity	1
Programmable power supply (PPS) (YES/NO)	Yes
Housing Material	Polycarbonate (PC)
Number of simultaneously connected devices (max)	2
Port 1 Power Output	USB-C output: DC 3.3-11V/3A, 3.3-16V/2A (PPS); 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A (PD)
Port 2 Power Output	USB-A output: DC 5V/3A, 9V/3A, 12V/2.5A, 20V/1.5A (QC 3.0)
Power Plug Type	EU
Package Depth	71 millimeter
Package Height	117 millimeter
Package Width	32 millimeter
Package Weight	10 gram
Harmonized System (HS) code	850440
Package Content	Quick installation guide
USB Power Delivery revision	3.0
Operating temperature (T-T) Max	40 celsius
Operating temperature (T-T) Min	0 celsius
Storage relative humidity (H-H) Max	90%
Storage relative humidity (H-H) Min	10%
Operating relative humidity (H-H) Max	80%
Operating relative humidity (H-H) Min	20%

Storage temperature (T-T) Max	80 celsius
Storage temperature (T-T) Min	-20 celsius
Color	White
EAN	4015867227527
Model Number	ALTHEA11W
Maximum AC Input	240 volt
Minimum AC Input	100 volt
Input current	1 ampere
Maximum power	33 watt
Icecat_Power protection features	Over current, Over power, Short circuit
Product Height	30 millimeter
Product Width	40.2 millimeter
Product Depth	65.7 millimeter
Product Weight	66.5 gram

