


Bild / Picture

Anwendung / Application



incl. EX-47991

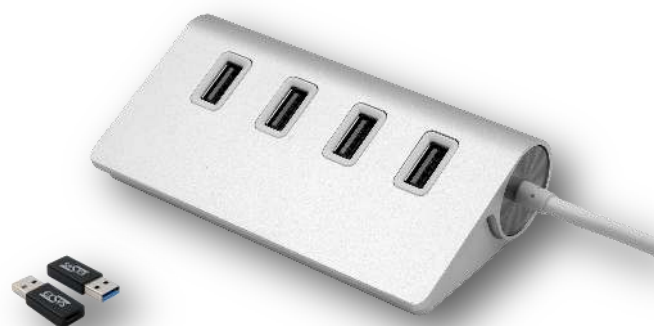


4-Port USB 3.2 Gen 1 HUB in einem elegantem Metall-Gehäuse

Beschreibung

Mit der EX-1134-2 erweitern Sie einen USB 3.2 Gen 1 Ausgang von Notebook oder Desktop Rechner auf vier weitere USB 3.2 Gen 1 Ports. Es ist dann möglich bis zu vier externe USB 2.0 oder 3.2 Gen 1 Peripheriegeräte an einen USB 2.0 oder 3.2 Gen 1 Port von Notebooks oder Desktop Rechner anzuschließen. Er ist sehr kompakt und elegant und alle vier USB Ports sind immer erreichbar. Mit der EX-1134-2 wird noch ein Adapter von C-Buchse auf A-Stecker (EX-47991) mitgeliefert. Damit kann er auch an einen Rechner mit A-Buchse angeschlossen werden. Das USB 3.2 Gen 1 Kabel ist 30cm lang. Der EX-1134-2 unterstützt ohne Netzteil keine größeren externen Peripheriegeräte wie zum Beispiel eine externe Festplatten. Das Netzteil (EX-6993) ist optional erhältlich.

Merkmale

• USB 3.2 Gen 1 Metall HUB mit vier Downstream Ports	
• Anschlüsse für bis zu vier USB Peripheriegeräte	
• Konform mit USB 3.2 Gen 1 Spezifikation 1.0	
• Unterstützt alle USB 2.0 bis 3.2 Gen 1 Kompatible Peripheriegeräte	
• Automatische Erkennung der Datentransfer-Rate für die angeschlossenen Peripheriegeräte	
• Stromversorgung (Bus-Power) oder mit Netzteil 5V/1A (Optional)	
• Inklusive Adapter A-Stecker zu C-Buchse (EX-47991)	

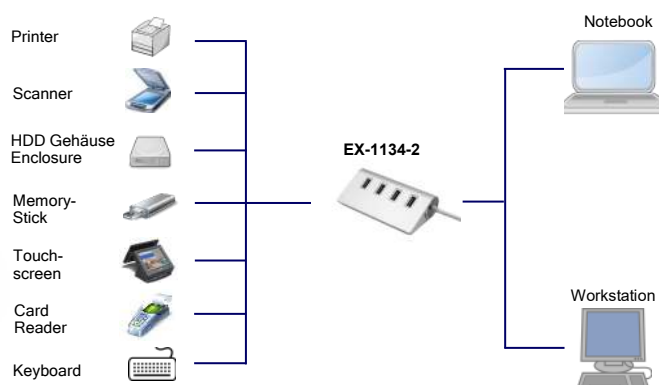

4-Port USB 3.2 Gen 1 HUB in an elegant metal case

Description

With the EX-1134-2 you can expand one USB 3.2 Gen 1 output of notebook or desktop computer to four additional USB 3.2 Gen 1 ports. It is then possible to connect up to four external USB 2.0 or 3.2 Gen 1 peripherals to one USB 2.0 or 3.2 Gen 1 port of notebooks or desktop computers. It is very compact and elegant and all your USB ports are always accessible. The EX-1134-2 also comes with an adapter from C female to A male (EX-47991) so it can also be connected to a computer with a USB A female connector. The USB 3.2 Gen 1 cable is 30cm long. The EX-1134-2 does not support larger external peripherals such as an external hard drive without the power supply. The power supply (EX-6993) is optionally available.

Features

• USB 3.2 Gen 1 metal HUB with four downstream ports	
• Connects up to four USB peripheral devices	
• Compliant with USB 3.2 Gen 1 specification 1.0	
• Support all USB 2.0 to 3.2 Gen 1 compatible devices	
• Automatic recognition the data transfer rate for the attached external peripheral devices	
• Power (Bus-Power) or with power supply 5V/1A (optional)	
• Included adapter A-male to C-female (EX-47991)	

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Datentransfer-Rate:	120Mbps bis 5Gbps	Data transfer rate:	120Mbps up to 5Gbps
Anschlüsse:	1 x USB 3.2 Gen 1 C-Stecker Upstream 4 x USB 3.2 Gen 1 A-Buchse Downstream 1 x 5V DC-Jack	Connectors:	1 x USB 3.2 Gen 1 C-male Upstream 4 x USB 3.2 Gen 1 A-female Downstream 1 x 5V DC jack
Hardwaresysteme:	USB 2.0 bis 3.2 Gen 1	Hardware system:	USB 2.0 to 3.2 Gen 1
Treiber:	Benötigt keine Treiber (Standard HUB)	Driver:	No driver necessary (Standard HUB)
Betriebssysteme:	Win Vista / 7 / 8.x / 10 / 11 (32&64-Bit)/ Server(200x & 2012 R2), Mac OS 10.x	Operating systems:	Win Vista / 7 / 8.x / 10 / 11 (32&64-Bit)/ Server(200x & 2012 R2), Mac OS 10.x
Betriebstemperatur :	0°C bis +55°C Celsius	Operating temperature :	32°F up to 131°F Fahrenheit
Lagertemperatur:	-20°C bis +85°C Celsius	Storage temperature:	-20°F up to 167°F Fahrenheit
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	USB Bus-Power	Current Supply:	USB bus power
Abmessung:	99.00 x 55.00 x 27.00 mm	Size:	99.00 x 55.00 x 27.00 mm
Gewicht:	150 g	Weight:	150 g
EAN:	4718359113451	EAN:	4718359113451
Ursprungsland:	China	Country of origin:	China
Lieferumfang:	EX-1134-2, Adapter EX-47991, Handbuch	Packaging contents:	EX-1134-2, Adapter EX-47991, Manual

Bilder / Pictures

