




FCS-3403 GEMINI Fixed Dome IP Camera, 4-MP, H.265

Product Images



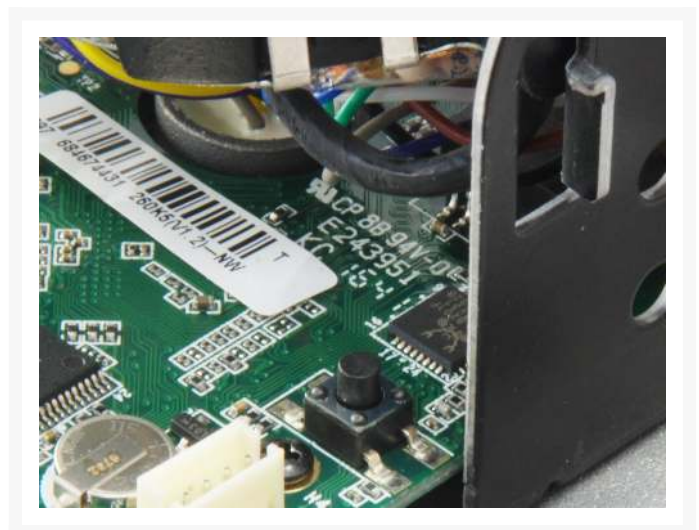

Short Description

1. Features WDR (Wide Dynamic Range) to enhance visibility under extremely bright or dark environments
2. Free CMS (Central Management System) software with 64-channel license
3. Built-in Micro SD/SDHC/SDXC card slot for local storage
4. Built-in infrared LEDs for night viewing up to 30m
5. 4-Megapixel high-definition resolution
6. Video compression: H.264, H.265, MJPEG
7. Weatherproof IP66-rated housing

Description

The LevelOne FCS-3403 is a fixed-position outdoor camera offering an ultra-reliable, cost-effective solution for outdoor IP surveillance networks, and is rated at IP67 to operate within rain, extreme heat, snow, dust and humid conditions. Offering clear, sharp imagery with 4-Megapixel resolution and the versatility of 802.3af standard PoE to transfer power and data via a single Cat.5 cable, the LevelOne FCS-3402 Should be an essential part of any security deployment that requires smart, reliable outdoor cameras.

Additional Information

Approval and compliance	CE,FCC,TVS 2000V Lightning Protection, Surge Protection and Voltage Transient Protection,IP67,IK10,RoHS
Max. operating temperature (°C)	60
Max. storage temperature (°C)	95
Min. operating temperature (°C)	-30
Supported browsers	IE 9.0 or newer, Firefox with VLC, Chrome with VLC, Safari with QuickTime
Angle of view (°)	Horizontal field of view: 86 Vertical field of view: 46 ¹ Diagonal field of view: 102 ¹
Audio format	G722.1/G711ulaw/G711alaw/G726/MP2L2/PCM
Image sensor	1/2.7" Progressive Scan CMOS
Indicators	Power
IR cut filter	Yes
IR range	Up to 30 meter
Lens	Lens Mount:M12 4 mm @F2.0
Resolution	Main Stream: 50Hz: 25fps (1920 * 1080, 1280 * 960, 1280 * 720) 60Hz: 30fps (1920 * 1080, 1280 * 960, 1280 * 720) Sub Stream: 50Hz: 25fps (640 * 480, 640 * 360, 320 * 240) 60Hz: 30fps (640 * 480, 640 * 360, 320 * 240) Third Stream: 50Hz: 25fps (1920 * 1080, 1280 * 720, 640 * 360, 352 * 288) 60Hz: 30fps (1920 * 1080, 1280 * 720, 640 * 360, 352 * 240)
Shutter time	1/3 s to 1/100,000 s
Storage capacity	Built-in MicroSD/SDHC/SDXC slot, up to 128G
Standards	IPv4/v6, TCP/IP, UDP, RTP, RTSP, HTTP, HTTPS, ICMP, FTP, SMTP, DHCP, PPPoE, UPnP, IGMP,SNMP, QoS
Video format	Main stream: H.265/H.264 Sub stream: H.265/H.264 /MJPEG Third stream: H.265/H.264
Features	One-key reset, anti-flicker, three streams, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
Product weight (kg)	0,5

Product breadth (mm)	111
Product depth (mm)	111
Product height (mm)	82
Color	White
EAN	4015867207703
Model number	FCS-3403
Package contents	FCS-3403 Screw Kit Quick Installation Guide Resource CD (User Manual, Utility, QIG)
Camera Type	Dome
Resistance	Weatherproof
Zoom Type	Fixed
2-way Audio	Yes
IR Leds for night vision	Yes
PoE Supported	Yes
Max. Resolution	4 Megapixels
IP Camera series	GEMINI
Power Consumption	12 VDC, 0.7 A, max. 8.5W, ? 5.5mm coaxial plug power PoE (802.3af, 36V to 57V), 0.3 A to 0.1 A, max. 10W

