SPECIFICATION SHEET



DisplayPort Dongle Adapters

- Adapts a DisplayPort Source device to VGA, DVI or HDMI compatible displays
- Supports DisplayPort 1.2 specification
- Supports up to a 1080p resolution (HDMI model)
- Supports up to a 1920x1200 resolution (DVI & VGA models)
- Lifetime Warranty

Road 30 Hortonwood Industrial Estate | Telford, Shropshire TF1 7AB UK | www.c2g.com | UK Phone 0800 328 2916 | EMEA Phone +44 (0)1952 677300

© 2013 Lastar Inc.

Specifications: DisplayPort Dongle Adapters

Electrical Characteristics:

Voltage Rating:	30v
Conductor Resistance:	@ 20°C max
Insulation Resistance:	10MΩ/km
Time Delay:	5.2ns/m (max)
Attenuation:	

5.02dB@100-450MHz	7.69dB@1GHz
12.595dB@2GHz	17.495dB@3GHz
22.395dB@4GHz	27.295dB@5GHz
32.195dB@6GHz	37.095dB@7GHz

Physical Characteristics:

Operating Temperature:	0°C to 50°C
Storage Temperature:	-25°C to 70°C
Approvals:	CE
Warranty:	Lifetime

Conductor (2 Conductors, 5 Pair):

Conductor:	30AWG (7/0.1TC)
Insulation:	FM-PE, ID:0.8±0.05mm
Color:	White/Brown, White/Red, White/Orange, White/Green White/Blue
Drain:	30AWG (7/0.1TC) HD-PE ID:0.56±0.05
Shield:	AL-Mylar Wrap Coverage—100%


Conductor (5 Conductors):

Conductor:	30AWG (7/0.1TC)
Insulation:	HD-PE, ID:0.56±0.05mm
Color:	Red/Orange/Yellow/Green/ White

Overall Cable

Jacket:	PVC
Shield:	AL-Mylar—Coverage 100% Braid—16/9/0.12
Drain:	2:30AWG (7/0.10 BC)
OD:	6.5±0.2

Specifications: DisplayPort Dongle Adapters

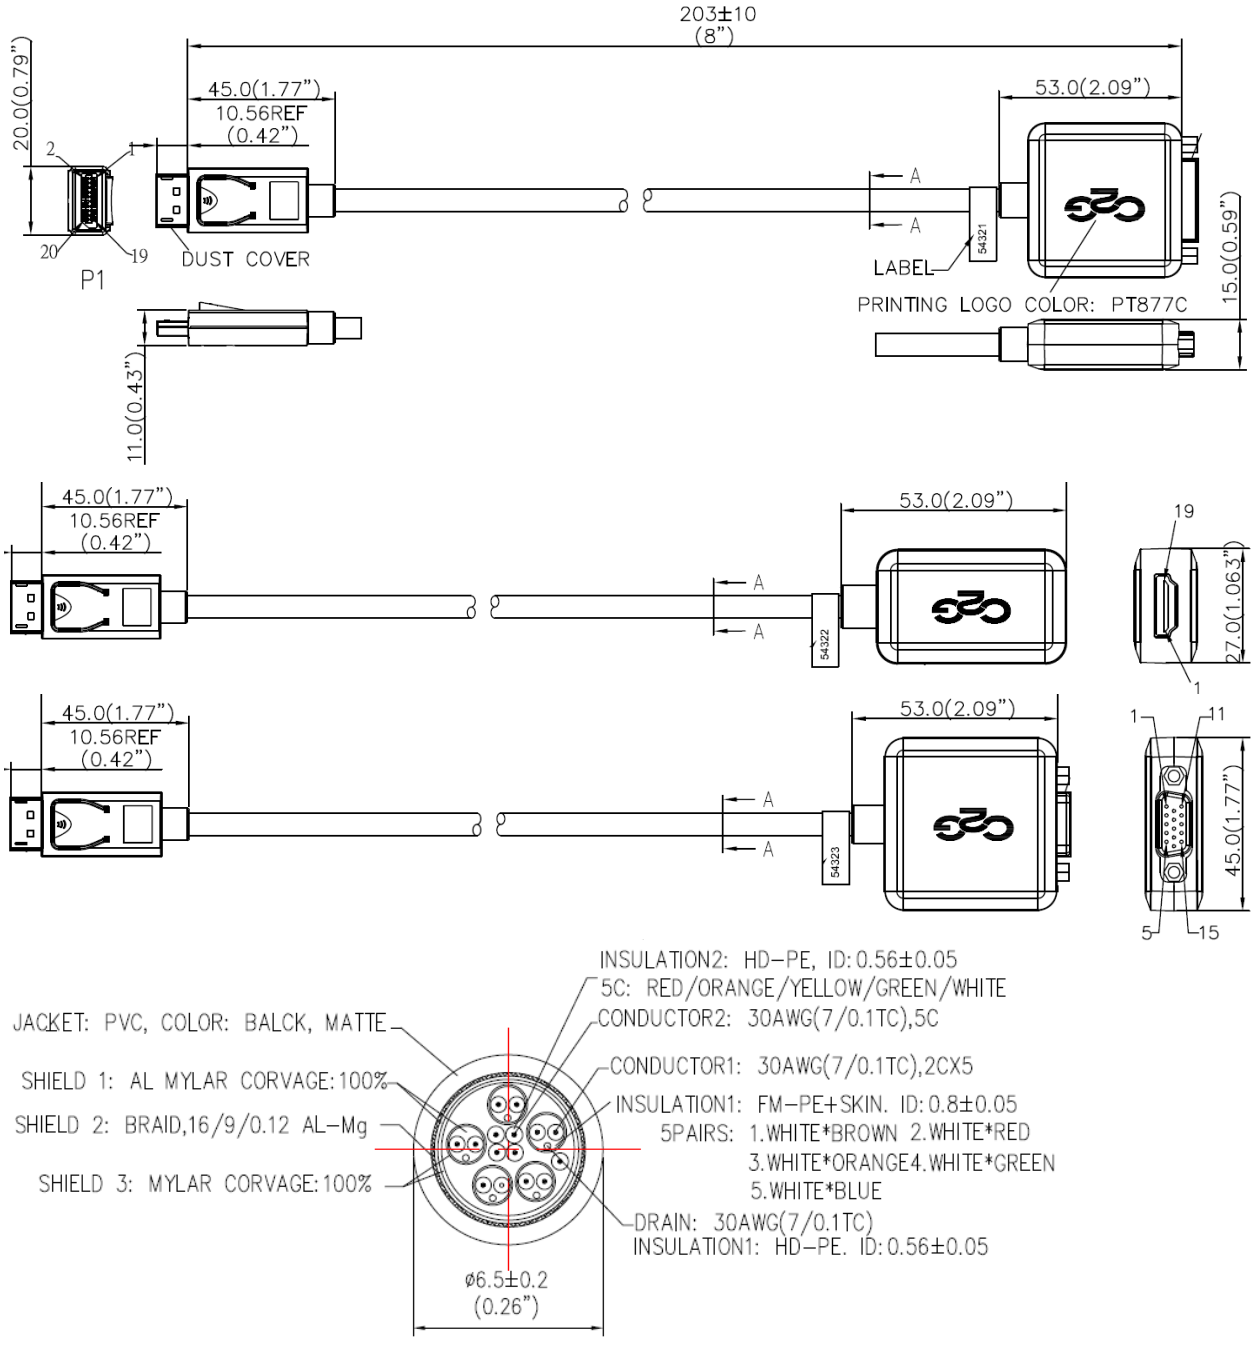

Part Number	Description	Weight (Kg)
84321	20cm DisplayPort to Single Link DVI-D Female Adapter Converter—Black	
84322	20cm DisplayPort Male to HDMI Female Adapter Converter—Black	
84323	20cm DisplayPort Male to VGA Female Adapter Converter—Black	

Road 30 Hortonwood Industrial Estate | Telford, Shropshire TF1 7AB UK | www.c2g.com
UK Phone 0800 328 2916 | EMEA Phone +44 (0)1952 677300

GET CONNECTED