



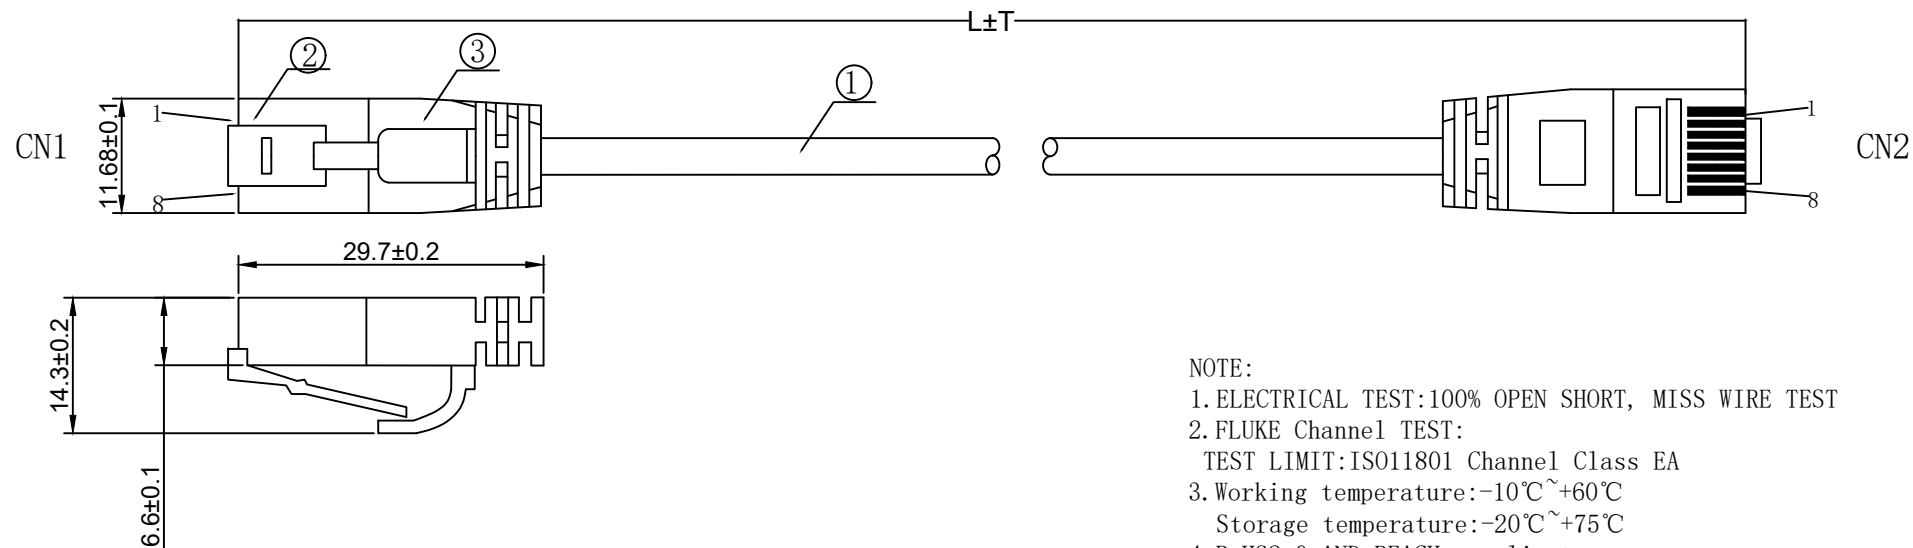

NOTE:

- 1.ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
- 2.FLUKE Channel TEST:
TEST LIMIT:ISO11801 Channel Class EA
- 3.Working temperature:-10℃~+60℃
Storage temperature:-20℃~+75℃
- 4.RoHS2.0 AND REACH compliant
- 5.Spray WORD:CAT6A U/FTP 4x2x32AWG/7 Ultraflex LSZH-TPE
ISO11801 & EN50173 & ANSI/TIA568C.2
- 6.Minimum of the bending radius is 15mm(Suitable for all meters)

PIN OUT



CN1 (568B)	CN2 (568B)
1 WHITE-ORANGE	1 WHITE-ORANGE
2 ORANGE	2 ORANGE
3 WHITE-GREEN	3 WHITE-GREEN
6 GREEN	6 GREEN
4 BLUE	4 BLUE
5 WHITE-BLUE	5 WHITE-BLUE
7 WHITE-BROWN	7 WHITE-BROWN
8 BROWN	8 BROWN
SHELL	DRAIN
	SHELL

MATERIAL LIST

③	OVER MOLD	75A PVC BLUE(PANTONE647C)	2	
②	PLUG	RJ45 8P8C Shielded Plug, PIN GOLD PLATED 3u", THE SHELL PLATED NICKEL, COLOUR:TRANSPARENT	2	
①	CABLE	CAT. 6A U/FTP CABLE (32AWG BC*1P+AL-FOIL)*4+DRAIN JACKET:ULTRAFLEX LSZH-TPE/BLUE (PANTONE647C), OD:3.6±0.2MM	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

		NEW	2022-07-01	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

DESC.	ROLINE GREEN Cat.6A U/FTP Patch cord 10G Slim Type Ultraflex LSZH-TPE, blue
-------	---

SECOMP

Item NO.	Length (mm)
21.44.3340	150±10
21.44.3341	300±10
21.44.3342	500±20
21.44.3343	1000±20
21.44.3344	1500±30
21.44.3345	2000±30
21.44.3346	3000±50
21.44.3347	5000±100