

Product Highlights

Full Resolution Video

HDMI video up to 4K @ 30 Hz Ultra HD resolution for stunning videos and images with no lag

Easy Expansion

Easily add 4 x USB 3.0 ports to any laptop or computer with a spare USB-C port. Simply plug in, no need to install additional software

Ultra-Fast USB 3.0

SuperSpeed USB 3.0 technology allows you to transfer files up to 10 times faster than with USB 2.0



DUB-2333

5-in-1 USB-C Hub with HDMI/Power Delivery

Features

High Fidelity Video Compatibility


- Ultra HD video resolution up to 4K @ 30 Hz¹

Versatile and Convenient

- Three USB 3.0 SuperSpeed 5 Gbps ports
- One USB 3.0 Type-C port with data sync and power delivery of up to 60 W (20 V @ 3 A)²
- Simply plug-and-play, no software required
- Compact design
- Compatible with Windows and macOS computers, Chromebooks and iPad Pro

The DUB-2333 5-in-1 USB-C Hub with HDMI/Power Delivery allows you to instantly add a second display and three additional USB 3.0 ports to your Windows and macOS computers, Chromebooks and iPad Pro. Just plug the DUB-2333 into an available USB-C port and you're ready to send content to your TV or monitor in full resolution, as well as connect up to three more USB devices. You can also sync and charge one USB-C device, meaning that you don't have to give up that USB-C port this hub is connected to.

Hardware Overview

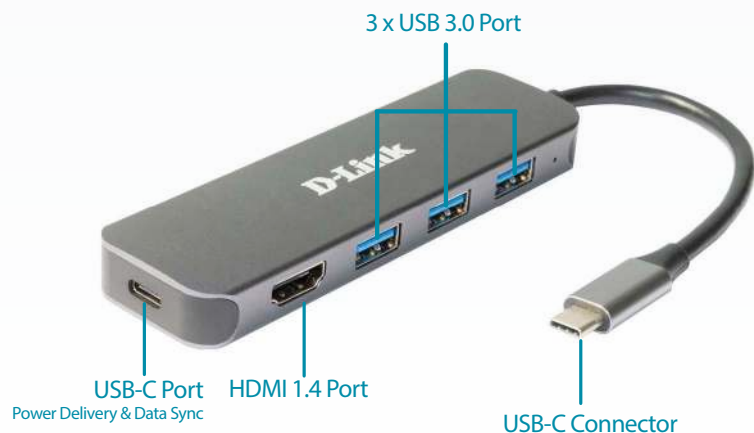

5-in-1 USB-C Hub with HDMI/Power Delivery

Technical Specifications

Connectivity

Interfaces	• One USB Type-C connector • Three USB 3.0 Type-A ports	• One USB Type-C/PD 3.0 port • One HDMI port
LEDs	• Power (per device) • Solid green - power is on	

General

Standards	• USB 3.0 • USB 2.0 • USB 1.1	
Data rate	• Up to 5 Gbps	
Resolution	• 4K @ 30 Hz	
System requirements	• Windows 7/8/8.1/10, macOS (OS X 10.8 and above) • Chromebook, iPad Pro	• USB Type-C port supporting DP Alt (DisplayPort Alternate Mode) for HDMI output

Physical

Dimensions (W x H x D)	• 118 x 35 x 13.5 mm	
Weight	• 70 g	
Power	• From computer (USB bus powered)	
Supplied charging voltage/current	• 20 V / 3 A (PD 3.0)	
Temperature	• Operating: 0 to 45 °C	• Storage: -10 to 70 °C
Humidity	• Operating: up to 85% non-condensing	• Storage: up to 85% non-condensing
Certifications	• CE	

¹ Please make sure that the USB Type-C port of your computer supports DP Alt (DisplayPort Alternate Mode).

² Please make sure that the USB Type-C port of your laptop supports PD 3.0.



For more information: eu.dlink.com