



VRLA Battery

MS 9-6

6V9.0AH

MS Series SLA Battery

MHB MS Series--Small-size batteries



- 100% before shipment testing, stable and reliable long-term quality
- patented grid alloy formula and updated manufacturing technique
- completely sealed and maintenance-free, low self-discharge
- Excellent charging and re-charging acceptance
- Cycle use: More than 260 cycles at 100% DOD
- Floating & standby use: 3-5 years

Application:

- Alarm System
- Cable Television
- Communication Equipment
- Emergency Power System
- Security System
- Medical Equipment
- UPS
- Power tools
- Control Equipment
- Toys

Construction:

- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerABS
- CoverABS
- SealantEpoxy
- Safety valve Rubber
- TerminalCopper
- SeparatorFiber glass
- ElectrolyteSulfuric acid

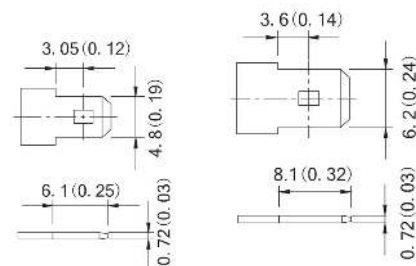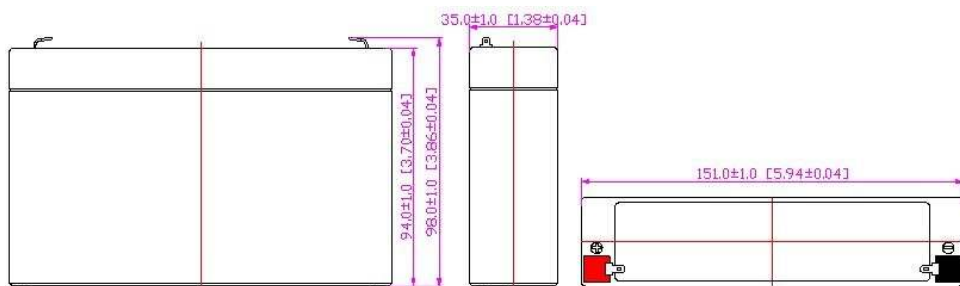


F1 Terminal

F2 Terminal


Speification:

Battery Model	MS 9-6 6V9.0AH			
Designed Floating Life	3~5 Years			
Capacity (25℃)	20HR(0.45A)	10HR(0.852A)	5HR(1.53A)	1HR(5.21A)
	9.00AH	8.52AH	7.65AH	5.21AH
Dimensions	Length	Width	Height	Total Height
	151mm (5.94inch)	35mm (1.38inch)	94mm (3.70inch)	98mm (3.86inch)
Approx. Weight	1.33Kg (2.93lbs) ±3%			
Internal Resistance	Full charged at 25℃ : ≤20mΩ			
Self Discharge	2% of capacity declined per month at (25℃)			
Capacity Affected by Temp.(20HR)	40℃	25℃	0℃	-15℃
	102%	100%	85%	65%
Charge Voltage(25℃)	Cycle use		Float use	
	7.20-7.50V(-15mV/℃), max. Current: 2.70A		6.75-6.90V (-20mV/℃)	


Terminal Voltage (V) and Discharge Time

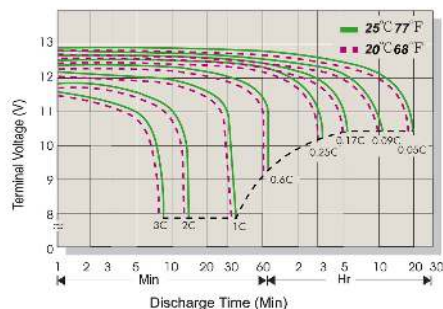


Capacity Retention Characteristic

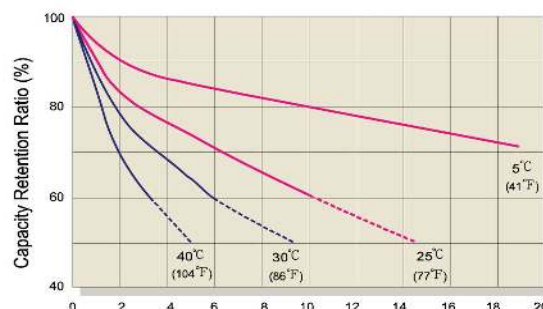


Battery Voltage and Charge Time for Standby Use

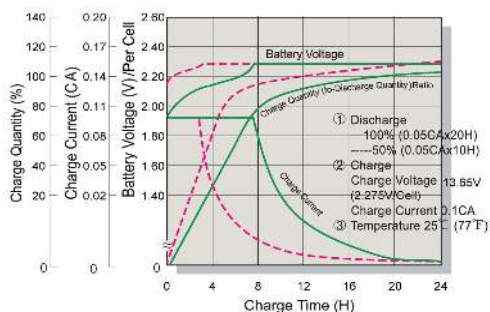


Battery Voltage and Charge Time for Cycle Use

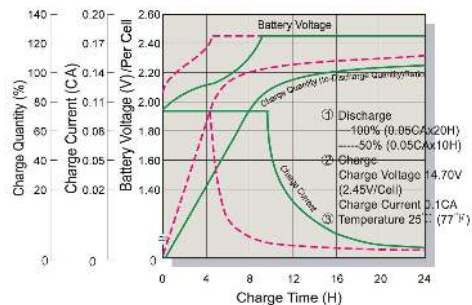

Float(or Standby) Service Life

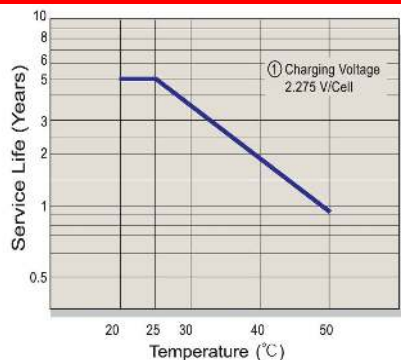

Cycle Service Life

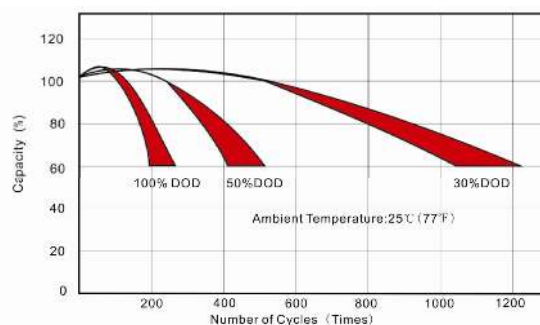

Constant Current Discharge(CC,Unit:A) at 25°C (77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.80V/Cell	25.30	17.98	13.99	8.68	5.12	2.99	2.27	1.808	1.502	1.283	0.837	0.442
1.75V/Cell	25.77	18.32	14.25	8.84	5.21	3.04	2.32	1.842	1.530	1.307	0.852	0.450
1.70V/Cell	28.09	19.41	15.11	9.19	5.30	3.10	2.36	1.874	1.557	1.330	0.867	0.458
1.67V/Cell	30.93	21.06	16.39	9.71	5.36	3.13	2.38	1.894	1.573	1.344	0.877	0.463
1.60V/Cell	33.50	22.16	17.25	10.12	5.42	3.17	2.41	1.951	1.590	1.359	0.886	0.468

Constant Power Discharge (CP,Unit:W) at 25°C (77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.80V/Cell	49.33	35.06	27.28	16.92	9.97	5.83	4.44	3.53	2.93	2.50	1.63	0.86
1.75V/Cell	50.25	35.71	27.79	17.24	10.16	5.94	4.52	3.59	2.98	2.55	1.66	0.88
1.70V/Cell	54.78	37.86	29.46	17.93	10.34	6.04	4.60	3.65	3.04	2.59	1.69	0.89
1.67V/Cell	60.30	41.07	31.96	18.93	10.45	6.11	4.65	3.69	3.07	2.62	1.71	0.90
1.60V/Cell	65.33	43.21	33.63	19.74	10.56	6.17	4.70	3.73	3.10	2.65	1.73	0.91