


SPECIFICATIONS

1.General Specifications

Model		LR□-E-□
Operating Ambient Temperature		-20°C ~ +50°C
Operating Ambient Humidity		Less than 90% RH (No Condensation)
Mass (Tolerance ±10%)	LR4	0.035kg
	LR5	0.04kg
	LR6	0.06kg
	LR7	0.065kg
Outer Dimensions		Refer to the 3.Outer Dimensions
Conformity Standards		UL 508, CSA-C22.2 No. 14 EMC Directive (EN 61000-6-4, EN 61000-6-2) RoHS Directive (EN 50581)
Remarks		Due to the characteristics of the LED elements, a variation in difference of the color tone and brightness of every product may occur

2.Model

2.1.1 Model Number Configuration

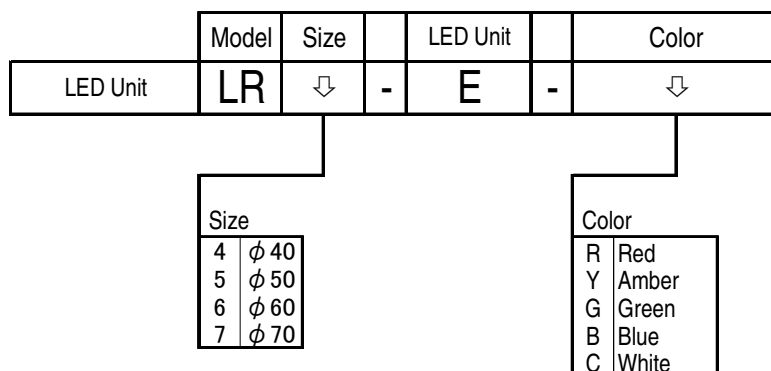

2.1.2 Model Number Example

LED Unit	LR5-E-R ● φ 50 ● LED Unit ● Red
----------	--

2.2 UL Registered Model


LED Unit	LR4-E-_, LR5-E-_, LR6-E-_, LR7-E-_
----------	------------------------------------

LR-E-W18B-1_2

PATLITE Corporation

LR□-E-□

(Unit:mm)

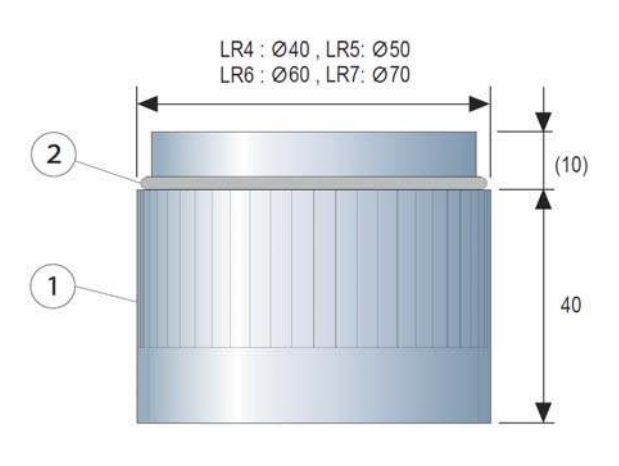

No.	Name	Material	UL Flammability
1	Globe	PC	V-2
2	O-ring	Silicone Rubber	-