



User Guide

AX1500 Wi-Fi 6 Range Extender

ME60X

CE Mark Warning



This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

OPERATING FREQUENCY (the maximum transmitted power)

2400 MHz -2483.5 MHz (20dBm)

5150 MHz -5250 MHz (23dBm)

5250 MHz -5350 MHz (23dBm)

5470 MHz -5725 MHz (30dBm)

EU Declaration of Conformity

MERCUSYS hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863.

The original EU Declaration of Conformity may be found at

<https://www.mercusys.com/en/ce>

RF Exposure Information

This device meets the EU requirements (2014/53/EU Article 3.1a) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

The device complies with RF specifications when the device used at 20 cm from your body.

National Restrictions

Attention: This device may only be used indoors in all EU member states, EFTA countries and Northern Ireland.

Frequency band: 5150 - 5250 MHz:

Indoor use: Inside buildings only. Installations and use inside road vehicles and train carriages are not permitted. Limited outdoor use: If used outdoors, equipment shall not be attached to a fixed installation or to the external body of road vehicles, a fixed infrastructure or a fixed outdoor antenna. Use by unmanned aircraft systems (UAS) is limited to within the 5170 - 5250 MHz band.

Frequency band: 5250 - 5350 MHz:

Indoor use: Inside buildings only. Installations and use in road vehicles, trains and aircraft are not permitted. Outdoor use is not permitted.

Frequency band: 5470 - 5725 MHz:

Installations and use in road vehicles, trains and aircraft and use for unmanned aircraft systems (UAS) are not permitted.

	AT	BE	BG	CH	CY	CZ	DE	DK
	EE	EL	ES	FI	FR	HR	HU	IE
	IS	IT	LI	LT	LU	LV	MT	NL
	NO	PL	PT	RO	SE	SI	SK	UK(NI)

UKCA Mark

**UK
CA**


UK Declaration of Conformity

Mercusys hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.

The original UK Declaration of Conformity may be found at
<https://www.mercusys.com/support/ukca/>

National Restrictions

Attention: This device may only be used indoors in Great Britain.

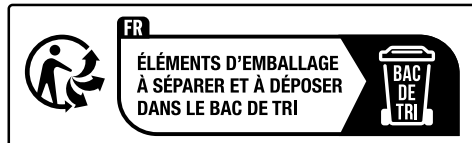

Korea Warning Statements

당해 무선설비는 운용중 전파혼신 가능성이 있음 .

NCC Notice

注意！

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前述合法通信，指依電信管理法規定作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。

安全諮詢及注意事項


- 限用物質含有情況標示聲明書



EAC

- Keep the device away from water, fire, humidity or hot environments.

- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use the device where wireless devices are not allowed.
- The socket-outlet shall be installed near the equipment and shall be easily accessible.
- Make sure the power socket has a good contact with the ground.
- Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)

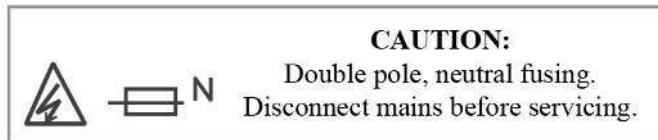

- This product uses radios and other components that emit electromagnetic fields. Electromagnetic fields and magnets may interfere with pacemakers and other implanted medical devices. Always keep the product and its power adapter more than 15 cm (6 inches) away from any pacemakers or other implanted medical devices. If you suspect your product is interfering with your pacemaker or any other implanted medical device, turn off your product and consult your physician for information specific to your medical device.

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

Explanation of the symbols on the product label

Symbol	Explanation
	Class II equipment
	Class II equipment with functional earthing
	Alternating current
	For indoor use only
	Caution, risk of electric shock
	Fuse is used in neutral N
	Caution
	Operator's manual
	RECYCLING This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.

CONTENTS

Conventions	01
Chapter 1 Introduction	02
1.1 Product Overview.....	02
1.2 Product Appearance.....	02
1.2.1. LED Explanation.....	02
1.2.2. Item Explanation	03
Chapter 2 Connect the Extender to the Internet	04
2.1 Method 1: Via a Web Browser.....	04
2.2 Method 2: Via WPS	08
2.3 Method 3: Via Mercusys App.....	09
Chapter 3 Mercusys Cloud Service	11
3.1 Register a Mercusys ID	11
3.2 Manage the User Mercusys IDs.....	12
3.1.1. Add Mercusys ID to Manage the Extender	12
3.1.2. Remove Mercusys ID(s) from Managing the Extender	13
3.3 Manage the Extender via the Mercusys App.....	13
Chapter 4 Customize Your Network	15
4.1 Check Internet Status	15
4.2 Configure Wireless Network.....	16
4.3 Change LAN Settings	18
4.4 Specify DHCP Server Settings	18
4.5 Set High Speed Mode	19
4.6 Set Access Control.....	20
4.7 Adjust Wi-Fi Coverage.....	23
Chapter 5 Use Your Extender as an Access Point.....	25
5.1 Set Up the Extender as an Access Point.....	25
5.2 Connect Wireless Devices to the Extender	26
5.3 LED Explanation for the Access Point Mode	27
Chapter 6 Manage the Extender.....	29
6.1 Set System Time	29
6.2 Control the LED.....	29

6.3 Set Power Schedule	30
6.4 Upgrade the Firmware	31
6.5 Back up and Restore Configuration Settings	32
6.6 Change Admin Account	33
6.7 Check System Log	34
FAQ (Frequently Asked Questions)	35

Conventions

This guide is a complement to Quick Installation Guide. The Quick Installation Guide provides instructions for quick internet setup, while this guide contains details of each function and demonstrates how to configure them in typical scenarios.

Note: Features available in this range extender may vary by model and software version. Range extender availability may also vary by region or ISP. All images, steps, and descriptions in this guide are only examples and may not reflect your actual product experience.

More Info

Specifications and the latest software can be found at the product page at the official website <http://www.mercusys.com>.

The Quick Installation Guide can be found where you find this guide or inside the package of the router.

Speed/Coverage Disclaimer

*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage per ft² are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection quality, and client condition.

*Use of 802.11ax (Wi-Fi 6), and features including OFDMA, MU-MIMO, 1024-QAM, BSS Color, and Target Wake Time requires clients to also support the corresponding features. Actual power reduction by Target Wake Time may vary as a result of network conditions, client limitations, and environmental factors.


Chapter 1 Introduction

1.1 Product Overview

The range extender connects to your router wirelessly, strengthening its signal and expanding its coverage into areas that could not otherwise be reached.

Multicolor LED helps you find the right location for your range extender for the best Wi-Fi extension.

1.2 Product Appearance

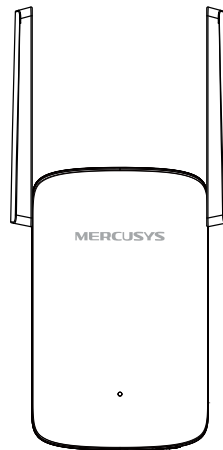

1.2.1 LED Explanation

LED	Status	Indication
Signal	Off	Power is off.
	Blinking green	The extender is starting, upgrading, or connecting to the router via WPS.
	Blinking Orange*	The extender is ready for setup.
	Blinking red	WPS connection failed.
	Solid red	The extender is not connected to the router.
	Solid green	The extender is connected to the router, and is in a good location.
	Solid orange	The extender is connected to the router, but is too far away from the router.

*Earlier models do not have this LED status. The LED shows solid red instead.

1. 2. 2. Item Explanation

Item	Description
RESET/WPS Button	Press and hold this button for more than 5 seconds until the Signal LED turns off to reset the extender. Press for 1 second to use the WPS function.
Ethernet Port	Connect your Ethernet-only device (such as a Blu-ray player, game console, DVR, or smart TV) to the Ethernet port of the extender to join the network.


Chapter 2 Connect the Extender to the Internet

This chapter introduces how to boost your host wireless coverage. Please follow the step-by-step instructions to set up the internet connection.

Power On

Plug the extender into a power outlet **near your router**.

Note: For safety and best performance, we suggest that you position the extender vertically as shown below.

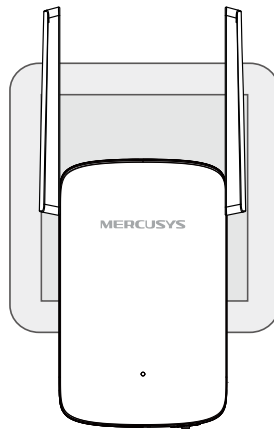

2.1 Method 1: Via a Web Browser

1. Connect your wireless device to the extender's network **MERCUSYS_RE_XXXX**.

Note:


1. The default SSID (network name) is printed on the product label at the back of the extender.
2. If you are using a computer, unplug the Ethernet cable from your computer first (if any).

2. Follow the instructions of the Quick Setup Wizard to connect the extender to your router.


- 1) Launch a web browser and enter **http://mwlogin.net** in the address field.



- 2) A login window will appear. Create a password to log in. For subsequent logins, use the password you have set.

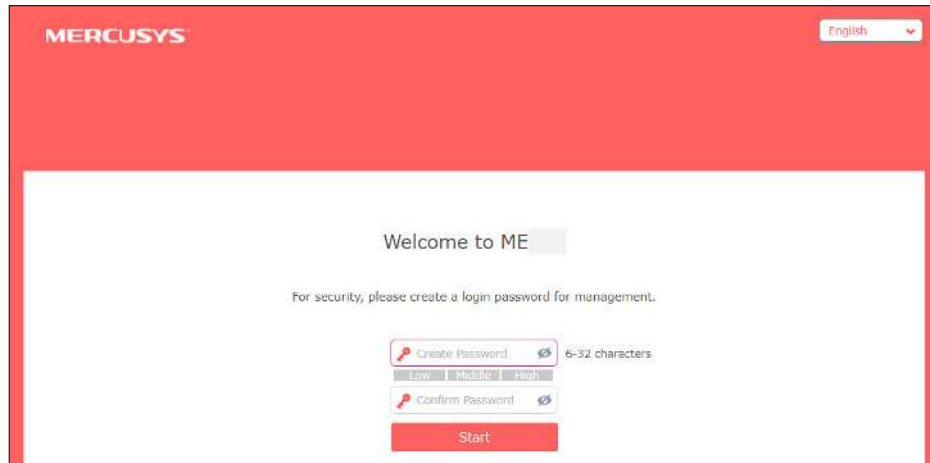

- 3) The extender will scan and display all available 2.4 GHz networks. Select your router's 2.4 GHz host network and enter the password to connect.

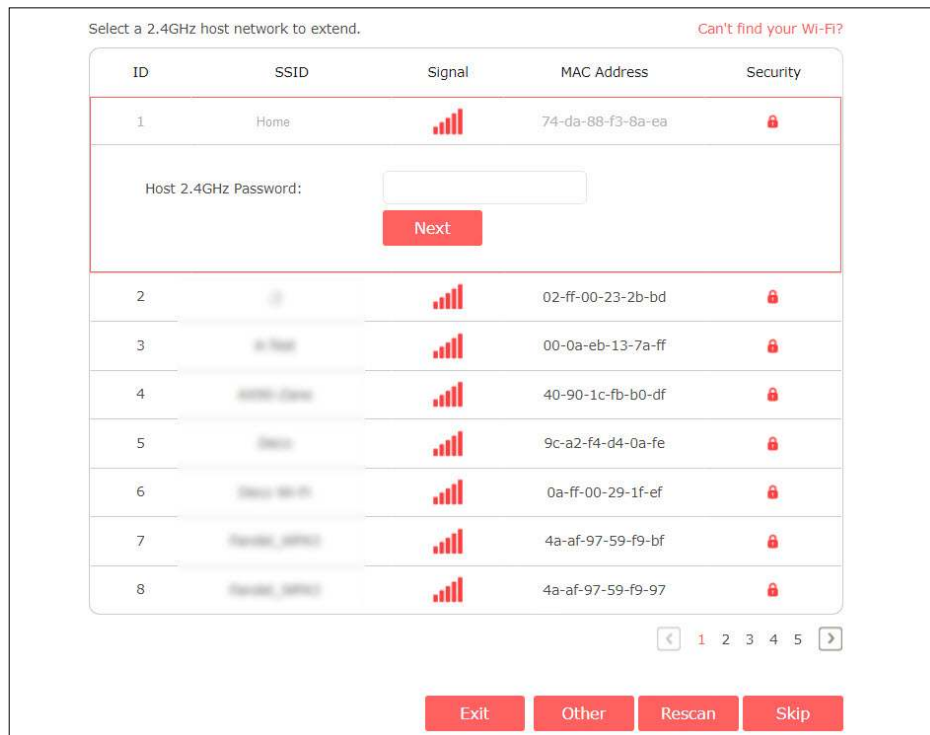

Note:

If the network you want to extend is on but not listed, please try the following steps.

- Move the extender closer to your router, and click **Rescan**.
- Click **Other** to manually enter the SSID (network name) and password of the network you want to extend.

- 4) Select your router's 5 GHz host network and enter the password to connect.

Select a 5GHz host network to extend. Can't find your Wi-Fi?

ID	SSID	Signal	MAC Address	Security
1	Home_5G		40-90-1c-fb-b0-dd	
Host 5GHz Password: Next				
2	TP-LINK_5GHz_2G		00-eb-d8-4a-ca-f1	
3	TP-LINK_5GHz_3G		34-60-f9-c0-32-68	
4	TP-LINK_5GHz_4G		ba-90-1c-fb-b0-d0	
5	TP-LINK_5GHz_5G		68-7f-f0-00-05-9a	
6	TP-LINK_5GHz_6G		0a-ff-00-1f-18-75	
7	TP-LINK_5GHz_7G		00-ff-00-1f-18-75	
8	TP-LINK_5GHz_8G		00-eb-d8-41-d4-95	

< 1 2 3 4 5 ... 8 >

Back Other Rescan Skip

5) Confirm the network passwords.

Please confirm your host network password.

2.4GHz Host Network

SSID: Home

Password:

5GHz Host Network

SSID: Home_5G

Password:

Back Confirm

6) Customize the extended network names or keep the default ones.

Set the extended network names (SSIDs).

Extended 2.4GHz SSID:

Extended 2.4GHz Password:
(Same as your host network password)

Extended 5GHz SSID:

Extended 5GHz Password:
(Same as your host network password)

7) Follow web instructions to relocate the extender.

Relocate your extender to optimize Wi-Fi coverage and performance.

- Plug in the extender about halfway between your router and the Wi-Fi dead zone. The location you choose must be within the range of the host network.
- Wait for about 2 minutes until the Signal LED turns solid green. If it doesn't, relocate the extender closer to the router to achieve better signal quality.



3. Done! Connect to the extended network and enjoy the internet.

Now connect to the extended network, then click **Finish**.

2.4GHz Extended Network

SSID: Home_EXT


Password:

5GHz Extended Network

SSID: Home_5G_EXT


Password:

☒ I have connected to the extended network.

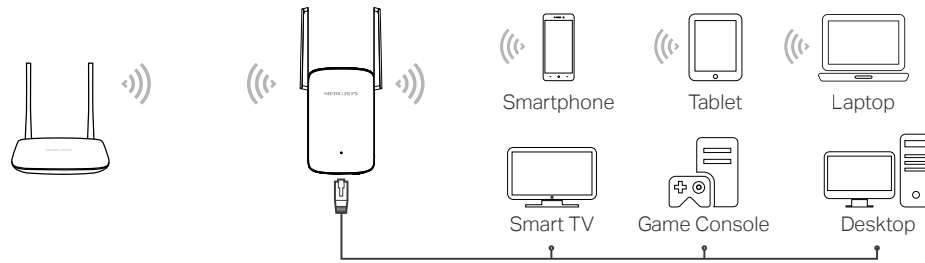

2.2 Method 2: Via WPS

1. Press the WPS button on your router.
2. Within two minutes, press the **RESET/WPS** button on your extender for 1 second. The Signal LED should change from flashing to solid green or orange, indicating a successful WPS connection.
3. Relocate the extender.
 - 1) Plug the extender into an electrical outlet between your host router and the Wi-Fi “dead” zone. The location you choose must be within the range of your existing host network.
 - 2) Wait until the Signal LED is lit and solid green. If it’s not, relocate it closer to the host router to achieve better signal quality.

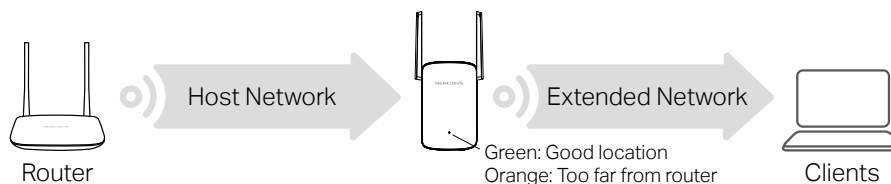


4. **Enjoy!** Connect to the extended network and enjoy the internet.

Extended Network Names:

Router’s network name with **EXT** at the end

Passwords:

Same as your router

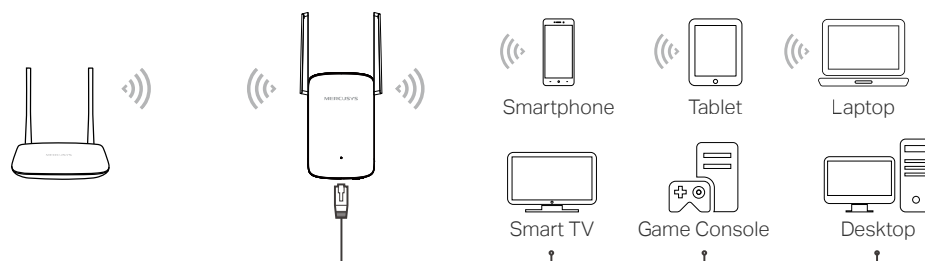


2.3 Method 3: Via Mercusys App

1. Scan the QR code to download the Mercusys app from the Apple App Store or Google Play.




2. Launch the app and log in with your Mercusys ID.


Note: If you don't have an account, create one first.

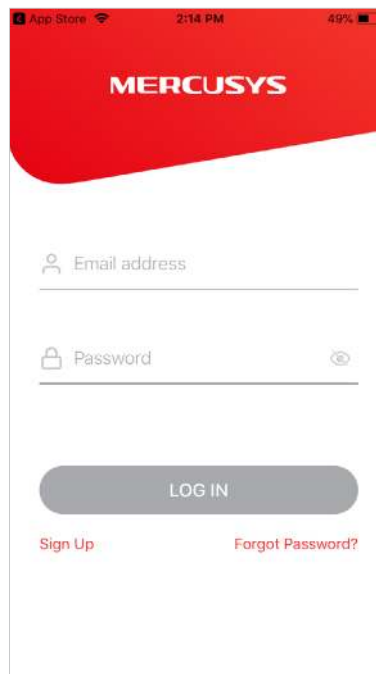

3. Connect your smartphone to the extender's network. Follow app instructions to set up the extender.

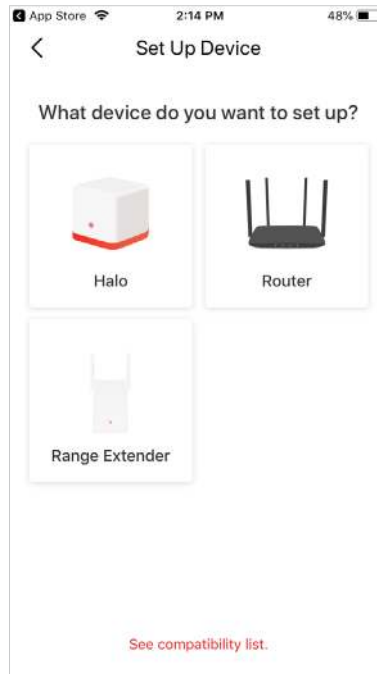

4. Enjoy! Connect to the extended network and enjoy the internet.

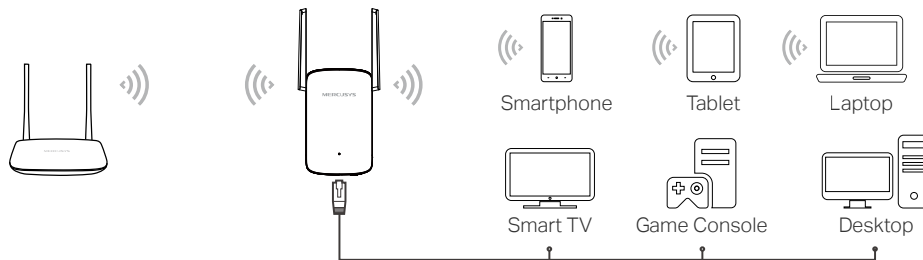


Chapter 3 Mercusys Cloud Service

Mercusys Cloud Service provides a better way to manage your cloud devices. Log in to your cloud device with a Mercusys ID, and you can easily monitor and manage your home network when you are out and about via the Mercusys app on your smartphone or tablet. To ensure that your cloud device stays new and gets better over time, the Mercusys Cloud will notify you when an important firmware upgrade is available. Surely you can also manage multiple cloud devices with a single Mercusys ID.

3.1 Register a Mercusys ID

When you log in after initial setup, the web page will ask whether you need Mercusys Cloud service. You can also access the Mercusys Cloud settings as follows:

1. Visit **<http://mwlogin.net>**, and log in with the password you set for the extender.
2. Go to **Settings > Mercusys ID**.
3. Click **Register Now** and follow the instructions to register a Mercusys ID.

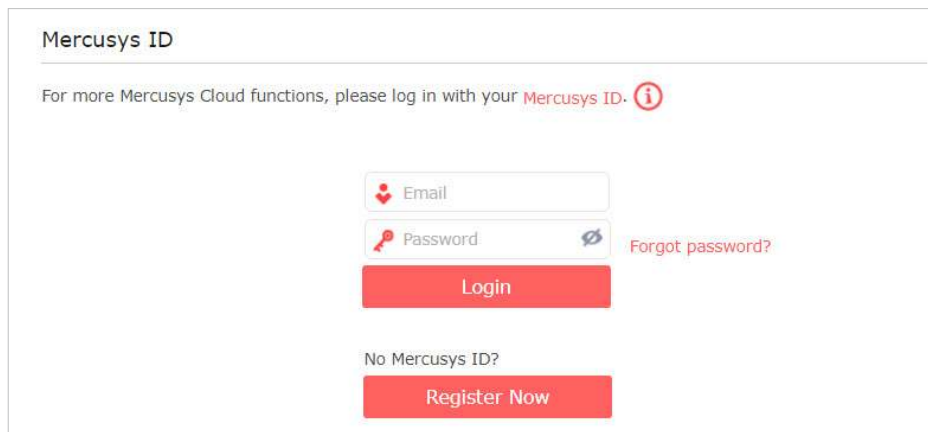

The screenshot shows the 'Mercusys ID' login and registration interface. At the top, it says 'Mercusys ID'. Below that, a message reads: 'For more Mercusys Cloud functions, please log in with your Mercusys ID.' followed by an information icon. There are two input fields: 'Email' with a red heart icon and 'Password' with a red key icon and a toggle eye icon. To the right of the password field is a link that says 'Forgot password?'. Below the input fields is a red 'Login' button. At the bottom, there is a link that says 'No Mercusys ID?' and a red 'Register Now' button.

4. After activating your Mercusys ID, come back to the Mercusys ID page to log in. The Mercusys ID used to log in to the extender for the first time will be automatically bound as an **Admin**.

Account Information

Email:

Password:

Device Information

Model: ME70X

Status: Being managed by

Unbind

Bound Accounts

+

 Bind

-

 Unbind

☐	ID	Email	Binding Date	Role
☐	1		11/02/2022	Admin

3.2 Manage the User Mercusys IDs

The Mercusys ID used to log in to the extender for the first time will be automatically bound as the **Admin** account.

An admin account can add or remove other Mercusys IDs to or from the same extender as **User** accounts.

All accounts can monitor and manage the extender locally or remotely, but **User** accounts cannot:

- Reset the extender to its factory default settings either on the web management page or in the Mercusys app.
- Add/remove other Mercusys IDs to/from the extender.

3.1.1 Add Mercusys ID to Manage the Extender

1. Visit **<http://mwlogin.net>**, and log in with your Mercusys ID.
2. Go to **Settings > Mercusys ID**, and focus on the **Bound Accounts** section.
3. Click **Bind**, enter another Mercusys ID as needed and save the settings.

Device Information

Model: ME...

Status: Being managed...

Bound Accounts

Unbind

Add Account

Email

Cancel Save

ID	Email	Binding Date	Role
1	...	11/02/2022	Admin

4. The new Mercusys ID will be displayed in the Bound Accounts table as a **User**.

Bound Accounts

+ Bind - Unbind

ID	Email	Binding Date	Role
1	...	11/02/2022	Admin
2	...	11/02/2022	User

3. 1. 2.Remove Mercusys ID(s) from Managing the Extender

1. Visit <http://mwlogin.net>, and log in with your Mercusys ID.
2. Go to **Settings > Mercusys ID**, and focus on the **Bound Accounts** section.
3. Tick the checkbox(es) of the Mercusys ID(s) you want to remove and click **Unbind**.

Bound Accounts

+ Bind - Unbind

ID	Email	Binding Date	Role
1	...	11/02/2022	Admin
2	...	11/02/2022	User

3.3 Manage the Extender via the Mercusys App

The Mercusys app runs on iOS and Android devices, such as smartphones and tablets.

1. Launch the Apple App Store or Google Play store and search "**Mercusys**" or

simply scan the QR code to download and install the app.



2. Launch the Mercusys app and log in with your Mercusys ID.

Note: If you don't have a Mercusys ID, create one first.

3. Connect your device to the extender's network.

4. Go back to the Mercusys app, select the model of your extender and log in with the password you set for the extender.

5. Manage your extender as needed.

Chapter 4 Customize Your Network

This chapter guides you on how to configure network settings that are available for this extender.


4.1 Check Internet Status

You can view the internet status of your extender to check whether you have successfully set up the extended network(s).

1. Visit **<http://mwlogin.net>**, and log in with the password you set for the extender.
2. Go to **Settings > Status** to view the internet status of your extender.
 - The extender runs normally.




- The extender fails to connect to the host networks. Please go to **Wireless > Connect to Host Network** to check whether the host network passwords are correct. If the problem still exists, relocate the extender closer to the router to achieve better signal quality.

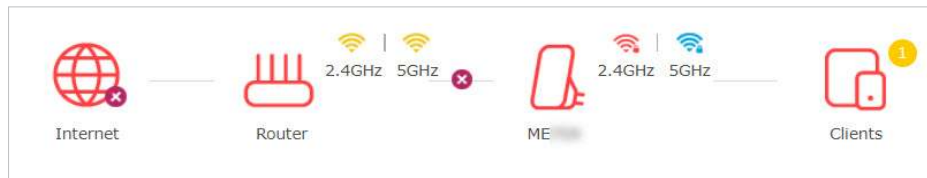

- The extender is connected to the host networks, but is not transmitting data. Please check the internet connection of your router.



- The extender is connected to the router abnormally. Please go to **Settings > Network** and try setting your extender to obtain an IP address automatically.

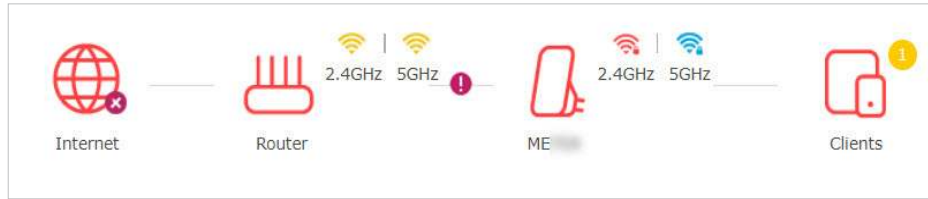

Click the icon of the Internet/Router/Range Extender/Clients to view corresponding information.

4.2 Configure Wireless Network

If you want to extend another host network after Quick Setup, you can refer to this section. Moreover, you can change the wireless settings for your extended networks.

Visit <http://mwlogin.net>, and log in with the password you set for the extender.

- To extend another host network:

1. Go to **Settings > Wireless > Connect to Host Network**.

Connect to Host Network

2.4GHz Network:

☒ Connect to 2.4GHz Network

Wireless Scanner

Host 2.4GHz SSID:

Home

Host 2.4GHz Security:

WPA2-PSK

Host 2.4GHz Password:

5GHz Network:

☒ Connect to 5GHz Network

Wireless Scanner

Host 5GHz SSID:

Home_5G

Host 5GHz Security:

WPA2-PSK

Host 5GHz Password:

Save

2. Enable **2.4GHz Network** and/or **5GHz Network**.

3. Click **WIRELESS SCANNER** to find available networks, and select the network you want to extend.

Note:

If the network you want to extend is on but not listed, please try the following steps.

- Move the extender closer to your router, and refresh the list.

- You can manually enter the SSID (network name) and password of the network you want to extend, and Save the settings.

4. Once a host network is selected, the SSID and security type will be automatically filled in. If the selected network is encrypted, enter the password in the **Password** field.

5. Save the settings.

- To enable or disable the extended network:

1. Go to **Settings > Wireless > Extended Network**.

Extended Network Settings

Extended 2.4GHz: ☒ Enable

Extended 2.4GHz SSID: Copy Host SSID

☐ Hide SSID broadcast

Note: The extended 2.4GHz password is the same as your Host password.

Extended 5GHz: ☒ Enable

Extended 5GHz SSID: Copy Host SSID

☐ Hide SSID broadcast

Note: The extended 5GHz password is the same as your Host password.

Save

2. Extended networks are enabled by default. If you want to disable the wireless function of a certain band, just clear the **Enable** checkbox. In this case, all the wireless settings of this band will be invalid.

3. Save the settings.

- To change the wireless network name (SSID):

1. Go to **Settings > Wireless > Extended Network**.

2. Create a new SSID or click **Copy Host SSID**. The value is case-sensitive.

3. Save the settings.

Note:

If you have changed the wireless settings via a wireless device, you will be disconnected after the settings are applied. Please write down the new SSID for future use.

- To hide the SSID of the extended network:

1. Go to **Settings > Wireless > Extended Network**.
2. Select **Hide SSID broadcast**, and the corresponding SSID will not be displayed when wireless devices scan for local wireless networks. You need to manually enter the SSID to join the network.
3. Save the settings.

4.3 Change LAN Settings

The extender is preset with a default LAN IP 192.168.0.254, with which you can log in to the web management page. The LAN IP address, together with the Subnet Mask, also defines the subnet that the connected devices are on. If the IP address conflicts with another device on your local network or your network requires a specific IP subnet, you can change it.

1. Visit **<http://mwlogin.net>**, and log in with the password you set for the extender.
2. Go to **Settings > Network**. Locate the **Network Settings** section.
3. Select **Use the following IP address**.

Network Settings

☐ Obtain an IP address automatically(recommended)

☒ Use the following IP address

IP Address: 192.168.0.254

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.0.254

Primary DNS: 0.0.0.0

Secondary DNS: 0.0.0.0 (Optional)

Save

4. Enter a new **IP Address** as needed, and leave the **Subnet Mask** as the default settings.
5. Enter the gateway that is in the same subnet as the **IP Address**. The gateway is usually the LAN IP address of your router.
6. Leave the primary and secondary DNS addresses as the default settings.
7. Save the settings.

4.4 Specify DHCP Server Settings

By default, the DHCP (Dynamic Host Configuration Protocol) Server is auto and the extender acts as a DHCP server and dynamically assigns TCP/IP parameters to client devices from the IP Address Pool when the router's DHCP server is disabled. You can change the settings of the DHCP Server if necessary.

1. Visit **<http://mwlogin.net>**, and log in with the password you set for the extender.
2. Go to **Settings > Network**. Locate the **DHCP Server** section.

DHCP Server

DHCP Server: ☐ Auto ☒ On ☐ Off

IP Address Pool: -

Address Lease Time: minutes. (1-2880. The default value is 1.)

Default Gateway: (Optional)

Primary DNS: (Optional)

Secondary DNS: (Optional)

Save

1. Select **On** to enable the DHCP Server of the extender.
2. Enter the starting and ending IP addresses in the **IP Address Pool**.
3. Enter other parameters if the ISP offers. The Default Gateway is automatically filled in and is the same as the LAN IP address of the router.
4. Save the settings.

4.5 Set High Speed Mode

The High Speed feature switches off one of the wireless bands to leave one high-performance, super-fast network, ideal for HD streaming and gaming applications.

If most of your devices are connected to one wireless band, this feature can increase the overall performance of your wireless network.

Note:

Before enabling this feature, please go to **Settings > Wireless > Extended Network** and check that the 2.4GHz and 5GHz bands are both enabled. Additionally, if you are going to disable the 2.4GHz network, it's recommended to first make sure all your wireless devices support 5GHz network connection.

1. Visit **<http://mwlogin.net>** and log in with the password you set for the extender.
2. Go to **Settings > Advanced Settings > High Speed**.

3. Enable **High Speed Mode**.

4. Select a high speed mode as needed.

- Select the **Auto** mode. The extender will decide which band the high-speed network will work on based on its wireless connection to your host router. The other band will be disabled.

High Speed

High Speed Mode:
☒ Auto(Recommended)

The extender will automatically choose the best band to ensure high-performance, super-fast connections.

☐ Manual

Save

- Select the **Manual** mode and choose to transmit 2.4GHz band or 5GHz band only.

High Speed

High Speed Mode:
☐ Auto(Recommended)
☒ Manual

☒ Transmit only the 2.4GHz band.



Router 5GHz Range Extender 2.4GHz Clients

Note: With High Speed enabled, the 5GHz band of extender will be switched off.

☐ Transmit only the 5GHz band.



Router 2.4GHz Range Extender 5GHz Clients

Note: With High Speed enabled, the 2.4GHz band of extender will be switched off.

Save

5. Save the settings.

4.6 Set Access Control

Access Control allows you to permit or block specific devices from accessing the internet for a specific period.

1. Visit **http://mwlogin.net** and log in with the password you set for the extender.
2. Go to **Settings > Advanced Settings > Access Control**.
3. Enable **Access Control**.




Access Control

Access Control: ☒

- **To block specific device(s):**

Note: Devices connected to the extender via an Ethernet cable cannot be blocked.

1. Select **Blacklist** and save the settings.
2. Find the devices in the **Online Devices** table and click **Block**.

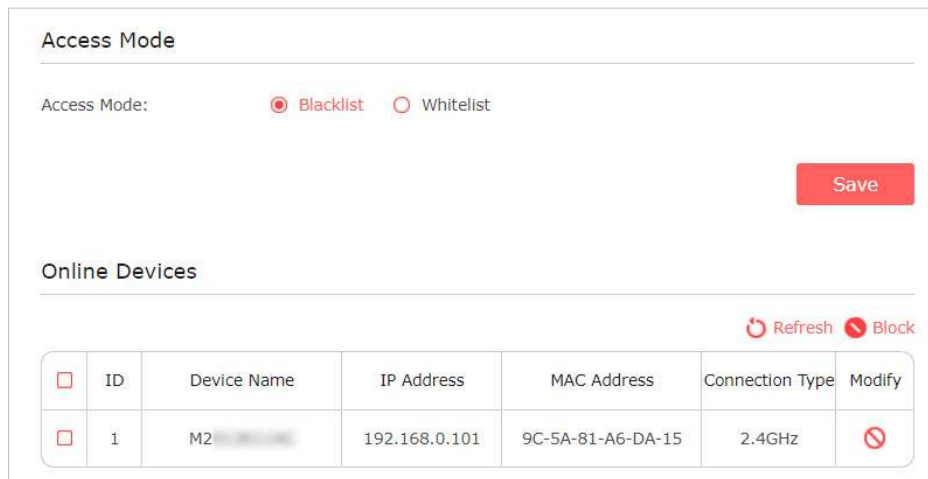

Access Mode

Access Mode: ☒ Blacklist ☐ Whitelist

Save

Online Devices

Refresh Block

☐	ID	Device Name	IP Address	MAC Address	Connection Type	Modify
☐	1	M2	192.168.0.101	9C-5A-81-A6-DA-15	2.4GHz	

In the **Devices in Blacklist** table, you can manually add devices or edit the entries to custom the effective time.

Devices in Blacklist

+ Add
 - Delete

☐	ID	Device Name	MAC Address	Modify
--	--	--	--	--

Device Name:

MAC Address:

Effective Time:

☒ Cannot access at any time

☐ Cannot access based on the time schedule

Time:
 --Pleas ▾ :
 --Pleas ▾ -
 --Pleas ▾ :
 --Pleas ▾

Day(s):
 --Please Select- ▾

☐ Monday
 ☐ Tuesday

☐ Wednesday
 ☐ Thursday

☐ Friday
 ☐ Saturday

☐ Sunday

Cancel
Save

- To permit specific device(s):

1. Select **Whitelist** and save the settings.

Access Mode

Access Mode:

☐ Blacklist☒ Whitelist

Save

Online Devices

Refresh

ID	Device Name	IP Address	MAC Address	Connection Type
1	M2-XXXXXX	192.168.0.101	9C-5A-81-A6-DA-15	2.4GHz

2. In the **Devices in Whitelist** table, manually add devices and custom the effective time.

Devices in Whitelist

+ Add

- Delete

☐	ID	Device Name	MAC Address	Modify
☐				

Device Name:

MAC Address:

Effective Time:

☒ Access at any time

☐ Access based on the time schedule

Time:

-Pleas ▾

:

-Pleas ▾

:

-Pleas ▾

:

-Pleas ▾

Day(s):

-Please Select- ▾

☐ Monday
 ☐ Tuesday
 ☐ Wednesday
 ☐ Thursday
 ☐ Friday
 ☐ Saturday
 ☐ Sunday

Cancel

Save


4.7 Adjust Wi-Fi Coverage

You can set the extender's Wi-Fi coverage depending on how large you want your Wi-Fi area to be.

1. Visit **<http://mwlogin.net>** and log in with the password you set for the extender.
2. Go to **Settings > Advanced Settings > Wi-Fi Coverage**.
3. Select your desired Wi-Fi coverage level for the extender.

Wi-Fi Coverage

Set the Wi-Fi coverage of your extender as needed.




- ☒ **Maximum Coverage**
The extender will provide a long-range Wi-Fi signal but use up more power.
- ☐ **Intermediate Coverage**
The extender will provide a medium-range Wi-Fi signal.
- ☐ **Minimum Coverage**
The extender will provide a short-range Wi-Fi signal and use up less power.

Save

4. Save the settings.


Chapter 5 Use Your Extender as an Access Point

The extender can work as an access point, transforming your existing wired network to a wireless one.

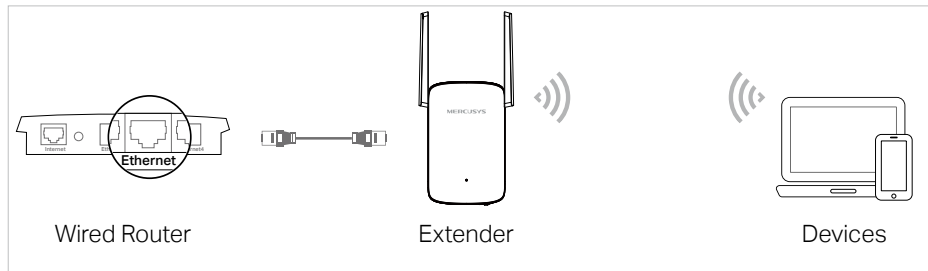

5.1 Set Up the Extender as an Access Point

1. Connect your computer to the extender via an Ethernet cable.
2. Visit <http://mwlogin.net>, and log in with the password you set for the extender.
3. Click **Mode** in the top right corner of the page. Select **Access Point Mode** and save the settings. The extender will reboot and switch to Access Point mode.

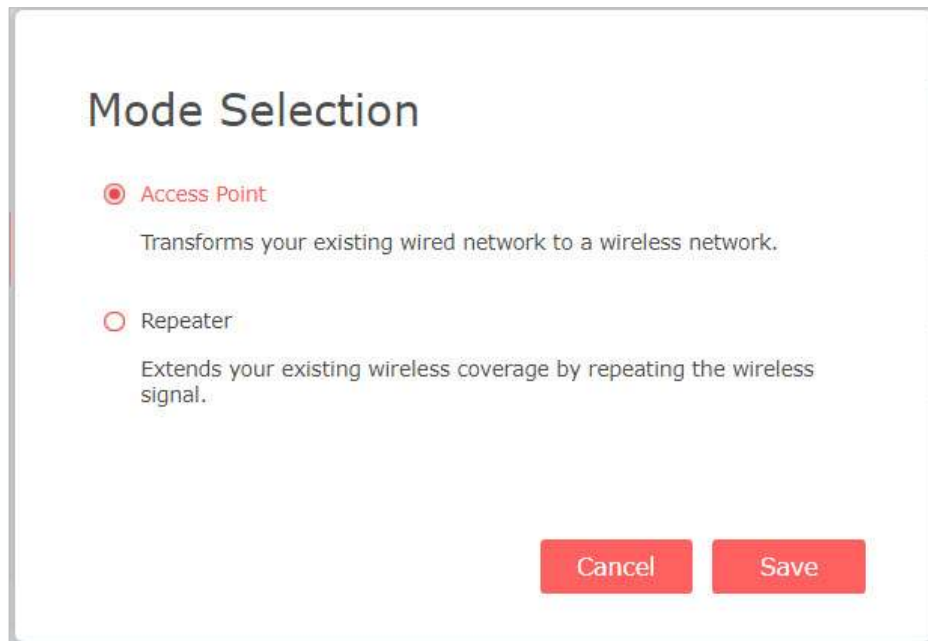

4. Visit <http://mwlogin.net>, and log in with the password you set for the extender.
5. Go to **Settings > Quick Setup** to configure your extender.
 - 1) Customize your wireless SSID and password and click **NEXT**.

Wireless 2.4GHz: ☒ Extend network on 2.4GHz

Extended 2.4GHz SSID: ☐ Hide SSID broadcast

Extended 2.4GHz Password:

Wireless 5GHz: ☒ Extend network on 5GHz

Extended 5GHz SSID: ☐ Hide SSID broadcast

Extended 5GHz Password:

2) Confirm the information and click **Finish**.

2.4GHz Extended Network

Extend network on 2.4GHz: On

Extended 2.4GHz SSID: Home

Hide SSID: Off

Extended 2.4GHz Password:

5GHz Extended Network

Extend network on 5GHz: On

Extended 5GHz SSID: Home_5G

Hide SSID: Off

Extended 5GHz Password:

6. Connect the extender to your modem or wired router via an Ethernet cable. Now you can enjoy Wi-Fi.

5.2 Connect Wireless Devices to the Extender

Method 1: Connect to the extender manually

You can connect your wireless devices to the extender by using the extender's wireless network names and passwords.

Method 2: Connect to the extender via WPS

Wi-Fi Protected Setup (WPS) provides an easier way to set up a secure Wi-Fi connection.

Wireless devices that support WPS, including Android phones, tablets, and most USB network cards, can be connected to your extender through this method (not supported by iOS devices).

1. Visit <http://mwlogin.net>, and log in with the password you set for the extender.

2. Go to **Settings > Wireless > WPS**.

3. Enable **WPS**.




WPS

Enable WPS: ☒

4. Connect via WPS:

- AP's PIN: Enable **AP's PIN** and enter the PIN on your device. You can click **Generate** to get a new PIN or click **Default** to restore the PIN to its factory one.

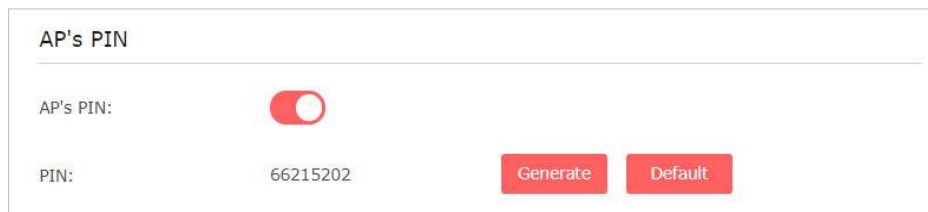


AP's PIN

AP's PIN: ☒

PIN: 66215202 Generate Default

- Push button: Select **Push Button** and click **Connect**, then enable WPS on your device within 2 minutes.

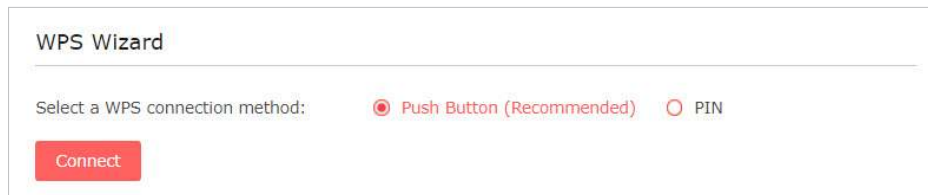


WPS Wizard

Select a WPS connection method: ☒ Push Button (Recommended) ☐ PIN

Connect

- Client's PIN: Select **PIN** and enter your device's PIN in the blank, then click **Connect**.

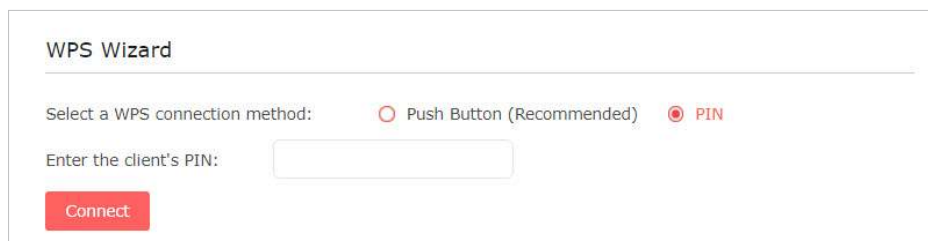

WPS Wizard

Select a WPS connection method: ☐ Push Button (Recommended) ☒ PIN

Enter the client's PIN:

Connect

5.3 LED Explanation for the Access Point Mode

When the extender works in the Access Point mode, you can check its working status by following the LED Explanation table below.

LED	Status	Indication (For Range Extender Mode)
Signal	Off	Power is off.
	Blinking green	The extender is starting, upgrading, or performing WPS connection.
	Blinking Orange*	The extender is ready for setup.
	Blinking red	WPS connection failed.
	Solid green	Both 2.4 GHz and 5 GHz Wi-Fi bands are working well.
	Solid orange	Either 2.4 GHz or 5 GHz Wi-Fi band is disabled.
	Solid red	Both 2.4 GHz and 5 GHz Wi-Fi bands are disabled.

*Earlier models do not have this LED status. The LED shows solid red instead.

Chapter 6 Manage the Extender

This chapter presents how to manage and maintain your extender.

6.1 Set System Time

The System Time of the extender will be used for time-based function such as the Power Schedule function. If you have enabled the Daylight Saving Time feature, the system time will be synchronized with the daylight saving time you configure.

1. Visit **<http://mwlogin.net>**, and log in with the password you set for the extender.
2. Go to **Settings > System Tools > Time Settings**.

- To get system time:

1. Select your local **Time Zone** from the drop-down list.

The screenshot shows the 'Time Settings' interface. It includes a 'Current Time' field displaying '01/01/2022 08:33:39' and a 'Time Zone' dropdown menu currently set to '(UTC+08:00) Coordinated Universal Time+08'. A red 'Save' button is located at the bottom right of the settings box.

2. Save the settings.

- To set up Daylight Saving Time:

1. Enable **Daylight Saving Time**.

The screenshot shows the 'Daylight Saving Time' configuration page. The 'Enable Daylight Saving Time' checkbox is checked. The 'Start' date is configured as 2022 Mar Last Sun 1 AM, and the 'End' date is configured as 2022 Oct Last Sun 1 AM. A red 'Save' button is at the bottom right.

2. Select the **Start** and **End** dates and time of the daylight saving time at your local time zone.
3. Save the settings.

6.2 Control the LED

The LED of the extender indicates its activities and status. You can turn off the LED when you don't need it.

1. Visit **<http://mwlogin.net>**, and log in with the password you set for the extender.
2. Go to **Settings > System Tools > LED Control**.

- To turn off the LED:

Disable **LED Status**.



LED Control

LED: ☐


- To specify a time period when the LED turns off:

1. Enable **Night Mode**.
2. Specify the LED off time period.

Note:

The effective LED off time is based on the time of the extender. You can go to **Settings > System Tools > Time Settings** to modify the time.

3. Save the settings.

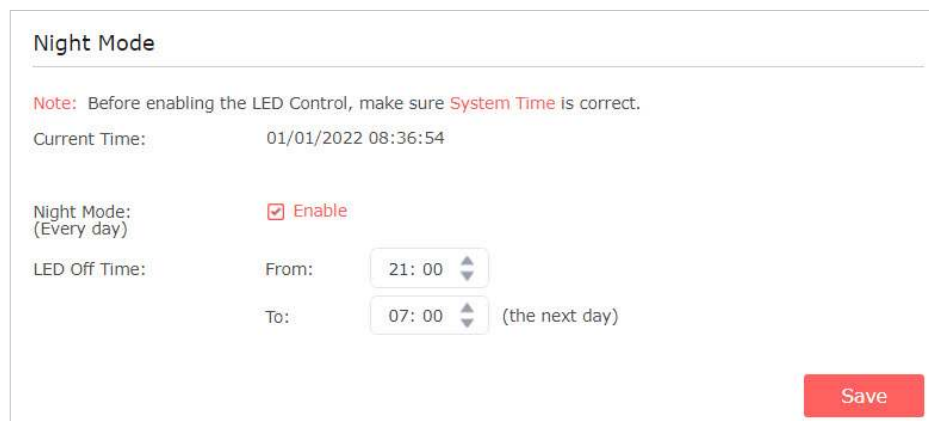

Night Mode

Note: Before enabling the LED Control, make sure **System Time** is correct.

Current Time: 01/01/2022 08:36:54

Night Mode: ☒ **Enable**

LED Off Time: From: 21:00 To: 07:00 (the next day)

Save

6.3 Set Power Schedule

The Power Schedule feature allows you to specify a time period during which the extender is off.

1. Visit **<http://mwlogin.net>**, and log in with the password you set for the extender.
2. Go to **Settings > Advanced Settings > Power Schedule**.

- To specify a time period when the extender is off:

1. Click **Add**.
2. Specify the power off time period and repeat days.

Note:

The effective power off time is based on the time of the extender. You can go to **Settings > System Tools > Time Settings** to modify the time.

Power Schedule

Note: Before enabling Power Schedule, please make sure the **System Time** is correct.

Current Time: 01/01/2022 08:37:53

+ Add - Delete

☐	ID	Power Off Time	Repeat:	Status	Modify
☐		Power Off Time From: 21:00 To: 09:00 (the next day) Repeat: Sun Mon Tue Wed Thu Fri Sat Cancel Save			

3. Save the settings.

6.4 Upgrade the Firmware

You can download the latest firmware file from the **Support** page at our website **www.mercusys.com** and upgrade the extender to the latest firmware version.

Note:

- Make sure the latest firmware file is matched with the hardware version.
- Make sure that you have a stable connection between the extender and your computer. It is NOT recommended to upgrade the firmware wirelessly.
- We strongly recommend you back up the current configuration settings before firmware upgrade.
- Do NOT power off the extender during the firmware upgrade.

1. Visit **http://mwlogin.net**, and log in with the password you set for the extender.
2. Go to **Settings > System Tools > Firmware Upgrade**.
3. Choose a way to upgrade your firmware.

- **Online Update**

Click **Check for upgrade** to see whether new firmware is released. If there is new firmware, click **Upgrade**

- **Local Update**

- 1) Download the latest firmware file for the extender from our website **www.mercusys.com**.
- 2) Click **Browse** to locate the downloaded firmware file, and click **Upgrade**.

Device Information

Firmware Version: 3.0.0 Build 1000000000 Rev. 00790

Hardware Version: ME 100-10.0

Online Upgrade

Latest Version: 3.0.0 Build 1000000000 Rev. 00790

Check for upgrade

Local Upgrade

New Firmware File: Browse

Upgrade

6.5 Back up and Restore Configuration Settings

The configuration settings are stored as a configuration file in the extender. You can back up the configuration file and restore the extender to the previous settings from the backup file when needed. Moreover, if necessary, you can erase the current settings and reset the extender to the default factory settings.

1. Visit **http://mwlogin.net**, and log in with the password you set for the extender.
2. Go to **Settings > System Tools > Backup & Restore**.

- **To back up configuration settings:**

Click **Backup** to save a copy of the current settings to your local computer. A '.bin' file of the current settings will be stored on your computer.

Backup

Save a copy of your current settings.

Backup

- **To restore previous settings from a saved file:**

1. Click **Browse** to locate the backup configuration file stored on your computer, and

click **Restore**.

2. Wait a few minutes for the restore and reboot.

Note: During the restore process, do not power off or reset the extender.

- **To reset the extender to factory default settings:**

1. Click **Factory Restore** to reset all settings, or click **Restore** if you want to keep your login and cloud account information.

2. Wait a few minutes for the reset and reboot.

Note:

1. During the reset process, do not power off or reset the extender.
2. We strongly recommend you back up the current configuration settings before resetting the extender.

6.6 Change Admin Account

The account management feature allows you to change your login password of the web management webpage.

1. Visit **<http://mwlogin.net>**, and log in with the password you set for the extender.
2. Go to **Settings > System Tools > Admin Account**.
3. Enter the old password. Then enter the new password twice (case-sensitive) and save the settings.

Admin Account

Old Password:

New Password:

6-32 characters

Low

Middle

High

Confirm Password:

Save

4. Use the new password for future logins.

6.7 Check System Log

If the extender is not working properly, you can save the system log and send it to our technical support team.

1. Visit **<http://mwlogin.net>**, and log in with the password you set for the extender.
2. Go to **Settings > System Tools > System Log**.

• To save the system log locally:

1. Choose the type and level of the system log as needed.
2. Click **Save Log** to save the system logs to a local disk.

System Log

Log Filter:

Type= ALL

and Level= ALL

Refresh

Delete All

ID	Time	Type	Level	Log Content
1	2022-01-01 08:42:54	DHCPC	INFO	Sent a detection for DHCP.

Save Log

FAQ (Frequently Asked Questions)

Q1. How to restore my extender's configuration to its factory default settings?

- Option 1: With the extender powered on, press and hold the RESET/WPS button for more than 5 seconds until the Signal LED turns off, then release the button. The extender will reboot and reset to factory settings.
- Option 2: Log in to the extender's web management page, go to **Settings > System Tools > Backup & Restore**, and click **FACTORY RESTORE**.

Q2. What should I do if I forgot my login password?

- Restore the extender's configuration to its factory default settings by referring to **Q1**, then create a new password when prompted.

Q3. What should I do if I cannot log in to the extender's web management page?

- Make sure your wireless device is connected to the extended network using the extended SSID.
- Verify that **http://mwlogin.net** is correctly entered in the web browser.
- If you are using a computer, make sure it is set to obtain an IP address automatically.
- Refer to **Q1** to reset the extender and try again.