

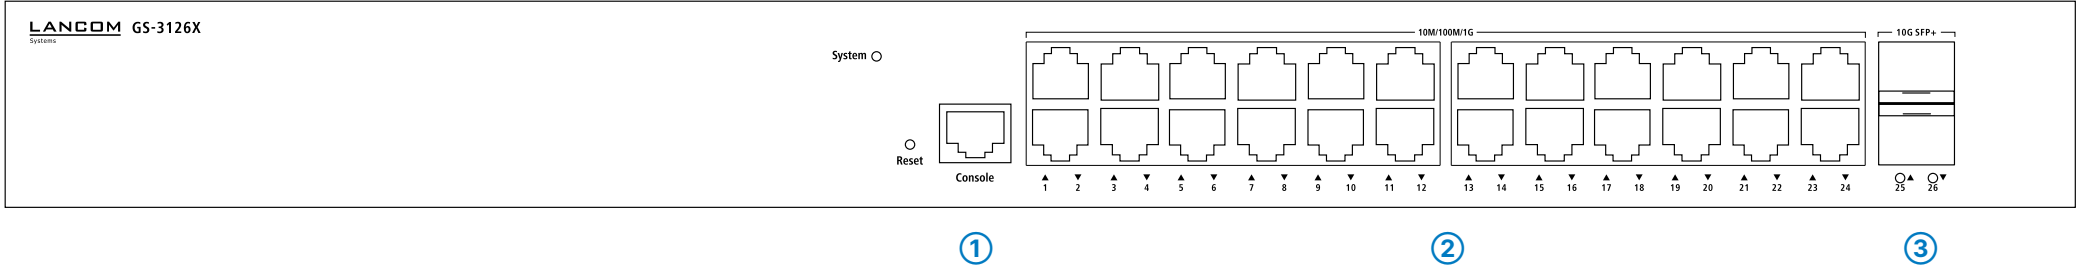


Hardware Quick Reference


LANCOM GS-3126X



- ① **Configuration interface (Console)**
Connect the configuration interface via the included serial configuration cable to the serial interface of the device you want to use for configuring / monitoring the switch.
- ② **TP Ethernet interfaces 10M / 100M / 1G**
Use Ethernet cables to connect the interfaces 1 to 24 to your PC or a LAN switch.

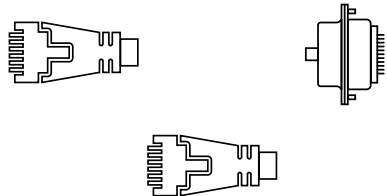

- ③ **SFP+ interfaces 1G / 10G**
Insert suitable LANCOM SFP modules into the SFP+ interfaces 25 to 26. Choose cables which are compatible with the SFP modules and connect them as described in the module's documentation.
- ④ **Power connector (device back side)**
Supply power to the device via the power connector. Please use the IEC power cable supplied or a country-specific LANCOM Power Cord.
- ⑤ **ATTENTION:** High touch current possible! Connect to earth before connecting the power supply.



Before initial startup, please make sure to take notice of the information regarding the intended use in the enclosed installation guide!

Operate the device only with a professionally installed power supply at a nearby power socket that is freely accessible at all times.

The power plug of the device must be freely accessible.


Please note that support for third-party accessories (SFP and DAC) is not provided.



Please observe the following when setting up the device

- For devices to be operated on the desktop, please attach the adhesive rubber footpads
- Do not rest any objects on top of the device or stack multiple devices
- Keep all ventilation slots of the device clear of obstruction
- Mount the device into a 19" unit in a server cabinet using the provided screws and mounting brackets.

Mounting & connecting

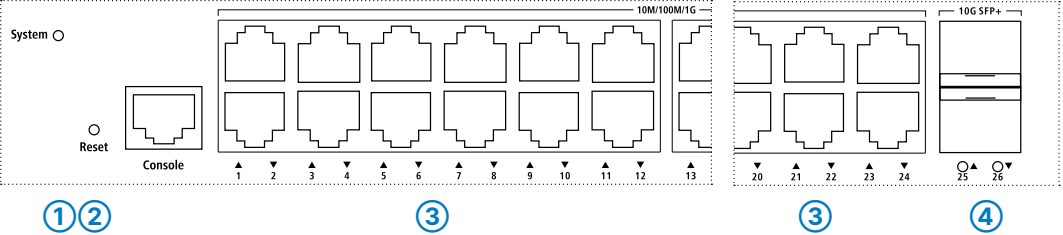

① System LED	③ TP Ethernet ports 10M / 100M / 1G
Off	Port inactive or disabled
Green	Link 1000 Mbps
Green, blinking	Data transfer, link 1000 Mbps
Orange	Link ≤ 100 Mbps
Orange, blinking	Data transfer, link ≤ 100 Mbps
② Reset button	④ SFP+ ports 1G / 10G
~ 5 sec. pressed	Port inactive or disabled
Pressed until all port LEDs glow	Link 10 Gbps
	Blue, blinking
	Data transfer, link 10 Gbps
	Green
	Link 1 Gbps
	Green, blinking
	Data transfer, link 1 Gbps

Hardware	
Power supply	Internal power supply unit (100–240 V, 50–60 Hz, 1 A max.)
Power consumption	Max. 30 W
Environment	Temperature range 0–40° C; humidity 10–90 %, non-condensing
Housing	Robust metal housing, 1 HU with removable mounting brackets for 19" installation, 442 × 44 × 211 mm (W x H x D)
Number of fans	1
Interfaces	
ETH	24 TP Ethernet ports 10 / 100 / 1000 Mbps
SFP+	2 SFP+ ports 1 / 10 Gbps
	26 concurrent ports in total
Package Content	
Mounting brackets	2 19" brackets for rack mounting
Cable	1 IEC power cord 230 V, 1 serial configuration cable 1.5 m

Hereby, LANCOM Systems GmbH | Adenauerstrasse 20/B2 | D-52146 Wuerselen, declares that this device is in compliance with Directives 2014/30/EU, 2014/35/EU, 2011/65/EU, and Regulation (EC) No. 1907/2006. The full text of the EU Declaration of Conformity is available at the following Internet address: www.lancom-systems.com/doc