
EX-1328

USB 3.0



Anwendungen / Application

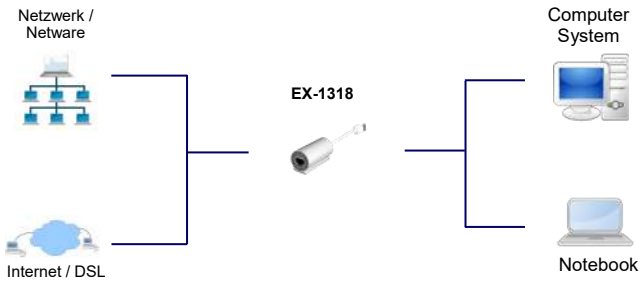

USB 3.0 zu Ethernet 1Gigabit LAN inkl. Adapter A-Buchse auf C-Stecker

Beschreibung

Mit der EX-1328 können Sie Notebook und Desktop Rechner über den USB 3.0 mit A– oder C -Buchsen Ausgang, in ein 10/100 oder 1000Mbps Netzwerk einbinden. Die EX-1328 kann gleichzeitig zu einer bestehender Netzwerkkarte installiert werden. Die Installation ist sehr einfach ohne das die Systeme geöffnet werden müssen. Die EX-1328 hat ein elegantes runddes Gehäuse und wird mit dem Adapter A-Buchse auf C-Stecker (EX-47990) mitgeliefert.

Merkmale

- Konform mit Universal Serial BUS 3.1 Gen 1
- Unterstützt Full Duplex Betrieb mit IEEE 802.3x Flow Control und Half Duplex Betrieb mit Retour Belastung Flow Control
- Kompatibel mit IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Unterstützt IEEE 802.3az (Energy Efficient Ethernet)
- Unterstützt Crossover Erkennung und Auto-Correction
- Stromversorgung vom USB-Bus (Bus-Power)
- Unterstützt „Wake-on-LAN“
- LED Anzeige für Power und Ethernet Verbindung

Spezifikationen

• **Chip-Set:**	ASIX AX88179
• **Datentransfer-Rate:**	USB 3.0: bis 5Gbps Netzwerk: 10/100/1000MBit/Sek.
• **Anschlüsse**:	1 x USB A-Stecker + Adapter A-Buchse auf C-Stecker 1 x RJ-45
• **Hardwaresysteme:**	USB 3.0
• **Treiber:**	Windows XP/Vista/7/8/8.1/10 (32/64-Bit), Windows Embedded Compact 7 (CE 7.0/6.0/5.0) Linux 2.6.x oder höher, MAC OS 10.x (10.6 bis 10.11)
• **Betriebstemperatur :**	0°C bis 550°C Celsius
• **Lagertemperatur:**	-40°C bis 75°C Celsius
• **Rel. Luftfeuchtigkeit:**	5% bis 95%
• **Abmessung Länge:** **Durchmesser:**	60 mm 30 mm
• **Kabellänge:**	11,5 cm
• **Gewicht**:	200g
• **Lieferumfang**:	EX-1328, Treiber CD, Handbuch

USB 3.0 to Ethernet 1Gigabit LAN incl. adapter A-female to C-male

Description

With the EX-1328 you can connect your notebook or desktop computer via the USB 3.0 with A – or C-female port to a 10/100or 1000Mbps network. The EX-1328 can be installed in the same time with an existing network card. The installation is very easy and it is not necessary to open the system. The EX-1328 has a elegant round case a we include our adapter EX-47990 with A-female to C-male connector

Features

- Compliant with Universal Serial Bus 3.1 Gen 1
- Supports full duplex operation with IEEE 802.3x flow control and half duplex operation with back-pressure flow control
- Compatible with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Supports IEEE 802.3az (Energy Efficient Ethernet)
- Supports crossover detection and auto-correction
- Power from the USB port (Bus-Power)
- Supports Wake-on-LAN
- LEDs indicate the status of Power status and Ethernet connection

Specification

• **Chip-Set:**	ASIX AX88179
• **Data transfer rate:**	USB 3.0: up to 5Gbps Network: 10/100/1000MBit/Sec.
• **Connectors**:	1 x USB A-male + adapter A-female to C-male connector 1 x RJ-45
• **Hardware system:**	USB 3.0
• **Driver:**	Windows XP/Vista/7/8/8.1/10 (32/64-Bit), Windows Embedded Compact 7 (CE 7.0/6.0/5.0) Linux 2.6.x or higher, MAC OS 10.x (10.6 to 10.11)
• **Operating Temperature :**	32°F up to 131° Fahrenheit
• **Storage Temperature:**	-40°F up to 167° Fahrenheit
• **Rel. Humidity:**	5% to 95%
• **Size length:** **Diameter:**	60 mm 30 mm
• **Cable length:**	11,5 cm
• **Weight**:	200g
• **Packaging contents**:	EX-1328, Driver CD, Manual

System / OS

Geprüft / Approved

Verpackung / Packaging





