



AX3000 Wi-Fi 6 Bluetooth 5.0 PCIe Adapter


Arm Your PC with Next-Gen
Wi-Fi Technology



Archer TX50E

 Unrivaled Dual-Band Speed
2402 Mbps+574 Mbps[†]

 75% Ultra-Low Latency Brings
Smoother Experience*


 Intel® Wi-Fi 6 Chipset for
Reliable Connections

 Wider Signal Coverage with
Magnetized Antenna Base

Highlights


Next-Gen Wi-Fi Technology

Powerful and consistent signals to perfectly pair with Wi-Fi 6 routers supported 160 MHz bandwidth.[§]

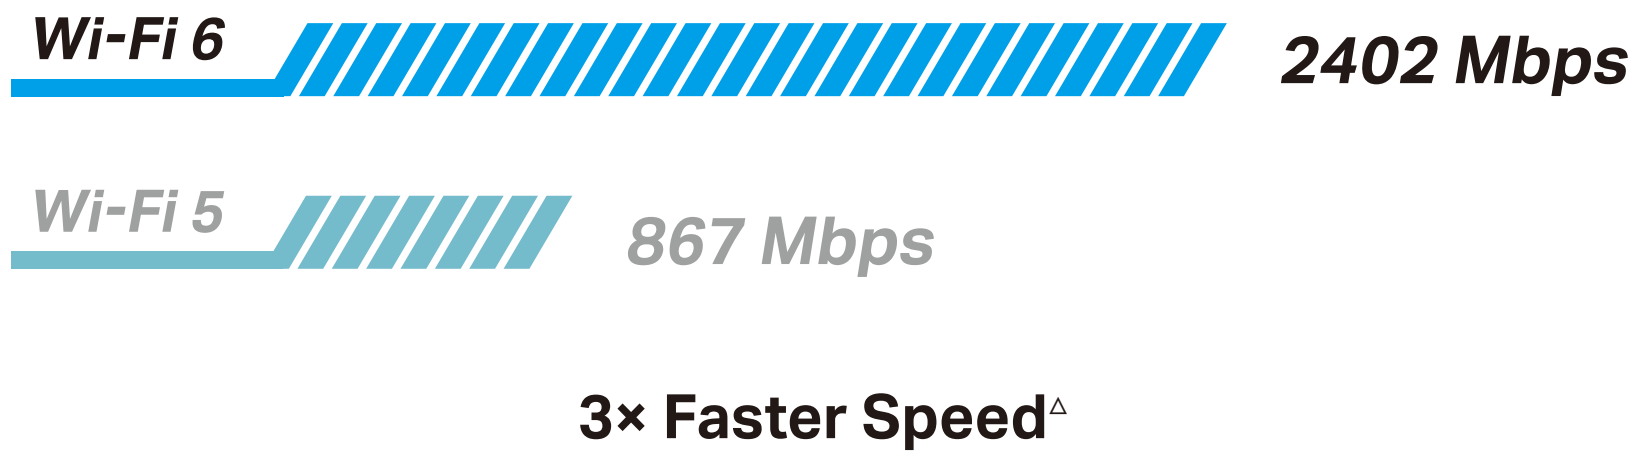

Bluetooth 5.0 Technology

Archer TX50E is compatible with the latest Bluetooth 5.0 Technology, achieving 2x faster speed and 4x broader coverage than Bluetooth 4.2 to connect as more devices as you want and enjoy the smoother experience than ever.^{***}

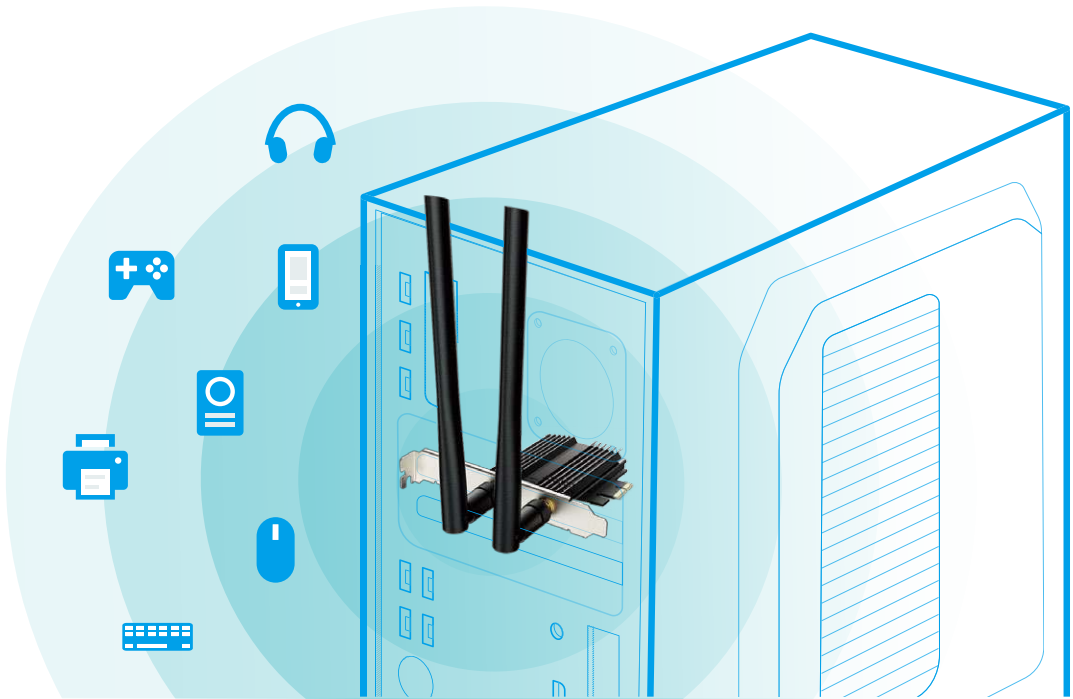

Highlights



75% Lower Latency

More responsive gaming and seamless video conferencing.*




Superior Wi-Fi Reception

Equipped with 1024-QAM and MU-MIMO technology, TX50E delivers faster and clearer Wi-Fi to take your PC's Wi-Fi reception to the next level.†



Improved Security—WPA3™

The latest security enhancements provide enhanced protection in personal password safety.**



Low-Profile Bracket

In addition to the standard bracket, a low-profile bracket is also provided for mini tower computer cases.

Specifications

WLAN Features

· Wireless Standards: IEEE 802.11ax/ac/n/a 5 GHz, IEEE 802.11ax/n/g/b 2.4 GHz	11n HT40: -74.5dBm
· Signal Rate:	11n HT20: -77.5dBm
5 GHz	11a 54Mbps: -77.75dBm
11ax: Up to 2402 Mbps(dynamic)	11a 6Mbps: -94.5dBm
11ac: Up to 1733 Mbps(dynamic)	2.4GHz :
11n: Up to 300 Mbps(dynamic)	11ax HT40: -60.75dBm
11a: Up to 54 Mbps(dynamic)	11ax HT20: -63.75dBm
2.4 GHz	11n HT40: -73dBm
11ax: Up to 574 Mbps(dynamic)	11n HT20: -76.25dBm
11n: Up to 300 Mbps(dynamic)	11g 54Mbps: -76.5dBm
11g: Up to 54 Mbps(dynamic)	11b 11Mbps: -89dBm
11b: Up to 11 Mbps(dynamic)	· Transmit Power:
· Reception Sensitivity:	5 GHz: 28dBm(FCC) / 23dBm(CE) (EIRP),
5 GHz :	2.4 GHz : 24dBm(FCC) / 20dBm(CE) (EIRP)
11ax HT160: -56.25dBm	· Wireless Modes: Infrastructure mode
11ax HT80: -59dBm	· Interface: PCI Express x1/x4/x8
11ax HT40: -62.25dBm	· Wireless Security: Support 64/128 bit WEP, WPA/WAP2/WPA3,
11ax HT20: -65dBm	WPA-PSK/WPA2-PSK, 802.1x
11ac HT160: -62dBm	· Modulation Technology: DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM,
11ac HT80: -65.5dBm	256-QAM, 1024QAM
11ac HT40: -69.75dBm	
11ac HT20: -73.75dBm	

Specifications

Bluetooth Features

- Standards and Protocols: Bluetooth 5.0, Bluetooth 4.2, Bluetooth 4.0
- Interface: USB 2.0
- Bluetooth Profiles: Archer TX50E supports the native BT profiles implemented in Windows 10.

* For the latest information on Windows 10 BT profiles, please refer to <https://support.microsoft.com/en-us/help/10568/windows-10-supported-bluetooth-profiles>

Hardware

- Chipset: Intel Wi-Fi 6 Chipset
- Antennas: Two High-Gain Dual Band Antennas
- Dimensions: 3.7 × 4.8 × 0.8 in (95.2 ×120.8 ×21.5 mm)

Others

- Package Contents
 - AX3000 Wi-Fi 6 Bluetooth 5.0 PCIe Adapter
 - Archer TX50E
 - Two 5 dBi High Gain Antennas
 - Low-Profile Bracket
 - Bluetooth Header Cable
 - Quick Installation Guide
 - Resource CD
- Certification
 - FCC, CE, RoHS
- System Requirements
 - Windows 10 (64-bit) only****
- Environment
 - Operating Temperature: 0°C~40°C (32°F ~104°F)
 - Storage Temperature: -40°C~70°C (-40°F ~158°F)
 - Operating Humidity: 10%~90% non-condensing
 - Storage Humidity: 5%~90% non-condensing



For more information, please visit https://www.tp-link.com/products/details/?model=Archer+TX50E_V1 or scan the QR code left

Attention: This device may only be used indoors in all EU member states and EFTA countries.
Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2020 TP-Link Technologies Co., Ltd. All rights reserved.
†Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage, and number of connected devices are not guaranteed and will vary as a result of network conditions, AP limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and AP location.
‡Use of Wi-Fi 6 (802.11ax), and features including OFDMA, MU-MIMO, HT160 and 1024-QAM require APs to also support the corresponding features.
§Functionality of Archer TX50E may be restricted on some computing systems and platforms. Please try to update the device's driver for feature compatibility.
^802.11ax 2x2 160 MHz enables 2402 Mbps maximum theoretical data rates, 3x faster than standard 802.11ac 2x2 80 MHz (867 Mbps) and nearly 6x faster than baseline 1x1ac (433 Mbps) Wi-Fi as documented in IEEE 802.11 wireless standard specifications, and require the use of similarly configured 802.11ax wireless network routers.
**"Up to 75% lower latency" is based on Intel simulation data of 802.11ax with and without OFDMA using 9 clients. Average latency without OFDM is 36ms, with OFDMA average latency is reduced to 7.6ms. Latency improvement requires that the AP and all clients support OFDMA.
***Use of WPA3™ requires APs to also support the corresponding feature.
****Several new features are introduced in the Bluetooth Core Specification 5.0 Release, including 2x faster speed and 4x broader coverage compared with Bluetooth 4.2.