

Dell Full-Size Wireless Mouse MS300

User's Guide

Mouse Models: MS300
Regulatory Model: MS3121Wt/SD-8160
MS3121Wp/DGRFEO



Notes, Cautions, and Warnings



NOTE: A NOTE indicates important information that helps you make better use of your computer.



CAUTION: A CAUTION indicates potential damage to hardware or loss of data if instructions are not followed.



WARNING: A WARNING indicates a potential for property damage, personal injury, or death.

© 2022 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.


2022-06

Rev. A00


Contents

- Notes, Cautions, and Warnings..... 2
- What’s in the box 4
- Mouse Features..... 5
- Dell Peripheral Manager 6
- Setting up your wireless mouse 7
- Pairing your wireless mouse..... 14
 - Pairing your mouse using the USB dongle..... 14
- Mouse Specifications 12
 - General..... 12
 - Electrical 12
 - Physical characteristics 12
 - Environmental..... 13
 - Wireless..... 13
- Troubleshooting..... 14
- Statutory Information..... 16
 - Warranty 16
 - Limited warranty and return policies 16
 - For U.S. customers: 16
 - For European, Middle Eastern and African customers: 16
 - For non-U.S. customers: 16


What's in the box




1 Mouse



2 USB dongle




3 Battery (AA-type)



4 Documents


Mouse Features

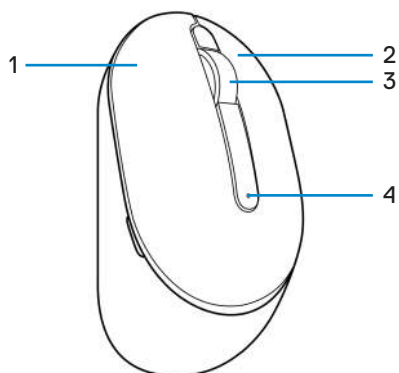

1 Left button

3 Scroll wheel

5 Optical sensor

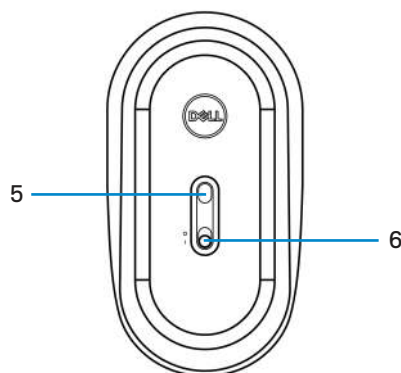

2 Right button

4 Battery-status light

6 Power switch

Dell Peripheral Manager


Dell Peripheral Manager software enables you to perform the following:

- View device information such as firmware version and battery status through the Info tab.
- Upgrade the latest firmware updates on your devices.


For more information on using Dell Peripheral Manager, search about it in the Knowledge Base Resource at **www.dell.com/support**.

Setting up your wireless mouse


- 1 Locate the slot on the side of the mouse cover. Using your fingertip, pry open the mouse cover.

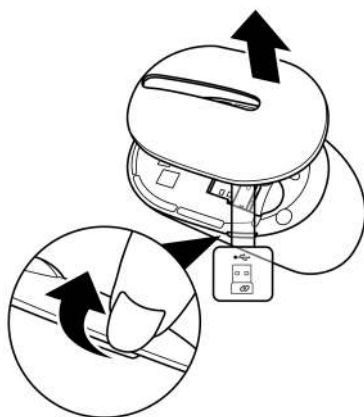


- 2 Remove the USB dongle from its compartment.

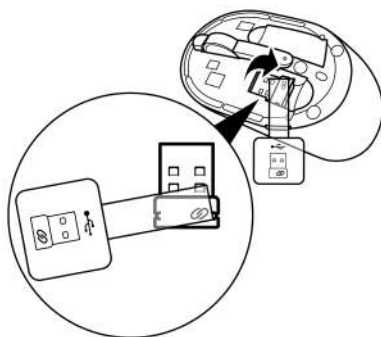


3 Install the AA battery into the battery compartment.

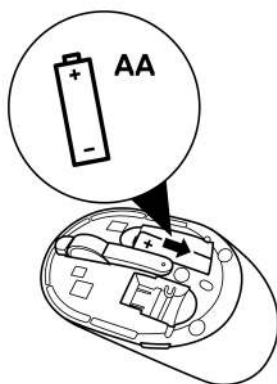

4 Replace the mouse cover.



5 Slide the power switch to turn on the mouse.




Pairing your wireless mouse

Your Dell wireless mouse can be paired with devices using the USB dongle. You can pair and switch between a laptop, desktop, or any compatible mobile device.


Pairing your mouse using the USB dongle

 **NOTE:** The following procedure describes how to connect your mouse to your computer with the USB dongle. You can also connect it using Dell Peripheral Manager.


- 1 Detach the dongle tag from the USB dongle.
- 2 Connect the USB dongle to the USB port on your computer.

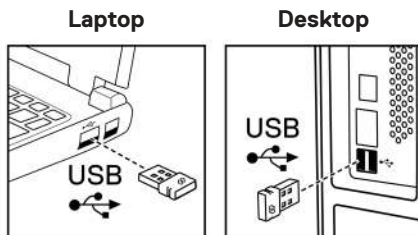

- 3 Slide the power switch to turn on the mouse.



The mouse is paired with your computer.

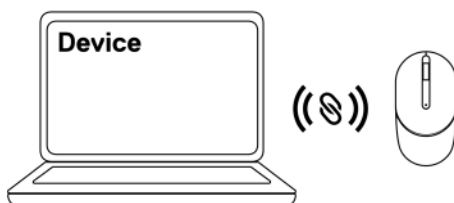

 **NOTE:** While operating the mouse, ensure that the distance between your computer and mouse is within 0.5 m (1.64 ft).

Mouse Specifications

General

Model number	MS300
Connection type	Wireless (2.4 GHz with nano dongle)
System requirement	• Windows Server 2012; 2012 R2, 2016 (RF dongle only) • Windows 8, 32/64-bit • Windows 10, 32/64-bit • Windows 11 • Android • Chrome • Linux 6.x, Ubuntu • Free-DOS (RF dongle only)

Electrical

Operating voltage	1.6 V ~ 0.9 V
Battery life	Approximately 36 months
Battery type	AA battery (2850 mAh)

Physical characteristics

Weight (with battery)	92 g (0.21 lb)
Weight (without battery)	65 g (0.15 lb)
Dimensions:	
Length	115 mm (4.52 in.)
Width	62 mm (2.44 in.)
Height	39 mm (1.53 in.)

Environmental

Temperature:

Operating -10°C to 50°C (14°F to 122°F)

Storage -40°C to 65°C (-40°F to 149°F)

Storage humidity 95% maximum relative humidity;
non-condensing

Wireless

RF protocol 2.4 GHz RF

Range Up to 10 m (32.8 ft) radio range.
No performance degradation up to
maximum radio range.

Troubleshooting

Problems	Possible solutions
Unable to pair mouse and computer/mouse is not functioning	1 Check if the batteries are inserted in the correct orientation. The batteries “+” and “-” ends should be placed as indicated on the battery compartment. 2 Check the battery level. • If the device uses the rechargeable batteries, ensure that the batteries are fully charged. • If the batteries are exhausted, replace them with a new ones. 3 Turn off the device, and then turn it on. Check if the battery-status light is flashing amber 10 times, indicating that the battery power is low. If the batteries are fully depleted, the battery-status light will not turn on. 4 Restart your computer. 5 Ensure that the USB dongle is directly connected to your computer. • Avoid using the port replicators, USB hubs, and so on. • Change the USB port. 6 Ensure that the distance between your computer and keyboard/mouse is within 0.5 meters (1.64 feet).

Problems	Possible solutions
Mouse pointer does not move/ Mouse buttons do not work/Wireless connection is lost	1 Check the battery level. • If the device uses the rechargeable batteries, ensure that the batteries are fully charged. • If the batteries are exhausted, replace them with a new ones. 2 Turn off the device, and then turn it on. Check if the battery-status light is flashing amber 10 times, indicating that the battery power is low. If the batteries are fully depleted, the battery-status light will not turn on. 3 Restart your computer. 4 Ensure that the distance between your computer and keyboard/mouse is within 0.5 meters (1.64 feet).
Keyboard buttons do not work	
Wireless connection is lost	
slow moving cursor	

Statutory Information

Warranty

Limited warranty and return policies

Dell-branded products carry a three-year limited hardware warranty. If purchased together with Dell system, it will follow the system warranty.

For U.S. customers:

This purchase and your use of this product are subject to Dell's end user agreement, which you can find at [Dell.com/terms](https://www.dell.com/terms). This document contains a binding arbitration clause.

For European, Middle Eastern and African customers:

Dell-branded products that are sold and used are subject to applicable national consumer legal rights, the terms of any retailer sale agreement that you have entered into (which will apply between you and the retailer) and Dell's end user contract terms.

Dell may also provide an additional hardware warranty – full details of the Dell end user contract and warranty terms can be found by going to [Dell.com/terms](https://www.dell.com/terms), selecting your country from the list at the bottom of the “home” page and then clicking the “terms and conditions” link for the end user terms or the “support” link for the warranty terms.

For non-U.S. customers:

Dell-branded products that are sold and used are subject to applicable national consumer legal rights, the terms of any retailer sale agreement that you have entered into (which will apply between you and the retailer) and Dell's warranty terms. Dell may also provide an additional hardware warranty – full details of Dell's warranty terms can be found by going to [Dell.com](https://www.dell.com), selecting your country from the list at the bottom of the “home” page and then clicking the “terms and conditions” link or the “support” link for the warranty terms.