



newline

Quick Start

Newline Click2Cast

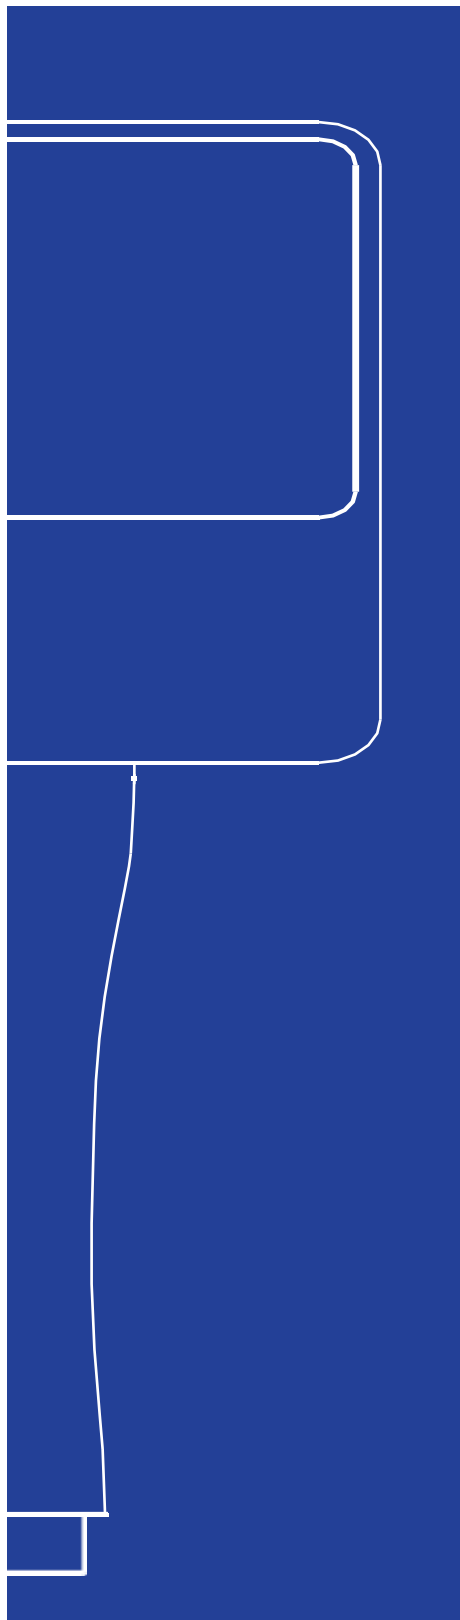

1. Appearance

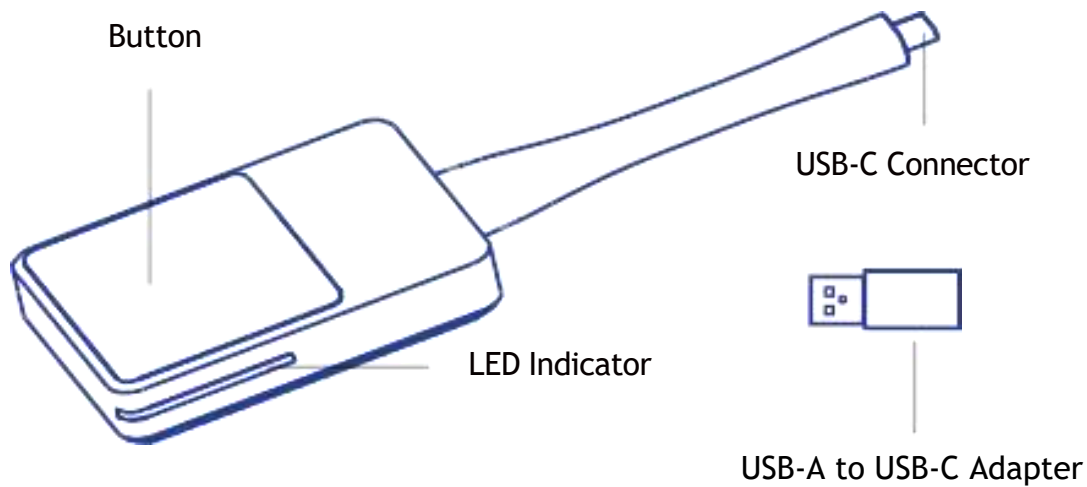

- **Type-C Connector** - Used to connect Newline Click2Cast Button to a large display or PC.
- **Button** -Used to start or stop video/audio sharing from the PC to the large display.
- **USB to USB-C Adapter** - Used to connect and pair with a large display without USB-C interface.
- **LED Indicator**

Indicator	Button Status
Off	Not inserted into any PC or endpoints.
Blinking green	Pairing or connecting to the large display.
Solid green	Ready for screen sharing.
Solid blue	Pairing complete or sharing screen.
Blinking red	Failed to pair or connect to the large display.
Blinking yellow	The Newline Click2Cast button is upgrading.

2. Pairing

REQUIREMENT : Newline Cast+ is installed and activated on the large display. You can pair the Newline Click2Cast Button with the large display in the following ways.

I. Automatic paring

Be sure that the Wi-Fi hotspot is enabled on the display, launch Newline Cast+, plug Newline Click2Cast Button into the USB-A/USB-C port of the display, wait for the pairing complete message to appear on the screen, then unplug it.

II. Manual paring

If the Wi-Fi hotspot is not available on your display, please launch Newline Cast+, plug Newline Click2Cast Button into the USB-A/USB-C port of the display, a manual pairing window will pop up, enter the Wi-Fi SSID and password, then tap OK to complete the pairing.

3. Share Screen

- I. Plug the Newline Click2Cast Button into the laptop via Type-C port and wait for LED from blinking to solid blue. Tap the button to start screen sharing.

II. Extend display mode

For Windows, press “Win+P” to switch the display mode to PC screen only, Duplicate, Extend, Second screen only.

For macOS, launch System Preferences > Displays > Select BYOM 4K, choose the projection mode according to your needs, e.g. as Separate Display, Mirror Built-in Retina Display.

4. BYOM (Bring Your Own Meeting)

REQUIREMENT: Microphone, camera, and speaker are available on your display.

Guides to use BYOM:

- I. Plug the Newline Click2Cast Button into the laptop and wait for LED from blinking to Solid blue.
- II. Use video conferencing software (such as Zoom/ Teams/Skype/Google Meet...) to join /host a meeting, and choose BYOM camera, BYOM microphone, BYOM speaker, you will be able to directly use the A/V equipments on the large display to conduct video conferences.

5. Cautions

- I. Please ensure Newline Click2Cast has been activated on the display. If not, the Newline Click2Cast Button will not work.
- II. The 2.4Ghz Wi-Fi frequency band is susceptible to interference from surrounding electronic devices, resulting in bad network quality and affecting user experience. Please use the Wi-Fi signal working at the 5Ghz channels for a good user experience.

6. Specifications

Item	Specifications
Power supply	5V DC from USB-C
Power consumption	3W(Typical)
Ambient temperature	• Operating: 0°C~40°C • Storage: -15°C~+60°C
Relative humidity (non-condensing)	• Operating: 5%~95% • Storage: 0%~95%
Package dimensions (H x W x D)	213mm×100mm×30.3mm
Product dimensions (H x W x D)	175mm×58mm×16.5mm
Gross weight	196.5g
Net weight	80g
Wi-Fi	2.4GHz and 5GHz
Wi-Fi operating frequency bands	2412MHz~2472MHz 5180MHz~5240MHz

Maximum Wi-Fi power	1.6m W/MHz
Actual Wi-Fi power	2.4GHz : 1.6mW/MHz, 5GHz : 0.7mW/MHz
Resolution	FHD (60 fps), 4K (30 fps)
OS	Windows 7/8/10/11 macOS, Chrome OS, Linux OS, Android OS, Any device supports full featured Type-C (DP Alt mode)

 Note: The actual power of Wi-Fi is measured data, and the test results of different laboratories may vary.