MAXIFY BX110 with battery

PRINT ON THE GO, WHEREVER YOU ARE





Stay on task with a rechargeable battery. Take control with wireless printing from a PC, laptop or smart device and print text or borderless photos up to A4. For fast results, save up to 5 templates and print at the touch of a button.



USB charge



Rechargeable battery



Tablet and smartphone ready



Connected



Wireless Direct




1.44" OLED screen





Canon

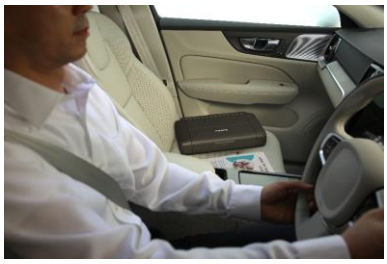

Print on the road

Sleek and robust for easy transport, print up to 330 pages from a new battery's full charge[1] and top up in the office, at home or on the move via a USB Type C cable.



Couple up with easy connectivity

Link up with Wireless Connect and control via the Canon PRINT app, AirPrint (iOS), Mopria®[4] (Android) or Windows 10 Mobile. No internet router? Tap into Wireless Direct.



Look sharp with superb quality

Get crisp prints with superb quality in darker areas. Hybrid ink with a dedicated pigment black ink creates sharp text while dye-based colours give vivid prints with up to 100 years of album life[2].



Keep it simple

Print and check ink and connection status via the 1.44" OLED screen and work quietly and quickly with print speeds of 5.5ipm colour and 9ipm mono[3].



Custom fit

Save time with quick-fire printing. Store up to 5 custom templates to print contracts and forms straight from the printer without a PC, laptop or smart device.

PRODUCT RANGE



Canon MAXIFY BX110 with battery

[1]Printed via USB connection without Wi-Fi connection
[2]Based on accelerated testing by Canon in dark storage under controlled temperature, humidity and gas conditions, simulating storage in an album with plastic sleeves. Canon cannot guarantee the longevity of prints; results may vary depending on printed image, drying time, display/storage conditions, and environmental factors
[3]Document print speeds are the averages of ESAT (Word, Excel, PDF) in Office Category Test for the default simplex mode, ISO/IEC 24734.Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc
[4]The Mopria® wordmark and the Mopria® Logo are registered and/or unregistered trademarks of Mopria Alliance, Inc. in the United States and Logo use is strictly prohibited
[5]5GHz subject to availability in your region

TECHNICAL SPECIFICATIONS

MAXIFY BX110 with battery

GENERAL SPECIFICATIONS	
Model Numbers	MAXIFY BX110 with battery
PRINTER SPECIFICATIONS	
Print Resolution	Up to 4800 x 1200 dpi [1]
Print Technology	2 ink cartridges: Black (Pigment BK) and Colour (BK, C, M, Y) Inkjet FINE print head ChromaLife100 System
Mono Print Speed	Approx. 9.0 ipm [2]
Colour Print Speed	Approx. 5.5 ipm [2]
Photo Print Speed	Borderless 10x15cm : Approx. 53 seconds [3]
Borderless Printing	Yes (A4, LTR, 4"x6",5"x7",7"x10", 8"x10", Card Size (91 x 55mm), Square (5" x 5", 3.5" x 3.5") [4]
Two Sided Printing	Manual operation
CARTRIDGES AND YIELDS	
Standard Ink Cartridges	PGI-35 Black CLI-36 Color
Cartridge Yield (Plain Paper)	A4 Colour Document [5] PGI-35 Pigment Black: 200 pages CLI-36 Colour: 260 pages
Cartridge Yield (Photo)	10x15cm photo [6] CLI-36 Colour: 102 photos
PAPER SUPPORT	
Paper Types	Plain Paper (64 g/m2 - 105 g/m2) Canon Oce Red Label Paper(WOP111) Canon Oce Office Colour Paper(SAT213) Canon High Resolution Paper (HR-101N) Canon Plus Glossy II (PP-201) Canon "Everyday Use" (GP-501) Canon Matte (MP-101) Canon Double Sided Matte (MP-101D) Envelopes Greeting Card (manufactured by Avery and RedRiverPaper) Removable Photo Stickers (RP-101) Magnetic Photo Paper (MG-101)
Maximum Paper Input	Rear Tray: Max. 50 sheets (plain paper)
Paper Sizes	Rear Tray: A4, A5, B5, LTR, LGL, Envelopes (DL, COM10), Square (5"x5", 3.5"x3.5"), Card Size (91 x 55 mm), 4"x6", 5"x7",7"x10", 8"x10" [Custom size] width 55 mm - 215.9 mm, length 89 mm - 676 mm
Paper Weight	Rear Tray: Plain paper: 64 - 105 g/m² Canon specialty paper: max paper weight : approx. 275 g/m2 (Photo Paper Plus Glossy II PP-201)
INTERFACE	
Display Type & Size	1.44"/3.6cm OLED Display (Monochrome)
Display Languages	33 Languages Selectable:Japanese/English (mm &inch)/German/French/Italian/Spanish/BR Portuguese/Dutch/Danish/Norwegian/Swedish/ Finnish/Russian/Ukrainian/Polish/Czech/Slovenian/ Hungarian/Slovakian/Croatian/Romanian/Bulgarian/ Turkey/Greek/Estonian/Latvian/Lithuanian/Simplified Chinese/Korean/Traditional Chinese/Thai/Indonesia/Vietnamese
CONNECTIVITY	
Wireless LAN	Communication Protocol: SNMP/ HTTP/TCP/IP (IPv4/IPv6) TLS 1.3/1.2/1.1/1.0 Supported Standards: IEEE802.11n / IEEE802.11g / IEEE802.11b / IEEE802.11a / IEEE802.11ac [7] Frequency Bandwidth: 2.4GHz / 5GHz Range: Indoor 50 m ※depends on the transmission speed and conditions Security: WPA-PSK(AES) WPA2-PSK(AES) WPA3-SAE(AES) WPA-EAP(AES)* WPA2-EAP(AES)* WPA3-EAP(AES)*

* IEEE802.1X(EAP-TLS/EAP-TTLS/PEAP) available

Interface	Hi-Speed USB (USB Type C)
Mobile Apps	Canon PRINT app [8] Easy-PhotoPrint Editor app [9]
Printer Features	Cloud Link (print only) [10] Apple AirPrint Canon Print Service Plugin (Android) [11] Mopria (Android) [12] Wireless Direct Connection 2.4GHz & 5 GHz [13]
Smart Assistant & Automation Support	Amazon Alexa™ [14]
SOFTWARE	
Supported Operating Systems	Windows 11, Windows 10, Windows 8.1, Windows 7 SP1 Operation can only be guaranteed on a PC with pre-installed operating system. Printer Driver and IJ Printer Assistant Tool support the following OS: Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019, Windows Server 2022 and Windows Server 2025. Display environment: XGA 1024 x 768 or more Mac: macOS Big Sur 11.7.6 - macOS Sequoia 15 Mobile Operating Systems: iOS®, iPadOS, Android™, Chrome OS [15]
Software Included	Printer Driver IJ Printer Assistant Tool Easy-PhotoPrint Editor (download) [16] Easy-Layout Editor (download)
PORTABLE BATTERY	
Type	Lithium-ion
Voltage Level	DC10.8V 2170mAh
Charging Time (hrs)	Approx. 2 hours 20 min (AC adaptor) Approx. 5hours（USB1.5A）
Remaining Indication	LED 4 steps
Printable Pages	approx. 330 sheets(USB connection to PC) [17]
PHYSICAL FEATURES	
Weight	Approx. 2.3 kg
Dimensions (W x D x H)	Approx. 322 x 210 x 66 mm with the trays retracted Approx. 322 x 307 x 245 mm with the trays extended
Acoustic Noise Levels	Approx. 40.5dB(A) (PC Print on Plain Paper) [18]
Recommended Operating Environment	Temperature: 5-35°C Humidity: 10-90%RH (no dew condensation)
Power Source	AC 100-240V, 50/60Hz
Power Consumption	Off: Approx. 0.15W Printing: Approx. 8W [19] Standby (USB connection to PC): Approx. 1.1W Standby (all ports connected): Approx. 1.6W* Time to enter Standby mode: 3 minutes 7 seconds* *<EU only - for ErP Lot 26 regulation>
Typical Electricity Consumption	0.24 kWh [20]

Canon

TECHNICAL SPECIFICATIONS

MAXIFY BX110 with battery

Footnotes

[1] Ink droplets can be placed with a minimum pitch of 1/4800 inch

[2] Document print speeds are the averages of ESAT (Word, Excel, PDF) in Office Category Test for the default simplex mode, ISO/IEC 24734. Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.

[3] Photo print speed is based on default driver setting using ISO/JIS-SCID N2 standard on Canon Photo Paper Plus Glossy II and does not take into account data processing time on host computer.

[4] Paper types NOT supported for borderless printing are as follows: Envelope, High Resolution Paper, T-Shirt Transfer, Photo Stickers

[5] Page Yield is the estimated value based on Canon individual test method using the ISO/IEC 24712 chart and continuous printing simulation with the replacement after initial setup.

[6] Page Yield is the estimated value based on Canon individual test method using the ISO/IEC 29103 chart and continuous printing simulation with the replacement after initial setup.

[7] Wireless printing requires a working network with wireless 802.11b/g/n/a/ac or a capability, operating at 2.4GHz or 5GHz. Wireless performance may vary based on terrain and distance between the printer and wireless network clients.
In some countries/regions, Wi-Fi 5GHz is not supported either infrastructure nor direct mode.

[8] Requires an Internet connection and the Canon PRINT app, available for free on the App Store and at Google Play. Compatible with iOS, iPadOS devices running iOS 16 or later, and Android mobile devices running Android 7 or later. Your device must be connected to the same working network with wireless 802.11 b/g/n/a/ac capability as your printer.

[9] The Easy-PhotoPrint Editor mobile application requires an Internet connection and the Easy-PhotoPrint Editor app v1.9.0, available for free on the App Store and at Google Play. Compatible with iOS and iPadOS devices running iOS 15 or later, and Android mobile devices running Android 7 or later. Certain exceptions may apply.

[10] Requires an Internet connection and the Canon PRINT app, available for free on the App Store and at Google Play. Compatible with iOS, iPadOS devices running iOS 16 or later, and Android mobile devices running Android 7 or later. Your device must be connected to the same working network with wireless 802.11 b/g/n/a/ac capability as your printer.

[11] Canon Print Service is a print plug-in for Android smart devices, which enables printing from Android 7 onwards devices to many Canon printers via a Wi-Fi network. The plug-in does not work as a standalone app. Available for free at Google Play.

[12] Requires Android mobile device with Android 4.4 operating system or later with the Mopria Print Service pre-loaded with that device and the compatible PIXMA printer on the same wireless network. The Mopria experience is also available on Android 4.4 mobile devices with a download of the Mopria Print Service from Google Play.

[13] In some countries/regions, Wi-Fi 5GHz is not supported either infrastructure nor direct mode.

[14] Requires an active smart assistant account linked and accompanying app enabled, the smart device and printer to be actively connected with permission to the Canon Inkjet Cloud Printing Center, and the required action(s), skill(s), or applet(s) available/enabled to the compatible printer. Voice commands can not be displayed as text on Amazon smart devices with screens. Only English, French and German supported.

[15] Some functions may not be available with these Operating Systems. Please refer to the manual or website for details.

[16] The Easy-PhotoPrint Editor software requires an Internet connection. The Easy-PhotoPrint Editor software v1.9.0 is compatible with the following operating systems; Microsoft Windows 11 (64-bit), Windows 10 (64-bit/32-bit), macOS High Sierra v10.13 onwards Minimum Windows and macOS/Mac OS X requirements are: 2GB of RAM and a monitor with 1024x768 resolution.

[17] Conditions: Tested under normal temperature and humidity, using fully-charged new battery, printing ISO/IEC 24712 files (5 patterns) continuously in color on A4 plain paper in Standard mode of printer driver.

[18] Acoustic Noise is measured based on ISO7779 standard with default setting.

[19] Print: When printing ISO/JIS-SCID N2 on A4 size plain paper using default settings. Specifications are subject to change without notice.

[20] Typical Electricity Consumption (TEC) value: TEC value was calculated assuming the unit will be constantly switched among operational mode, sleep mode, and power-off mode for 5 days, and that it will be either in sleep or power-off mode for the remaining 2 days within the same week. The TEC value of this product is calculated by Canon on their own accord using TEC measurement procedure regulated in International ENERGY STAR Program.

Standard disclaimers

All specifications subject to change without notice.
Print speed may vary depending on system configuration, interface, software, document complexity, print mode, page coverage, type of paper used etc.
Ink yield may vary depending on texts/photos printed, applications software used, print mode and type of paper used. For yield information see www.canon-europe.com/ink/yield
All brand and product names are trademarks of their respective companies.
Microsoft, Windows and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries.

Canon Inc.
canon.com
Canon Europe
canon-europe.com
English edition
Canon Europa NV 2025

PRINT ON THE GO, WHEREVER YOU ARE

MAXIFY BX110 with battery

Stay on task with a rechargeable battery. Take control with wireless printing from a PC, laptop or smart device and print text or borderless photos up to A4. For fast results, save up to 5 templates and print at the touch of a button.



Sales Start Date: April 2025

Product details

Product Name	Mercury Code	EAN Code
MAXIFY BX110 with battery EUR	7069C026AA	4549292245998
MAXIFY BX110 with battery MEA	7069C027AA	4549292246001

Canon

PRINT ON THE GO, WHEREVER YOU ARE

MAXIFY BX110 with battery

Stay on task with a rechargeable battery. Take control with wireless printing from a PC, laptop or smart device and print text or borderless photos up to A4. For fast results, save up to 5 templates and print at the touch of a button.



Measurement / logistic information

Product Name	Mercury Code	Pack Style	Quantity per pack	Length (mm)	Width (mm)	Height (mm)	Gross Weight (kg)	Net Weight (kg)
MAXIFY BX110 with battery EUR MAXIFY BX110 with battery MEA	7069C026AA 7069C027AA	Individual	1	1152	904	924	220.3	172.2
		Pallet (Upper)	18 (TBC)	1152	904	1228	292.2	229.6
		Pallet (Bottom)	18 (TBC)	1152	904	1228	292.2	229.6

Canon

PRINT ON THE GO, WHEREVER YOU ARE

MAXIFY BX110 with battery


Stay on task with a rechargeable battery. Take control with wireless printing from a PC, laptop or smart device and print text or borderless photos up to A4. For fast results, save up to 5 templates and print at the touch of a button.



What's in the box

MAXIFY BX110 with battery

- Canon MAXIFY BX110 with battery
- AC Adapter
- Power cord
- Ink Tanks: PGI-35 Pigment Black, CLI-36 CMYK Colour
- Print Head
- Set-up CD-ROM
- USB Type C cable
- LK-72 Rechargeable battery attachment
- Manuals and other documents

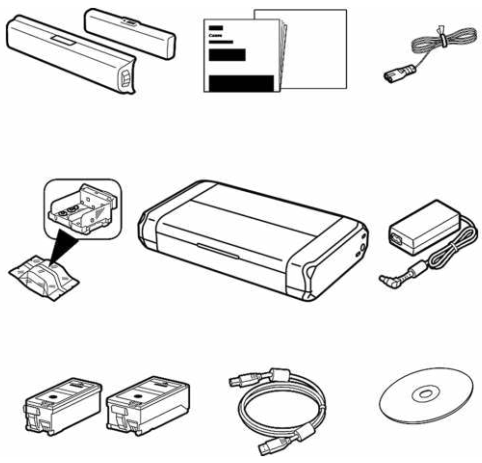

Canon