


Wired External Sounder


User Manual

EN 50131-1:2006 + A1:2009 + A2:2017 + A3:2020
EN 50131-4:2019
Security Grade 2
Environmental Class IV

User Manual Flow Chart

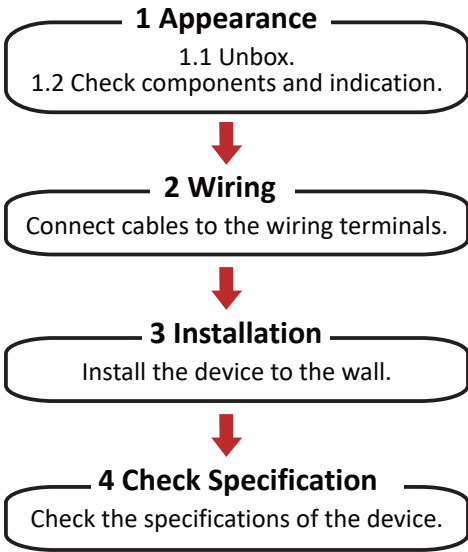

1 Appearance

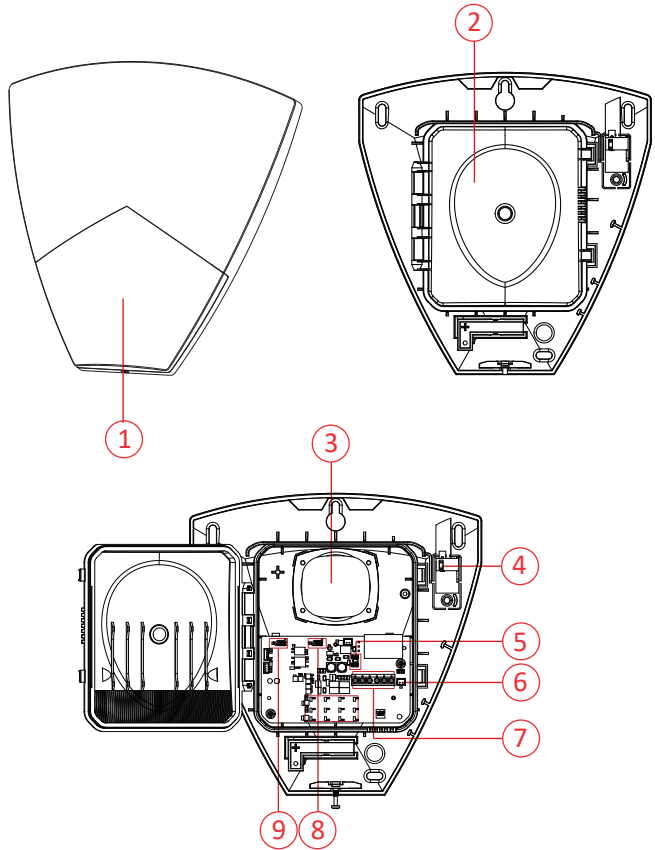

A Appearance Description


No.	Description
1	Strobe Light
2	Water-Proof Transparency Cover
3	Buzzer
4	Tamper
5	Strobe Light and Sounder Jumper Cap
6	Tamper Terminal
7	Wiring Terminal
8	Tone Mode Jumper Cap
9	Cut Off Mode Jumper Cap

B Buzzer Description


Buzzer Indication	Operation
Fire Alarm	Fire bell.
Medical Alarm	High and low frequency alternated impulsive sound.
Alarm	Rapid high frequency impulsive sound.

2 Wiring


Use a tool (drill) to dig a hole on the wiring hole area.
Make sure the hole's edge has no burrs.

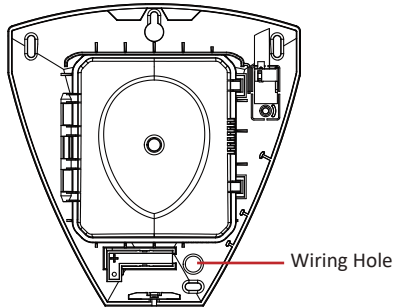


A Sounder Wiring

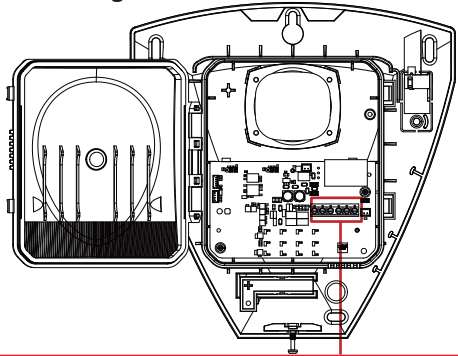


1 All Mode

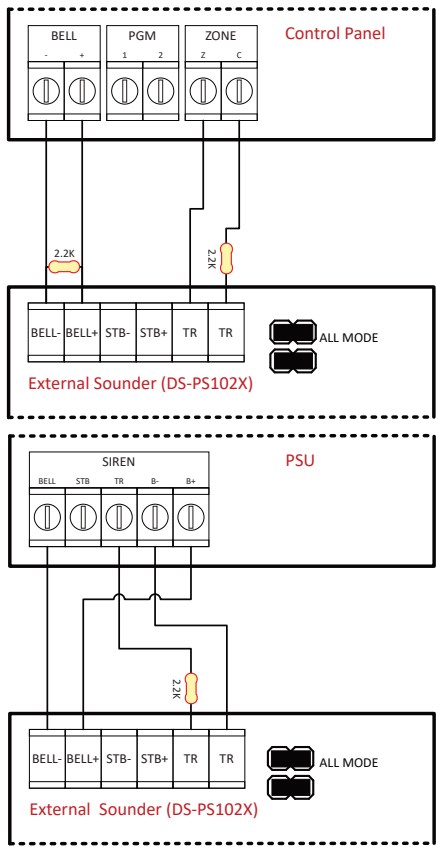


2 Negative Active Mode

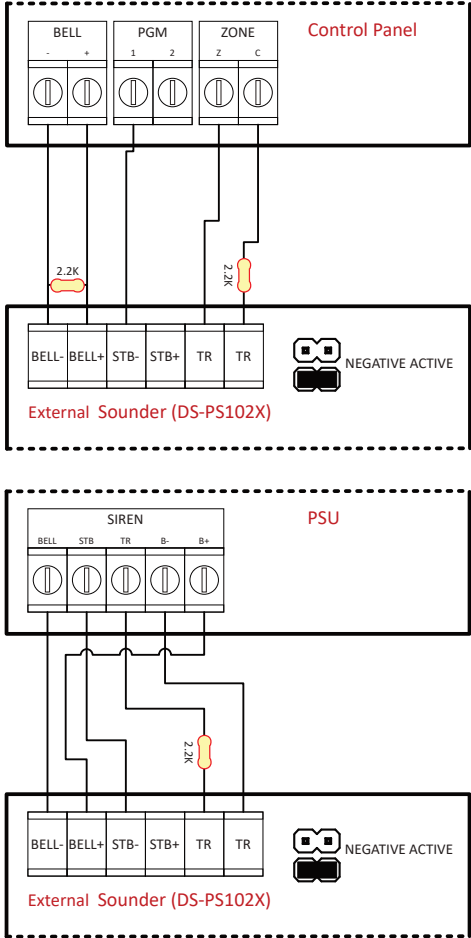

3 Positive Active Mode

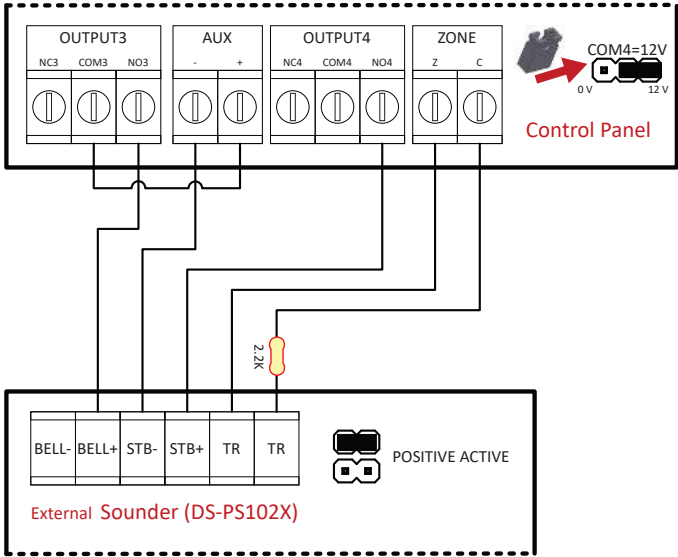


B Jumper Cap Descriptions

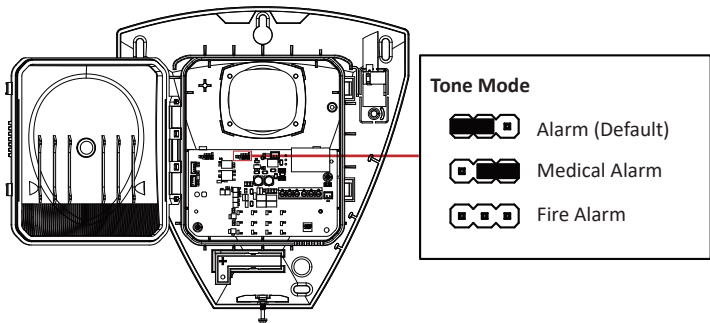


More Languages




UD37740B-A

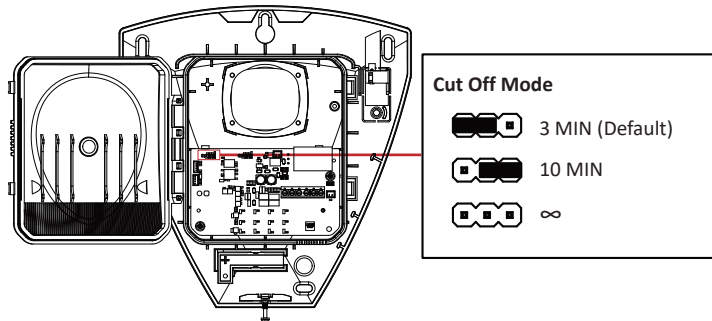


3 Installation

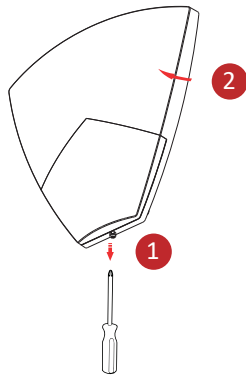

Step 1. Loosen the bottom screw.
Step 2. Remove the front cover.

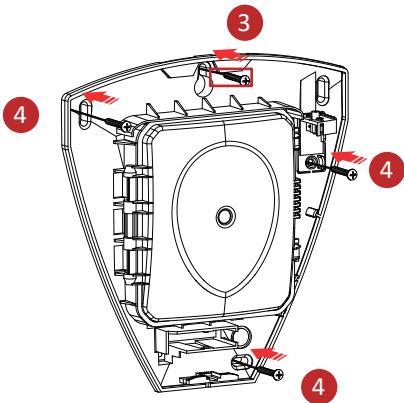

Step 3. Attach the device to the required place with the top screw. Make the device horizontal by resorting to the gradienter.
Step 4. Secure the siren with other three screws.



Step 5. Fix the front panel on the siren body. Tighten the set screw to complete the installation.

Specification			
Model		DS-PS102X/BLUE	DS-PS102X/RED
Indicator	Alarm light	1	
Interface	Buzzer	1 m, 110 dB (Max.) 30 cm, 120 dB (Max.)	
	Power interface	12 VDC, wide voltage input: 9 to 16V	
	Tamper	1 front cover and back-cover tamper	
	BELL interface	1	
	STROBE interface	1	
Others	Power supply	12 VDC, 180mA	
	Dimension (W × H × D)	150 mm × 115 mm × 28 mm	
	Color	Blue	Red
	Operation temperature	- 30 °C to 60 °C (-22 °F to 140 °F)	
	Operation humidity	10% to 90%	

About this Document

- This Document includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only.
- The information contained in the Document is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of the Document at the Hikvision website (<https://www.hikvision.com>). Unless otherwise agreed, Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as "Hikvision") makes no warranties, express or implied.
- Please use the Document with the guidance and assistance of professionals trained in supporting the Product.

About this Product

This product can only enjoy the after-sales service support in the country or region where the purchase is made.

Acknowledgment of Intellectual Property Rights

- Hikvision owns the copyrights and/or patents related to the technology embodied in the Products described in this Document, which may include licenses obtained from third parties.
- Any part of the Document, including text, pictures, graphics, etc., belongs to Hikvision. No part of this Document may be excerpted, copied, translated, or modified in whole or in part by any means without written permission.
- **HIKVISION** and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions.
- Other trademarks and logos mentioned are the properties of their respective owners.

LEGAL DISCLAIMER

- TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS DOCUMENT AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.
- YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.
- YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.
- IN THE EVENT OF ANY CONFLICTS BETWEEN THIS DOCUMENT AND THE APPLICABLE LAW, THE LATTER PREVAILS.

© Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.