




Bluetooth 4.0 Nano USB Adapter



UB400

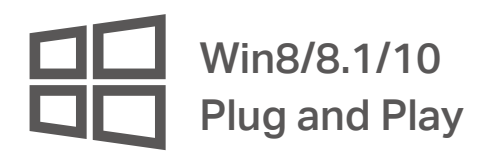

Highlights

Nano and Mighty

UB400 is highly portable and much smaller than a flash drive. Plug and play in Win8/8.1/10 systems to enjoy a wireless communication with Bluetooth-enabled devices.



Connect with Multiple Devices via Bluetooth 4.0

UB400 supports advanced Bluetooth 4.0 and enables wireless connectivity with a wide range of devices such as computers, printers, phones, headsets, speakers, keyboards, controllers, etc.



Features



Ease of Use

- Bluetooth 4.0 – Backward compatible with Bluetooth® 2.0/2.1/3.0
- Plug and Play – Plug and play in Win8/8.1/10 systems



Design

- Nano design – Small, unobtrusive design allows you to plug it in and forget it is even there



Reliability

- Versatile Wireless Connectivity – Enable wireless communication with Bluetooth-enabled computers, printers, phones, headsets, speakers, keyboards and more
- BLE Technology – Bluetooth Low Energy technology for energy-saving wireless connectivity



For more information, please visit
<https://www.tp-link.com/products/details/UB400.html>
or scan the QR code left

Specifications

Hardware

- Standard: Bluetooth 4.0
- Interface: USB 2.0
- Dimensions: 0.58 × 0.27 × 0.74 in (14.8 × 6.8 × 18.9 mm)

Others

- Package Contents
Bluetooth 4.0 Nano USB Adapter UB400
Quick Installation Guide
- Certification
FCC, CE, RoHS
- System Requirements
Windows 10/8.1/8/7/XP
- Environment
Operating Temperature: 0 °C ~40 °C (32 °F ~104 °F)
Storage Temperature: -40 °C ~70 °C (-40 °F ~158 °F)
Operating Humidity: 10%~90% non-condensing
Storage Humidity: 5%~90% non-condensing

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2019 TP-Link Technologies Co., Ltd. All rights reserved.
*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection quality, and client condition.