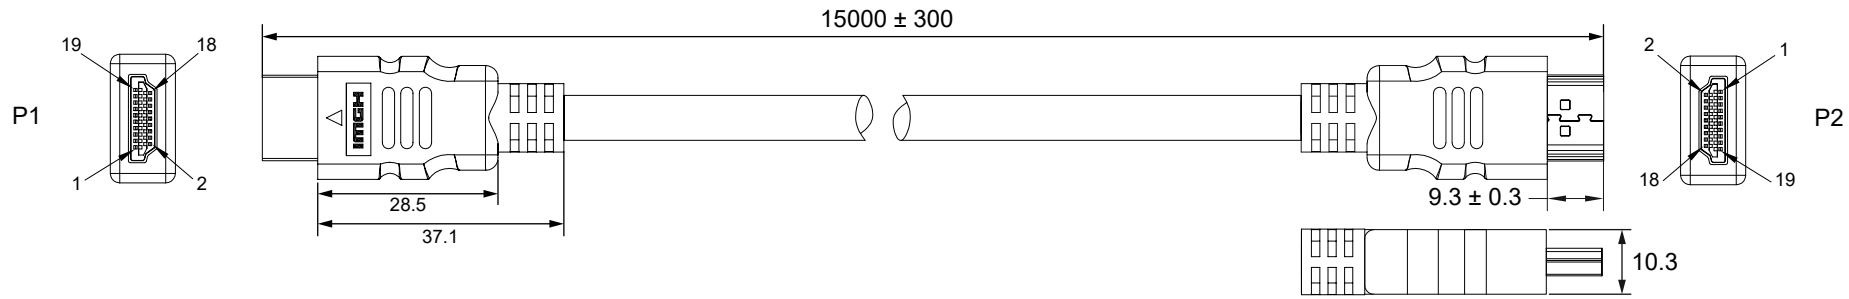

Pin-Belegung / *Pin Assignment*

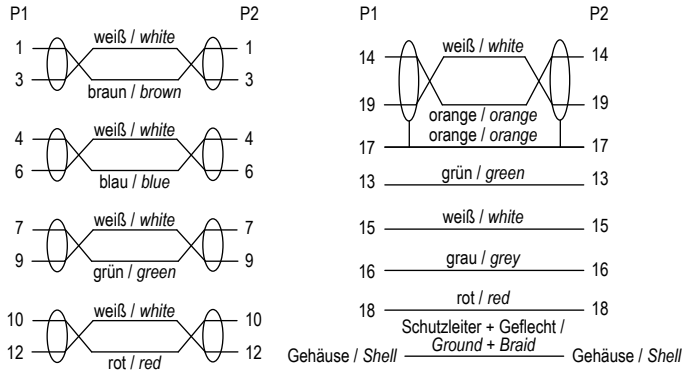

Aderquerschnitt / *Wire cross section*

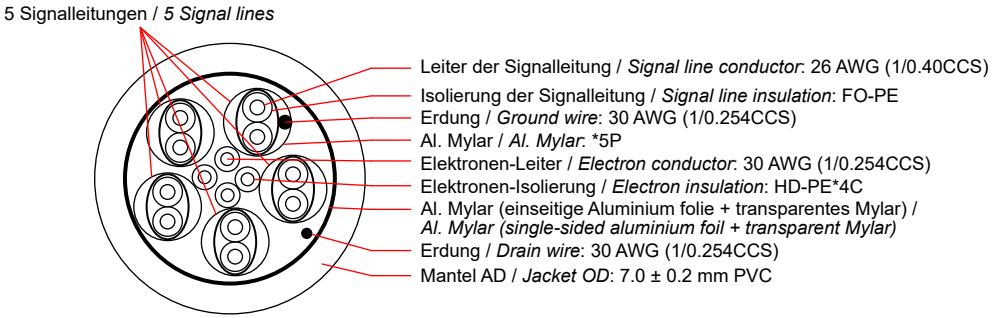

High Speed HDMI™-Kabel mit Ethernet

- hochauflösende Signalübertragung mit bis zu 4K @ 60 Hz (abwärtskompatibel)
- vergoldete HDMI™-Steckverbinder
- integrierter Ethernet-Kanal spart zusätzliche Netzwerk- oder Audiokabel

Anschlüsse:	2x HDMI™-Stecker (Typ A)
Kabeltyp:	Rundkabel
AWG:	26-30
Max. Auflösung:	4K Ultra HD 2160p (60 Hz)
Max. Übertragungsrate:	10,2 Gbit/s
Isolationswiderstand:	300 V ⎓, 10 MΩ min.
Kontaktwiderstand:	30 Ω max.
Unterstützte Standards:	HDR (High Dynamic Range), 4K 3D, HDCP 2.2, HDMI™ Ethernet Channel (HEC), 21:9 Cinemascope, Consumer Electronics Control (CEC), Audio Return Channel (ARC), Audio (1536 kHz), Deep Color (36 Bit), x.v.Colour (xvYCC)

High Speed HDMI™ cable with Ethernet

- high-resolution signal transmission with up to 4K @ 60 Hz (downward compatible)
- gold-plated HDMI™ connectors
- integrated Ethernet channel saves additional network or audio cables

Connections:	*2x HDMI™ plug (Type A)*
Cable type:	*round cable*
AWG:	*26-30*
Max. resolution:	*4K Ultra HD 2160p (60 Hz)*
Max. data transmission rate:	*10.2 Gbit/s*
Insulation resistance:	*300 V ⎓, 10 MΩ min.*
Contact resistance:	*30 Ω max.*
Supported standards:	*HDR (High Dynamic Range), 4K 3D, HDCP 2.2, HDMI™ Ethernet Channel (HEC), 21:9 Cinemascope, Consumer Electronics Control (CEC), Audio Return Channel (ARC), Audio (1536 kHz), Deep Color (36 Bit), x.v.Colour (xvYCC)*

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	13.05.2022	ir	HDMI 2.0 Kabel 1500 15,0m (15+1) STD sw LC	1/1
		gepr.:	13.05.2022	aw		
		Norm:			Zeichnungs-Nr.: 60627	von
		Änderungen vorbehalten / *Subject to change*				