



Monitor

User Manual

About this Document

- This Document includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only.
- The information contained in the Document is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of the Document at the Hikvision website (<https://www.hikvision.com>).

Unless otherwise agreed, Hangzhou Hikvision Digital Technology Co., Ltd. or its affiliates (hereinafter referred to as "Hikvision") makes no warranties, express or implied.

- Please use the Document with the guidance and assistance of professionals trained in supporting the Product.

About this Product

This product can only enjoy the after-sales service support in the country or region where the purchase is made.

Acknowledgment of Intellectual Property Rights

- Hikvision owns the copyrights and/or patents related to the technology embodied in the Products described in this Document, which may include licenses obtained from third parties.
- Any part of the Document, including text, pictures, graphics, etc., belongs to Hikvision. No part of this Document may be excerpted, copied, translated, or modified in whole or in part by any means without written permission.
- **HIKVISION** and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions.
- Other trademarks and logos mentioned are the properties of their respective owners.
- **HDMI** The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

LEGAL DISCLAIMER

● TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS DOCUMENT AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.

● YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

● YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE, FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.

● IN THE EVENT OF ANY CONFLICTS BETWEEN THIS DOCUMENT AND THE APPLICABLE LAW, THE LATTER PREVAILS.

© Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

Regulatory Information

FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC compliance: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the EMC Directive 2014/30/EU, the LVD Directive 2014/35/EU, the ROHS Directive 2011/65/EU.



2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info



2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is

marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info

Industry Canada ICES-003 Compliance

This device meets the CAN ICES-3 (A)/NMB-3(A) standards requirements.

Applicable Models

This manual is applicable to the model: Monitor.

Symbol Conventions

The symbols that may be found in this document are defined as follows.

Symbol	Description
 Note	Provides additional information to emphasize or supplement important points of the main text.
 Caution	Indicates a potentially hazardous situation, which if not avoided, could result in equipment damage, data loss, performance degradation, or unexpected results.
 Danger	Indicates a hazard with a high level of risk, which if not avoided, will result in death or serious injury.

Safety Instructions

- Proper configuration of all passwords and other security settings is the responsibility of the installer and/or end-user.
- In the use of the product, you must be in strict compliance with the electrical safety regulations of the nation and region. Please refer to technical specifications for detailed information.
- Input voltage should meet both the SELV (Safety Extra Low Voltage) and the Limited Power Source with 100 to 240 VAC or 12 VDC according to the IEC60950-1 standard. Please refer to technical specifications for detailed information.
- Do not connect several devices to one power adapter as adapter overload may cause over-heating or a fire hazard.
- Please make sure that the plug is firmly connected to the power socket.
- If smoke, odor or noise rise from the device, turn off the power at once and unplug the power cable, and then please contact the service center.
- The mains plug of the equipment is used as disconnect devices, the socket-outlet shall be installed near the equipment and shall be easily accessible;

Note:

Forward tilt of the whole machine is not recommended in use; if there is a need for forward tilt, it is recommended that the forward tilt angle should not exceed 5 degrees.

TABLE OF CONTENTS

1.Introduction	1
1.1 Key Features.....	1
1.2 Power Supply Connection.....	1
2.Device Interfaces.....	2
3. Panel keys	3
4.Basic Operation	4
4.1 Input Source Selection.....	4
4.2 Brightness.....	4
4.3 Audio Volume Adjustment(optional).....	4
4.4 Auto Adjust.....	4
4.5 Main Menu.....	5
4.5.1 Image Settings.....	5
4.5.2 Image Adjustment.....	6
4.5.3 OSD Setting.....	7
4.5.4 Other Settings.....	8
4.5.5 Reset Setting.....	9

Chapter1. Introduction

1.1 Key Features

- Supports 1920 × 1080 FHD display;
- User-friendly operation menu;
- Three image modes to adapt different environment;
- 1 channel HDMI 1.4 input interface;
- Supports software spread-spectrum technology to reduce EMI radiation;
- Standby Power Consumption is lower than 0.5 W;
- Viewing Angle: Horizontal 178°, Vertical 178° ;

1.2 Power Supply Connection

Insert the 3-pin power device into well-grounded socket and turn the rocker switch on.






Figure 1.1 Power Input

- Turn off computer and unplug power cord.
- To plug PC and monitor adapter to the nearest socket.
- If the monitor is not used for a long time, the “POWER” switch of the monitor should be turned off and the adapter plug should be unplugged from the power outlet.


Chapter2. Device Interfaces

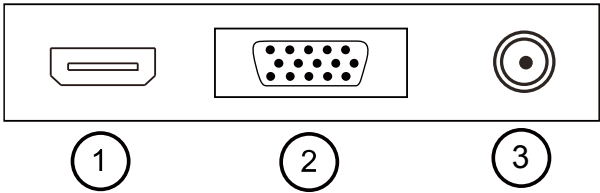

Interfaces		Description
HDMI	IN (1)	HDMI Digital Signal Input
VGA	IN (2)	VGA Analog Signal Input
DC	IN (3)	Power Input

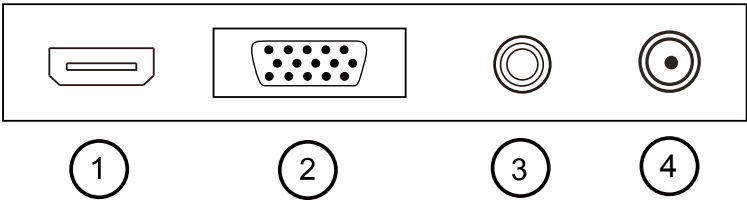

Interfaces		Description
HDMI	IN (1)	HDMI Digital Signal Input
VGA	IN (2)	VGA Analog Signal Input
AUDIO	IN (3)	Audio Input (optional)
DC	IN (4)	Power Input

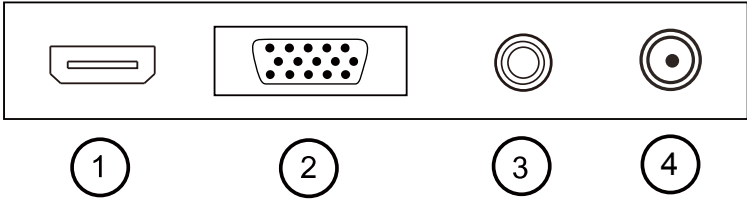

Interfaces		Description
HDMI	IN (1)	HDMI Digital Signal Input
VGA	IN (2)	VGA Analog Signal Input
AUDIO	Out(3)	Audio Output (optional)
DC	IN (4)	Power Input

Figure 2.1 Rear Panel of Device

Chapter3. Panel Keys

Keys on lower right corner of the display unit panel are shown in the following figure.

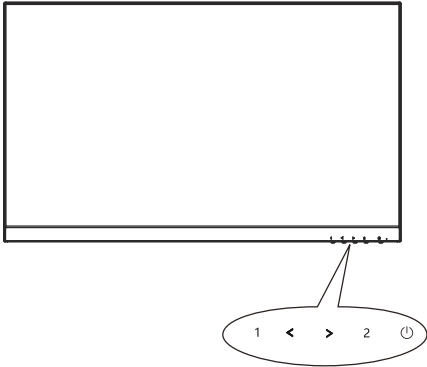


Figure 3.1 Keys on the Display Unit

The functions of the keys on lower right corner of the display unit vary according to different situations.

Chapter4. Basic Operation

4.1 Input Source Selection

Turn on the display unit when the power supply is on and input source is confirmed.

Press ◀ key of the remote controller to enter the menu as shown on the right. Monitor includes 2 input sources as HDMI and VGA signal. Press direction keys to select the input source and press 1 to accomplish the input source selection.



Figure 4.1 Input Source

4.2 Brightness

Press ▶ key of the remote controller to enter the menu as shown on the right. Press ◀ or ▶ to adjust the value of Brightness. Press 1 to finish adjustment.

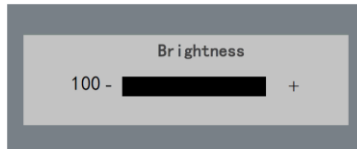


Figure 4.2 Brightness

4.3 Audio Volume Adjustment (optional)

Press ▶ key of the remote controller to enter the menu as shown on the right. press ◀ or ▶ to adjust the value of volume. press **MENU** to accomplish the volume adjustment.



Figure 4.3 Audio Volume (optional)

4.4 AutoAdjust

Turn on the display unit when the power supply is on and input source is confirmed.

Press 2 key of the remote controller to enter the menu as shown on the right (In VGASignal).



Figure 4.4 Input Source

4.5 Main Menu

4.5.1 Image Settings

Purpose:

You can adjust the picture parameters by switching image modes and adjust the values of contrast, brightness, color temperature, auto adjust, color adjust.

Steps:

1. Press **1** key to enter the main menu interface as shown below.
2. Press **1** key to enter the setting you want.
3. Press **◀** or **▶** to adjust the value. It applies for adjusting contrast, brightness, color temp and other parameters.



- Contrast, Brightness: Press **◀** or **▶** to set the contrast, the range varies from 0-100.
- Color temperature : Press **◀** or **▶** to set the color temperature you need.
- Gray indicates that under current mode or current input source condition it is not adjustable; Yellow indicates that it is adjustable.

4. Press **2** key to return to the main menu after accomplishing the adjustment.

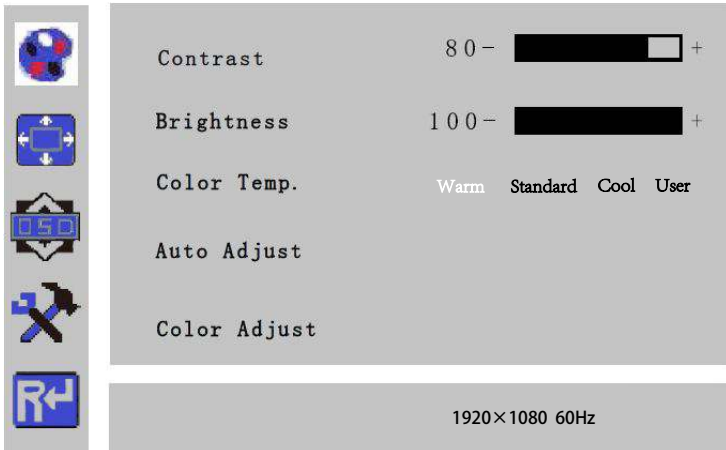


Figure 4.5.1 Image Settings

4.5.2 Image Adjustment

Purpose:

When the input source is selected VGA, you can adjust the VGA parameters. It is for adjusting VGA H position, V Position, clock and phase.

Steps:

1. Press **Menu** key to enter the main menu interface.
2. Press **◀** key to enter the VGA parameter setting interface. (You can select **Auto Adjust** and press **◀** or **▶** to adjust the VGA parameters automatically or adjust it manually)
3. Select **H Position** and press **◀** or **▶** to adjust the **H Position**
4. Select **V Position** and press **◀** or **▶** to adjust the **V position**.
5. Select **Clock** and press **◀** or **▶** to adjust the **clock**.
6. Select **Phase** and press **◀** or **▶** to adjust the **phase**.



The range of the adjustment varies between 0-100.

7. Press **1** key to return to the main menu after accomplishing the adjustment.

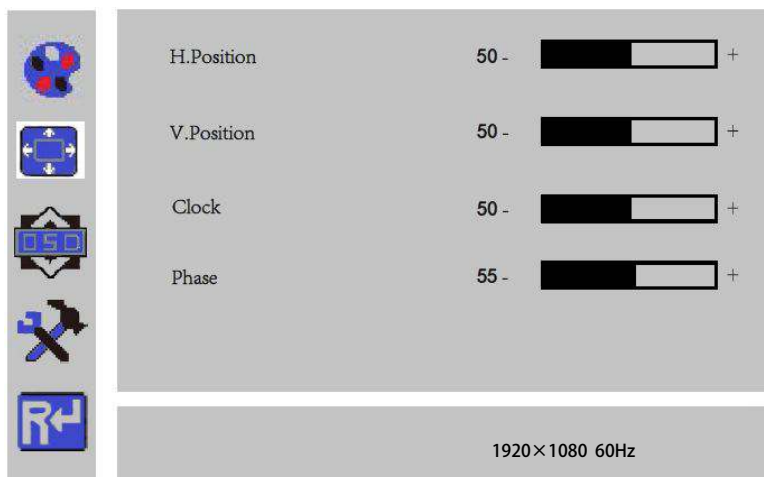


Figure 4.5.2 Image Adjustment

4.5.3 OSD Setting

Purpose:

You can set the language, blending and OSD duration of the menu.

Steps:

1. Press **1** key to enter the main menu interface.
2. Press **◀** key twice and press **1** key to enter the **【Language】** interface, press **◀** or **▶** to switch the language you want.
3. Select **OSD H.Pos/OSD V.Pos** to adjust the position of OSD with **◀** or **▶**.
4. Select **OSD Timer** to adjust the OSD duration with **◀** or **▶**: **55Sec~60Sec**.
5. Select **Transparency** to adjust the OSD transparency value with **◀** or **▶**.
6. Press **2** key to return to the main menu after accomplishing the adjustment.

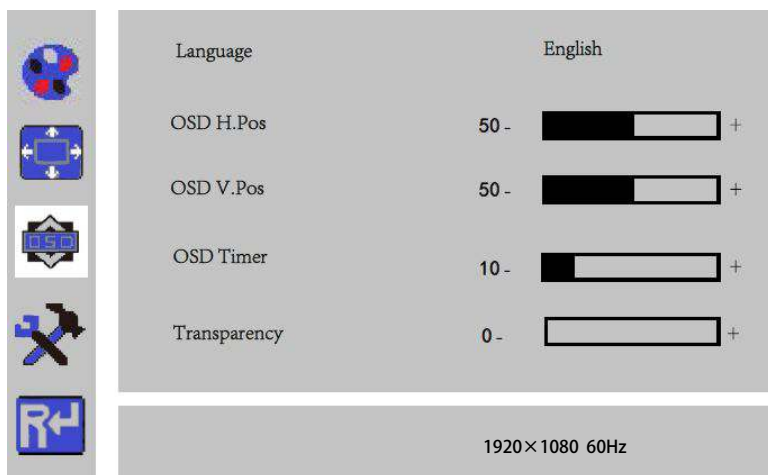


Figure 4.5.3 OSD Setting

4.5.4 Other Settings

Purpose:

You can set Mode, Audio Volume, Signal Source, Aspect Ratio, DCR.

Steps:

1. Press **1** key to enter the main menu interface.
2. Press triple **◀** key and press **1** key to enter the **Mode** interface, press **◀** or **▶** to switch the mode between **PC/GAME/MOVIE**.
3. Press **◀** or **▶** to adjust the Audio Volume from 0~100 (optional) .
4. Press **◀** or **▶** to change the **Signal Source** between **VGA** and **HDMI**.
5. Press **◀** or **▶** to switch the **Aspect Ratio** between **16:9/AUTO/4:3**.
6. Press **◀** or **▶** to switch the **DCR On/Off**.
7. Press **1** key to return to the main menu after accomplishing the adjustment.

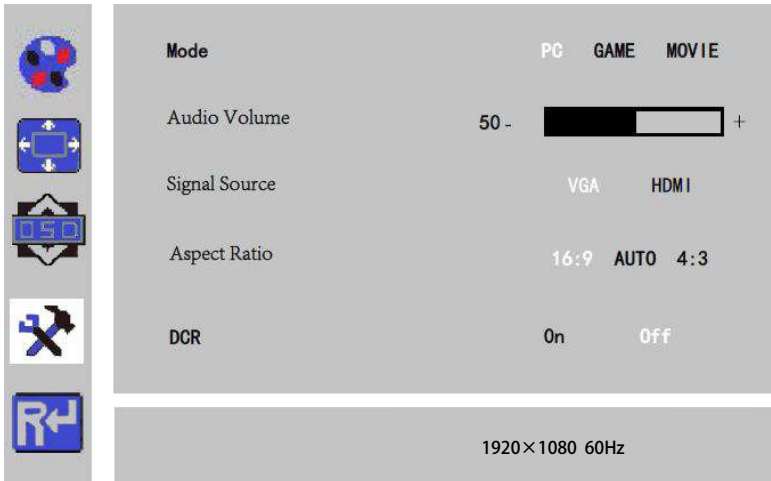


Figure 4.5.4 Other Settings

4.5.5 Reset Setting

Purpose:

You can reset settings to the factory defaults.

Steps:

1. Press **1** key to enter the main menu interface.
2. Press **◀** key 4 times and press **1** key to reset settings to the factory defaults.







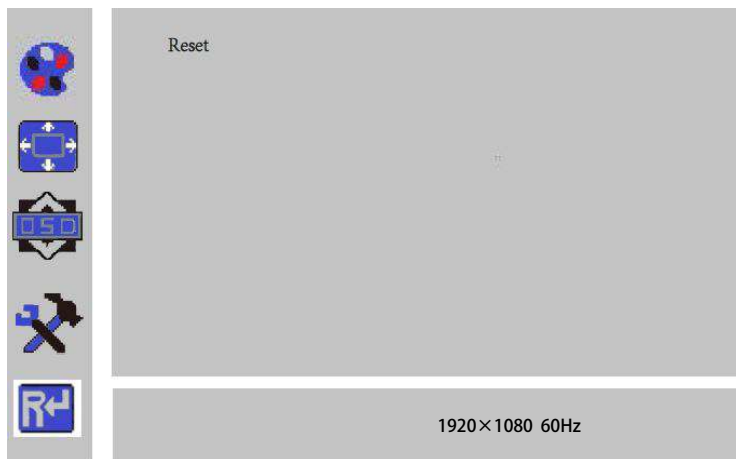


Figure 4.5.5 Reset Setting

Installation of bracket base



Dismantling of bracket base



The appearance scheme supports two types of base (optional).



See Far, Go Further