


INSTRUCTION MANUAL

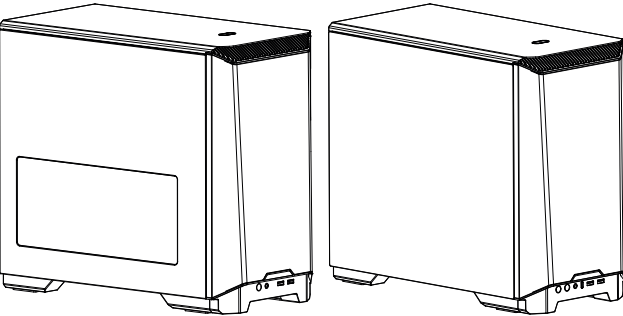

INTRODUCTION

Thank you for choosing Phanteks. Please take a moment to carefully go through the manual. Phanteks will not take responsibility for any damages incurred due to incorrect installation or usage of this product.

This manual supports the following models:
PH-EC200AC_BK (2x 120 mm Black Fans)
PH-EC200ATG_DBK (2x 120 mm D-RGB Fans)

PRODUCT OVERVIEW

CLEARANCE

CPU Cooler Height	165 mm
GPU Clearance	355 mm
GPU Thickness	3-slot, 65mm

FRONT

120 FAN	140 FAN
120 RAD	140 RAD

SIDE

120 FAN	120 RAD
---------	---------

BOTTOM

120 FAN	120 RAD
---------	---------

REAR

120 FAN	120 RAD
---------	---------

P200A PRE-INSTALLED ACCESSORIES:

2x 120 mm Black or 2x 120 mm D-RGB

2x SSD Cover

P200A INCLUDED ACCESSORIES:

6x Zip Ties

21x Motherboard + SSD Screw


4x PSU Screw

3x Case Screw

1x Thumb Screw


1x Vertical GPU Mount

FRONT I/O FEATURES

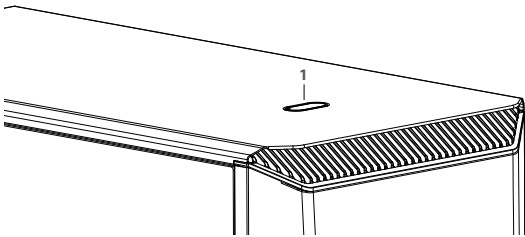


English	Francais	Deutsch	Espanol
1. Power Button	1. Bouton d'alimentation	1. Ein-/Aus Schalter	1. Botón de encendido
2. Reset Button (P200AC Only)	2. Bouton de réinitialisation (P200AC Only)	2. Reset-Knopf (P200AC Only)	2. Botón de reinicio (P200AC Only)
3. D-RGB Mode (P200ATG-D Only)	3. D-RGB Mode (P200ATG-D Only)	3. D-RGB Mode (P200ATG-D Only)	3. D-RGB Mode (P200ATG-D Only)
4. D-RGB Color (P200ATG-D only)	4. D-RGB Color (P200ATG-D Only)	4. D-RGB Color (P200ATG-D Only)	4. D-RGB Color (P200ATG-D Only)
5. Headphone / Microphone	5. Casque / Microphone	5. Kopfhörer / Mikrofon	5. Auricular / Micrófono
6. USB-C Gen 2 (P200ATG-D only)	6. USB-C Gen 2 (P200ATG-D only)	6. USB-C Gen 2 (P200ATG-D only)	6. USB-C Gen 2 (P200ATG-D only)
7. USB 3.0	7. USB 3.0	7. USB 3.0	7. USB 3.0

ECLIPSE P200A Performance (PH-EC200AC_BK)

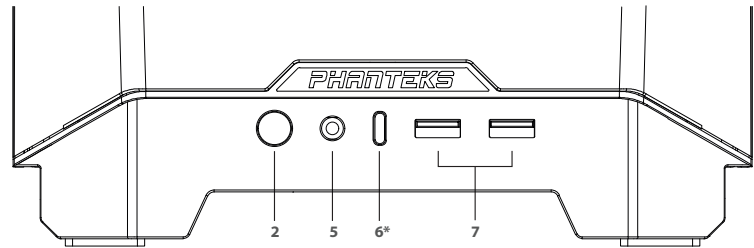

*Optional upgrade

ECLIPSE P200A DIGITAL-RGB (PH-EC200ATG_DBK)

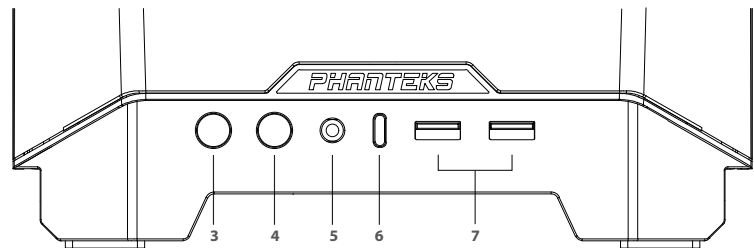

DIGITAL-RGB CONTROLS (P200ATG_D MODEL)

MODES

- SOLID
- BREATHING
- RADAR
- SPARKLE
- RAINBOW

COLORS

PRO TIP: PRESS AND HOLD THE MODE BUTTON TO TURN OFF LEDS PRESS AGAIN TO TURN ON 2 SEC

STEP 1. REMOVING CHASSIS PANELS

a. PULL THE SIDE PANEL, THEN LIFT THE PANEL UP TO REMOVE IT

b. REMOVE FRONT PANEL BY PULLING ON THE PANEL FROM BELOW

c. REMOVE THE BOTTOM DUST FILTER FROM THE FRONT

STEP 2. MOTHERBOARD INSTALLATION

INSTALL THE ITX MOTHERBOARD WITH 4x MOTHERBOARD SCREWS

INSTALL: 4x

STEP 3. POWER SUPPLY INSTALLATION

THE POWER SUPPLY IS INSTALLED THROUGH THE REAR OF THE CHASSIS. LOOSEN THUMBSCREWS TO REMOVE PSU BRACKET. INSTALL PSU TO BRACKET WITH 4x PSU SCREWS.

LOOSEN: 2x

INSTALL: 4x

PRO TIP: Plug in all cables you need for your build into the power supply first before installing it for easier installation

PRO TIP: The right-side panel can be secured with a screw if cables are pushing against it.



STEP 4. STORAGE INSTALLATION - Dedicated 2.5" SSD Bracket

INSTALL THE SSD(S) WITH 4x SSD SCREWS ON THE DEDICATED SSD BRACKET AND MOUNT IT BACK INTO THE CHASSIS.

INSTALL: 4x


STEP 5. STORAGE INSTALLATION - 2.5" SSD Covers

INSTALL THE SSD DRIVE WITH 4x SSD SCREWS ON THE SSD COVER AND MOUNT BACK INTO THE CHASSIS.

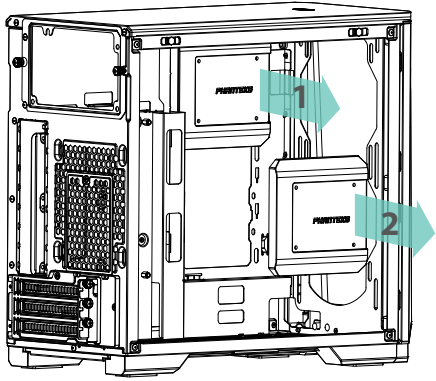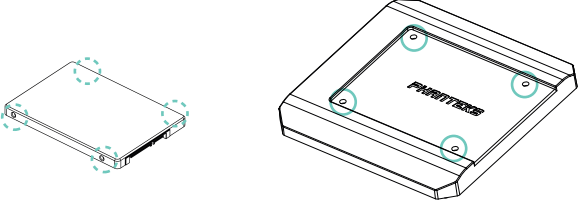


STEP 5. MOTHERBOARD CONNECTIONS

a. CONNECT THE HD-AUDIO & USB 3.0 CABLES

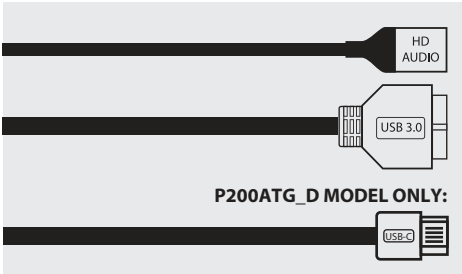

b. CONNECT THE FRONT I/O CABLES TO THE FRONT I/O HEADER ON THE MOTHERBOARD (SEE FRONT I/O HEADER DIAGRAM FOR GENERAL REFERENCE)

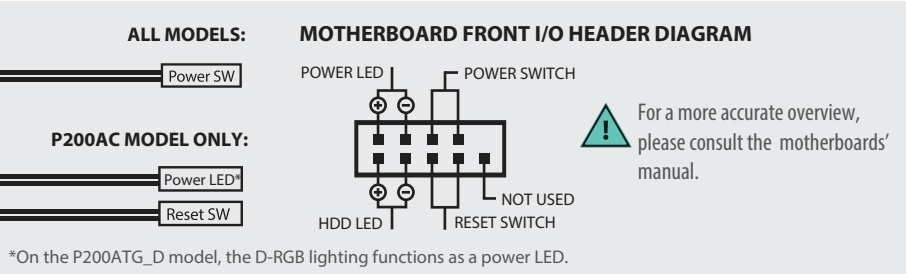


STEP 6. D-RGB LIGHTING - P200ATG_D MODEL ONLY

a. CONNECT THE SATA CABLE TO THE POWER SUPPLY




CONNECT MORE D-RGB PRODUCTS

b. CONNECT D-RGB CONNECTOR TO D-RGB PRODUCTS

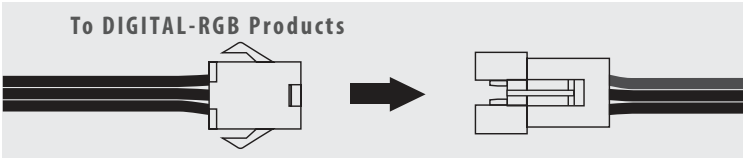

SYNC YOUR CASE LIGHTING TO THE MOTHERBOARD (OPTIONAL)

c. CONNECT MOTHERBOARD D-RGB ADAPTER TO THE MOTHERBOARD

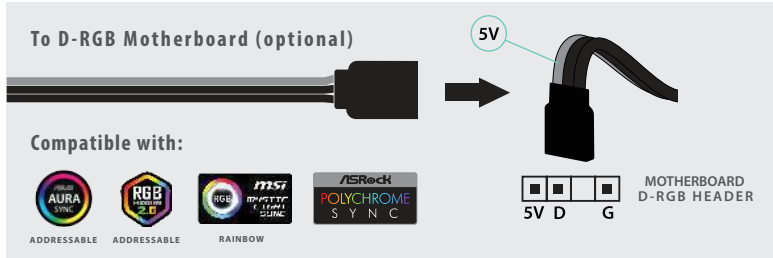


Lighting must be controlled through the motherboard software when connected to the motherboard. The Color and Mode buttons do not work when synced to motherboard.


OPTIONAL UPGRADES

STEP 7. VERTICAL GPU MOUNT - OPTIONAL (RISER CABLE SOLD SEPERATELY. PH-CBRS_FL15)

a. Release the GPU brackets by removing 3 screws.

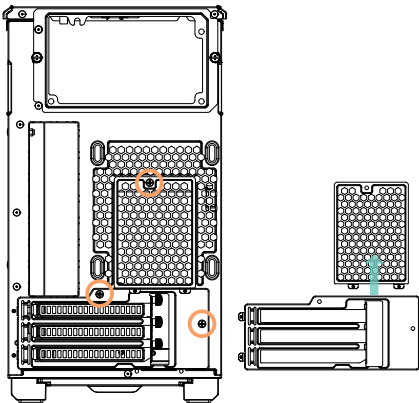


b. Secure the GPU brackets as shown with the same 3 screws.

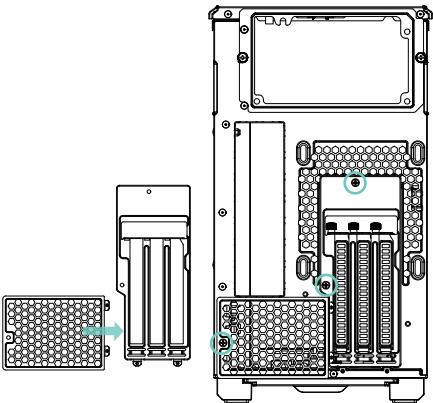

The rear fan position cannot be used with a vertical GPU.

c. Secure the GPU Mount to the bottom of the chassis with the 2 thumb screws. Secure the Riser Cable to the GPU Mount.

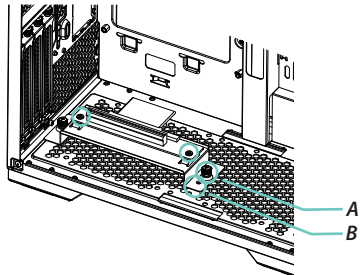


The GPU Mount has two mounting positions. Position A allows for better air cooling and 3-slot GPU cards.


STEP 8. STORAGE INSTALLATION - 3.5" HDD (STACKABLE HDD BRACKET SOLD SEPERATELY. PH-HDDKT_03)

Up to 4 Stackable HDD Brackets can be installed in the side fan locations. These are available separately.

a. INSTALL THE HDD DRIVE INTO THE STACKABLE 3.5" HDD BRACKET.



b. STACK TWO BRACKETS WHEN INSTALLING MORE HDDs. IF NOT, SKIP THIS STEP.

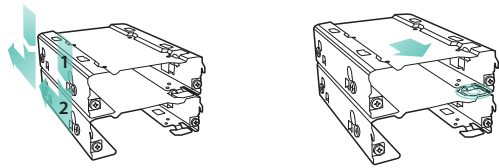

To remove a bracket, press and pull to release.

d. MOUNT THE BRACKETS INTO THE CHASSIS AND SECURE EACH HDD WITH 2 THUMBSCREWS

